



Improvements to the New Comfora Range

We have made a number of improvements to the Comfora range: Wi-Fi connectivity as standard, better energy efficiency, and maximum pipe runs for class 20-35. The Daikin logo has been repositioned to be in line with the other fan coil units.

Wi-Fi Adaptor as Standard

Class 20/25/35:

The small class now has a built-in Wi-Fi adaptor to ensure quick and fast connectivity to the ONEcta App.



Class 50/60/71:

The Wi-Fi adaptor box, including wiring harness, is supplied with the indoor unit. The connecting cable is pre-fitted to the unit, which means only the Wi-Fi adaptor box needs to be connected.



Improved Energy Efficiency, New Outdoor Unit Dimensions and Pipe Runs

Class 20/25/35:

			Model	Current	New	Current	New	Current	New
			Indoor Unit	FTXP20 M 5V1B9	FTXP20 N 5V1B	FTXP25 M 5V1B9	FTXP25 N 5V1B	FTXP35 M 5V1B9	FTXP35 N 5V1B
			Outdoor Unit	RXP20 M 5V1B	RXP20 N 5V1B	RXP25 M 5V1B	RXP25 N 5V1B	RXP35 M 5V1B	RXP35 N 5V1B
Performance	Capacity (Cooling)		kW	2.0	2.0	2.5	2.5	3.5	3.5
	Capacity (Heating)		kW	2.5	2.5	3.0	3.0	4.0	4.0
	SEER			A++	A++	A++	A++	A++	A++
				6.79	7.2	6.92	7.2	6.62	7.2
	SCOP			A++	A++	A++	A++	A++	A++
				4.65	4.65	4.61	4.61	4.64	4.64
Size	IDU (H x W x D)		mm	286 x 770 x 225	286 x 770 x 225	286 x 770 x 225	286 x 770 x 225	286 x 770 x 225	286 x 770 x 225
	ODU (H x W x D)		mm	550 x 658 x 275	556 x 740 x 343	550 x 658 x 275	556 x 740 x 343	550 x 658 x 275	556 x 740 x 343
Installation	Max piping length		m	15	20	15	20	15	20
	Piping length w/o add charge		m	10	10	10	10	10	10
	Level difference IU / OU		m	12	12	12	12	12	12
	Piping connections		Liquid (in/(mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)
			Gas (in/(mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Refrigerant Charge		kg	0.55	0.55	0.55	0.55	0.7	0.7
Function	W-Lan			Option	Standard	Option	Standard	Option	Standard


Note: Preliminary data

Improved

Changed

Please note: due to the new dimensions of the outdoor unit, the depth has increased from 275mm to 343mm. This means that a K.CWB90-2 fixing bracket is required for wall-mounted installations.

Repositioning of the Daikin Logo

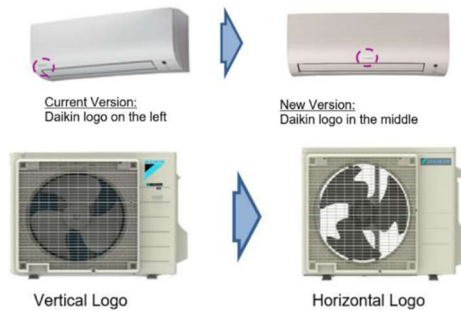

Connectivity and Line up

Indoor Units:

Class	OLD	NEW
20	FTXP20M9	FTXP20N
25	FTXP25M9	FTXP25N
35	FTXP35M9	FTXP35N
50	FTXP50M	FTXP50N
60	FTXP60M	FTXP60N
71	FTXP71M	FTXP71N



Outdoor Units

Class	OLD	NEW
20	RXP20M	RXP20N
25	RXP25M	RXP25N
35	RXP35M	RXP35N
50	RXP50M	RXP50N
60	RXP60M	RXP60N
71	RXP71M	RXP71N



Combinations:

	Pairs		CURRENT											NEW			
			FTXP20M9	FTXP25M9	FTXP35M9	FTXP50M	FTXP60M	FTXP71M	FTXP20N	FTXP25N	FTXP35N	FTXP50N	FTXP60N	FTXP71N			
	OUTDOOR UNIT	CURRENT	RXP20M	OFFICIAL					OFFICIAL								
RXP25M				OFFICIAL					OFFICIAL								
RXP35M					OFFICIAL						OFFICIAL						
RXP50M						OFFICIAL						OFFICIAL					
RXP60M							OFFICIAL						OFFICIAL				
RXP71M								OFFICIAL						OFFICIAL			
NEW		RXP20N	OFFICIAL						OFFICIAL								
		RXP25N		OFFICIAL						OFFICIAL							
		RXP35N			OFFICIAL						OFFICIAL						
		RXP50N				OFFICIAL						OFFICIAL					
		RXP60N					OFFICIAL						OFFICIAL				
		RXP71N						OFFICIAL						OFFICIAL			

[illegible]

Multis			INDOOR UNIT											
			CURRENT						NEW					
			FTXP20M9	FTXP25M9	FTXP35M9	FTXP50M	FTXP60M	FTXP71M	FTXP20N	FTXP25N	FTXP35N	FTXP50N	FTXP60N	FTXP71N
OUTDOOR UNIT	NEW	2MXM40A9	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible
		2MXM50A9	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible
		2MXM68A9	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible
		3MXM40A9	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible
		3MXM52A9	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible
		3MXM68A9	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible	OFFICIAL	OFFICIAL	OFFICIAL	Not Possible	Not Possible	Not Possible
		4MXM68A9	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible
		4MXM80A9	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible
		5MXM90A9	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible	Not Possible

Transition Planning

Pairs:

For existing orders and new orders using the old material reference, we will endeavour to supply the old models. If the old models cannot be supplied, a new quote will need to be raised.

For new orders with new material references, the new Comfora will be supplied.

Please be aware the new Comfora outdoor unit 20/25/35 has new dimensions (556 x 740 x 343) vs the old one 550 x 658 x 275. It now has a total maximum pipe run of 20m vs 15m.

Multis:

The new and old outdoor and indoor units are backwards compatible, so new and existing orders will be processed accordingly.

Pricing and Availability

The prices for the new Comfora (FTXP-N / RXP-N) are the same as the current Comfora (FTXP-M / RXP-M).

The new Comfora 20/25 and 35 are due in April 2023. The Comfora 50/60 and 71 are due in October 2022. The new outdoor units are available from the end of October 2022.

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.

