


Commercial air purification & ventilation



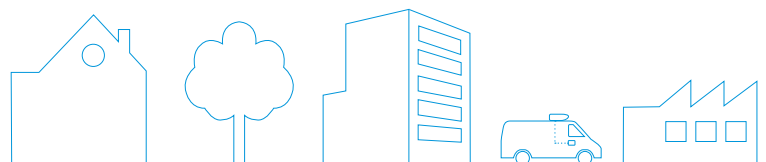

Indoor Air Quality matters more than ever. Since indoor air quality can be up 2 to 5 times worse than outdoor air quality, a correct treatment is important. Daikin offers the widest range in DX commercial ventilation from decentralised heat recovery systems to large-scale air handling units and air purification solutions in order to provide a healthy solution for your project.

Commercial Ventilation & Air Purification

ERV / HRV - Energy/Heat recovery ventilation units	569
Why choose Daikin ventilation	570
VAM-FC9/J8	574
Electrical heater for VAM	575
EKVDX - DX coil for air processing	576
VKM-GBM	578
ALB-LBS/RBS - Modular L Smart	580
Electrical heater for Modular L Smart	581
ATB/ATB-S - Modular T Smart	582
Marketing Tools	584
Supporting tool, software and apps	585
Daikin air handling units with DX connection	588
Commercial air purifier	596
Advantages	596
BR00000554/676/749/751 - AAF Astropure 2000	597
Options & accessories	598


Want to know more about ventilation systems and how indoor air quality can be secured by ventilation? Follow our online webinar via the YouTube playlist.



Why Indoor Air Quality?

- Indoor Air Quality (IAQ) is a measure of the air quality indoors, as breathed in by the building's occupants.
- New residential buildings, schools, offices or light commercial buildings often neglect indoor air quality.
- Because of pollutants, such as pollen, bacteria and others, the indoor air quality can be 2 to 5 times worse than outdoors.
- Since 90% of our lives is spent indoors, it is crucial to invest in good air quality.

5 components for ensuring good Indoor Air Quality

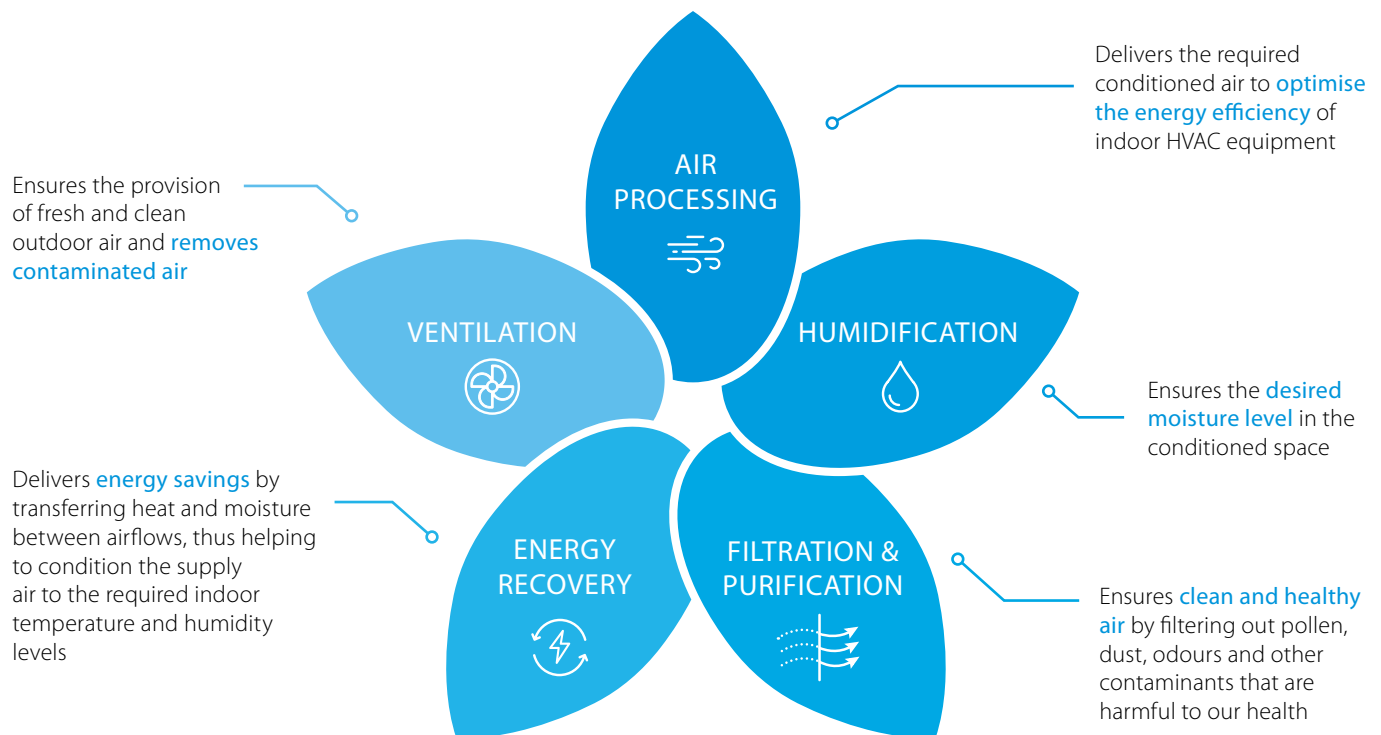


Ventilation

Ventilation systems ensure **optimal climate conditions** by providing a **fresh, healthy and comfortable** environment for buildings of all sizes and applications. When a room is enclosed, air cannot easily enter or leave, allowing airborne pollutants to remain and accumulate within the space. This concentration could have an impact on the health of the room's occupants. **Ventilation is essential for diluting and removing these pollutants.**

A **well-maintained ventilation system** and **adequate air-exchange rate** have been demonstrated to be an effective solution to **protect people** from contaminants, including viruses.



Products overview

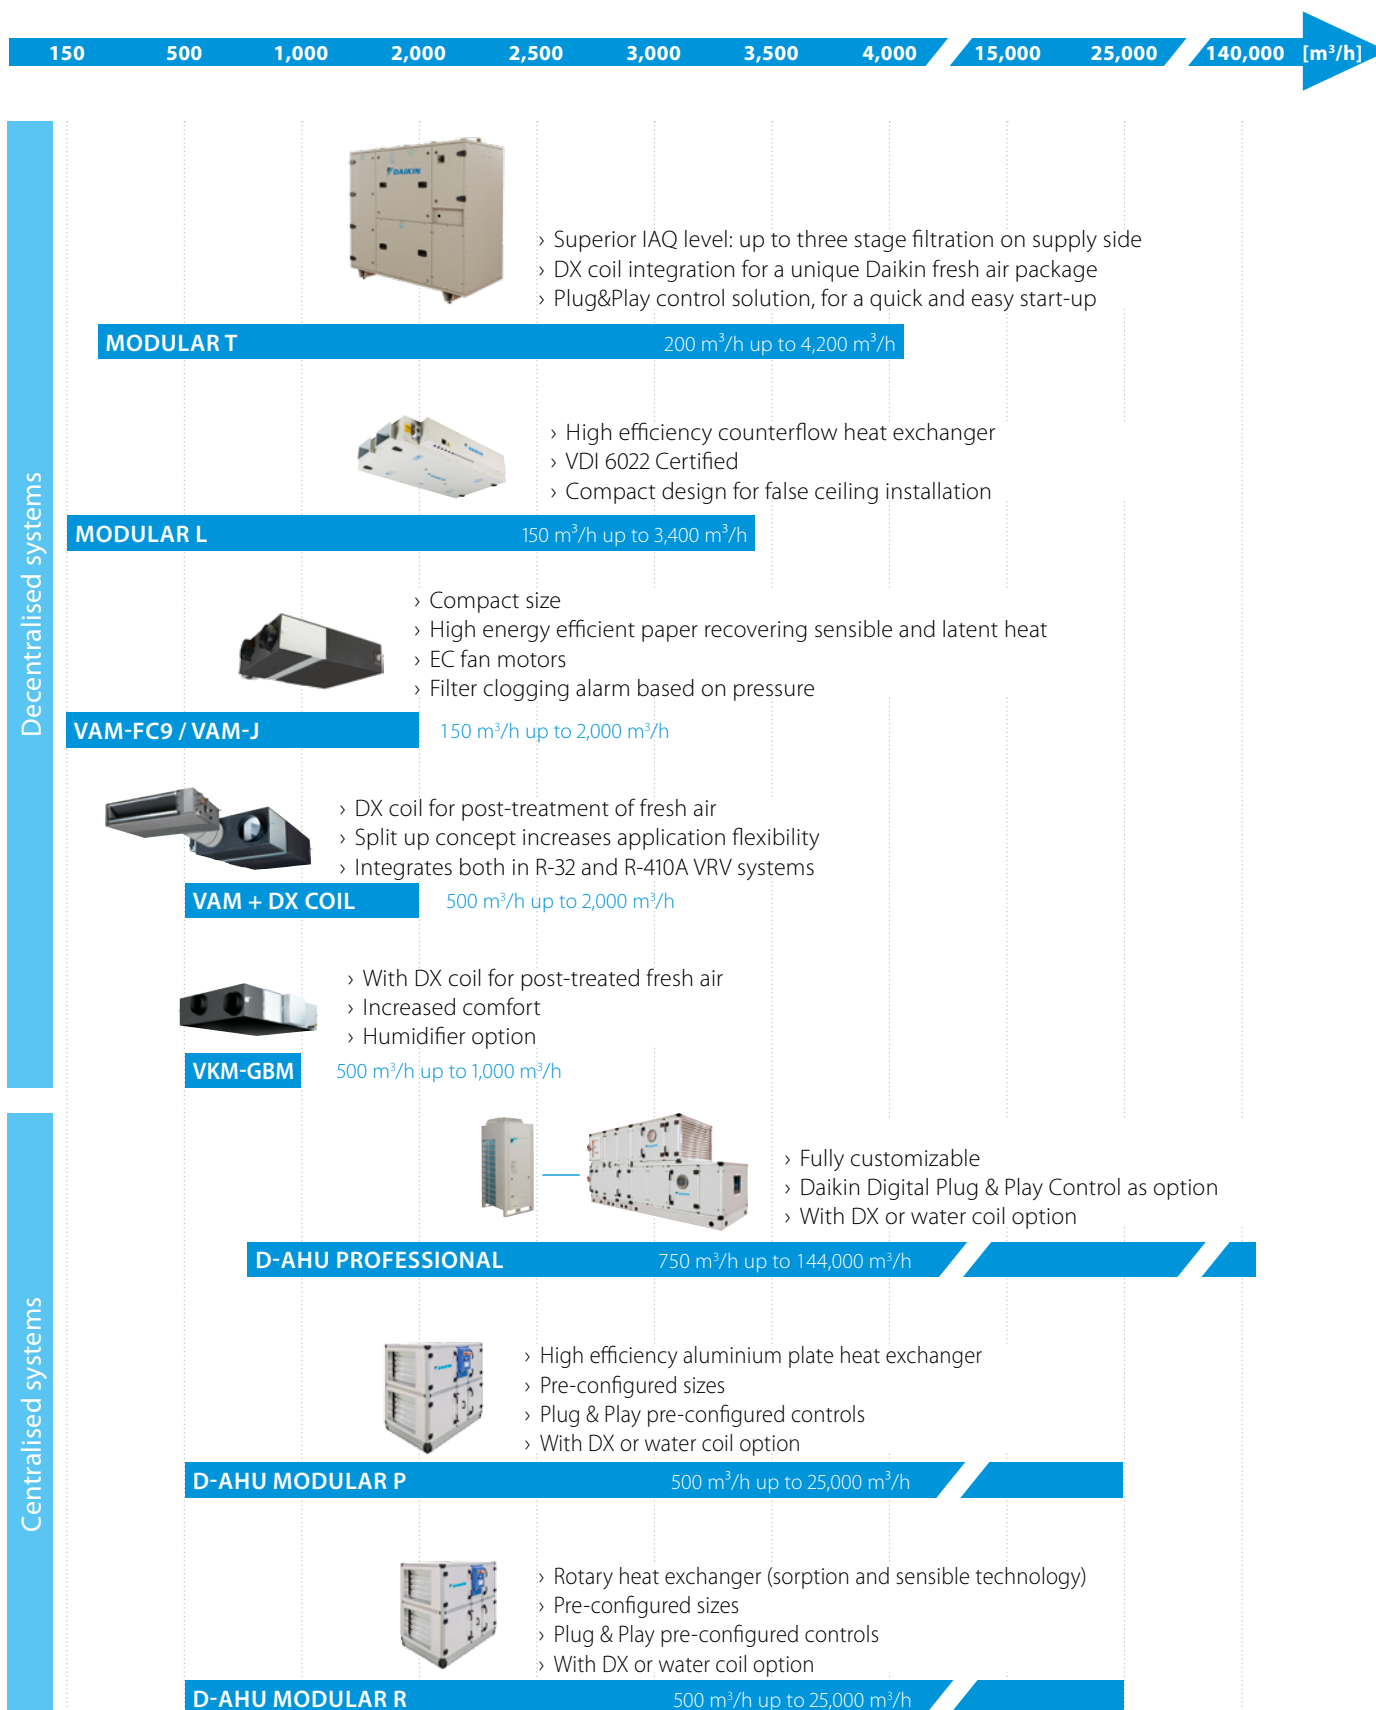

MODULAR T

200 m³/h up to 4,200 m³/h


- › Superior IAQ level: up to three stage filtration on supply side
- › DX coil integration for a unique Daikin fresh air package
- › Plug&Play control solution, for a quick and easy start-up



MODULAR L

150 m³/h up to 3,400 m³/h


- › High efficiency counterflow heat exchanger
- › VDI 6022 Certified
- › Compact design for false ceiling installation



VAM-FC9 / VAM-J

150 m³/h up to 2,000 m³/h

- › Compact size
- › High energy efficient paper recovering sensible and latent heat
- › EC fan motors
- › Filter clogging alarm based on pressure



VAM + DX COIL

500 m³/h up to 2,000 m³/h


- › DX coil for post-treatment of fresh air
- › Split up concept increases application flexibility
- › Integrates both in R-32 and R-410A VRV systems



VKM-GBM

500 m³/h up to 1,000 m³/h

- › With DX coil for post-treated fresh air
- › Increased comfort
- › Humidifier option



D-AHU PROFESSIONAL

750 m³/h up to 144,000 m³/h

- › Fully customizable
- › Daikin Digital Plug & Play Control as option
- › With DX or water coil option



D-AHU MODULAR P

500 m³/h up to 25,000 m³/h

- › High efficiency aluminium plate heat exchanger
- › Pre-configured sizes
- › Plug & Play pre-configured controls
- › With DX or water coil option



D-AHU MODULAR R

500 m³/h up to 25,000 m³/h

- › Rotary heat exchanger (sorption and sensible technology)
- › Pre-configured sizes
- › Plug & Play pre-configured controls
- › With DX or water coil option

5 reasons why Daikin's ventilation range is unique in the market



1 Market leading controls & connectivity

- › Interlock of ventilation and air conditioning system
 - Control ERV/HRV and air conditioning from the same controller
 - Aligns the operation mode between the systems to save energy
- › Easy integration in the total solution
 - Online control and monitoring via the Daikin Cloud Service
 - Full portfolio integration in the intelligent Touch Manager, Daikin's cost-effective mini BMS
- › User-friendly controller with premium design
 - Intuitive touch button control

Madoka



reddot award 2018
winner



2 Unique installation benefits

- › Integrates seamlessly in the Daikin total solution, ensuring a single point of contact
- › Total fresh air solution with Daikin supplying the VAM/Modular L Smart, Modular T and the electrical heater
- › Daikin AHU and condensing unit connect Plug & Play thanks to same pipe diameters, factory mounted controls, expansion valves, etc.





3 High energy efficiency

- › Energy recovery of up to 92%, reducing running costs
- › Free nighttime cooling using fresh outside air
- › Inverter driven centrifugal fans
- › ErP compliant

Up to
92%
energy
recovery

4 Best comfort

- › Wide range of units to control fresh air and humidity
- › Wide range of optional filters to suit the application available up to ePM₁ 80% (F9)
- › Special paper heat exchanger recovers heat and moisture from extract air to warm up and humidify fresh air to comfortable levels (VAM, VKM)

5 Top reliability

- › Most extensive testing before new units leave the factory
- › Widest support network and after sales service
- › All spare parts available in Europe



Did you know?

CO₂ levels and ventilation rates all have significant, independent impacts on cognitive function:

Please refer to our dedicate page on Indoor Air Quality for more information.



COGNITIVE FUNCTION SCORES ...



+ 61%
IN GREEN BUILDING
CONDITIONS



+ 101%
IN ENHANCED
GREEN BUILDING CONDITIONS

Widest range of DX integrated ventilation on the market

Daikin offers a variety of solutions from small energy recovery ventilation to large-scale air handling units for the provision of fresh air ventilation to homes, or commercial premises.

Ventilation solutions

Daikin offers state-of-the-art ventilation solutions that can easily be integrated into any project:

- › **Unique portfolio** within DX manufacturers
- › High-quality solutions complying with the **highest Daikin quality standards**
- › **Seamless integration** of all products to provide the best indoor climate
- › All Daikin products connected to a single controller for **complete control** of the HVAC system.

Energy Recovery Ventilation

Our energy recovery units **recover sensible energy** (Modular L / Modular T) or **total (sensible + latent) energy** (VAM/EKVDX/VKM-GBM), substantially reducing the load on the air conditioning system up to 40%.

Ventilation with DX connection - Control over fresh air temperature


Daikin offers a range of inverter condensing units to be used in combination with Daikin AHUs for ultimate control over the fresh air. There are 4 control possibilities when **combining AHU and Daikin outdoor units** hence offering all the required flexibility for any installation. Indoor units can be combined to the same outdoor unit to reduce the installation costs. For **false-ceiling installations** where space is a constraint, the VKM can fit perfectly to deliver fresh air at a comfortable temperature and it has an optional humidification element.



Energy recovery ventilation

Ventilation with heat recovery as standard

- › Thinnest High Efficiency Enthalpy Heat Exchanger in the market (J-series)
- › Energy saving ventilation using indoor heating, cooling and moisture recovery
- › Free cooling possible when outdoor temperature is below indoor temperature (eg. during nighttime)
- › Prevent energy losses from over-ventilation while improving indoor air quality with optional CO₂ sensor (J-series)
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume (J-series)
- › Can be used as stand alone or integrated in the Sky Air or VRV system
- › Wide range of units: air flow rate from 150 up to 2,000 m³/h
- › Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installation
- › No drain piping needed
- › Can operate in over- and under pressure
- › Total solution for fresh air with Daikin supply of both VAM / VKM and electrical heaters
- › VAM-J8 series are connectable to EKVDX DX coil for air processing
- › Possibility of CO₂ concentration when combining VAM-J8 with optional BRYMA CO₂ sensor and Madoka remote controller (with or without EKVDX)

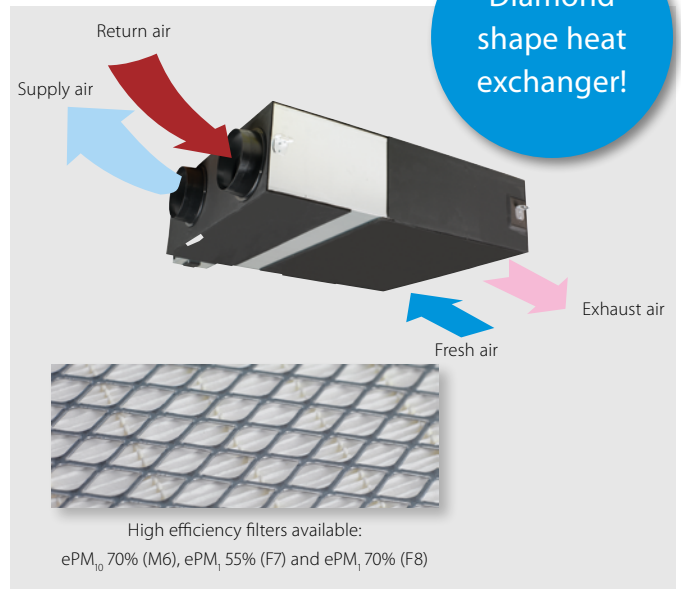

More details and final information can be found by scanning or clicking the QR codes.



VAM-FC9



VAM-J8

Ventilation			VAM/VAM	150FC9	250FC9	350J8	500J8	650J8	800J8	1000J8	1500J8	2000J8	
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.097/0.070/0.039	0.164/0.113/0.054	0.247/0.173/0.081	0.303/0.212/0.103	0.416/0.307/0.137	0.548/0.384/0.191	0.833/0.614/0.273
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.132/0.111/0.058	0.161/0.079/0.064	0.085/0.061/0.031	0.148/0.100/0.045	0.195/0.131/0.059	0.289/0.194/0.086	0.417/0.300/0.119	0.525/0.350/0.156	0.835/0.600/0.239
Temperature exchange efficiency - 50Hz	Ultra high/High/Low			%	77.0(1)/72.0(2)/78.3(1)/72.3(2)/82.8(1)/73.2(2)	74.9(1)/69.5(2)/76.0(1)/70.0(2)/80.1(1)/72.0(2)	85.1/86.7/90.1	80.0/82.5/87.6	84.3/86.4/90.5	82.5/84.2/87.7	79.6/81.8/86.1	83.2/84.8/88.1	79.6/81.8/86.1
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low		%	60.3(1)/61.9(1)/67.3(1)	60.3(1)/61.2(1)/64.5(1)	65.2/67.9/74.6	59.2/61.8/69.5	59.2/63.8/73.1	67.7/70.7/76.8	62.6/66.4/74.0	68.9/71.8/77.5	62.6/66.4/74.0
	Heating	Ultra high/High/Low		%	66.6(1)/67.9(1)/72.4(1)	66.6(1)/67.4(1)/70.7(1)	75.5/77.6/82.0	69.0/72.2/78.7	73.1/76.3/82.7	72.8/75.3/80.2	68.6/71.7/77.9	73.8/76.1/80.8	68.6/71.7/77.9
Operation mode				Heat exchange mode, bypass mode, fresh-up mode									
Heat exchange system				Air to air cross flow total heat (sensible + latent heat) exchange									
Heat exchange element				Specially processed non-flammable paper									
Dimensions	Unit	HeightxWidthxDepth		mm	285x776x525		301x1,113x886		368x1,354x920		368x1,354x1,172		731x1,354x1,172
Weight	Unit			kg	24.0		46.5		61.5		79.0		157
Casing	Material		Galvanised steel plate										
Fan	Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low	m³/h	150/140/105	250/230/155	350(1)/300(1)/200(1)	500(1)/425(1)/275(1)	650(1)/550(1)/350(1)	800(1)/680(1)/440(1)	1,000(1)/850(1)/550(1)	1,500(1)/1,275(1)/825(1)	2,000(1)/1,700(1)/1,100(1)
		Bypass mode	Ultra high/High/Low	m³/h	150/140/105	250/230/155	350(1)/300(1)/200(1)	500(1)/425(1)/275(1)	650(1)/550(1)/350(1)	800(1)/680(1)/440(1)	1,000(1)/850(1)/550(1)	1,500(1)/1,275(1)/825(1)	2,000(1)/1,700(1)/1,100(1)
	External static pressure - 50Hz	Ultra high/High/Low		Pa	90/87/40	70/63/25	90(1)/70.0/50.0(1)						
Air filter	Type	Multidirectional fibrous fleeces											
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low		dBA	27.0/26.0/20.5	28.0/26.0/21.0	34.5(1)/32.0(1)/29.0(1)	37.5(1)/35.0(1)/30.5(1)	39.0(1)/36.0(1)/31.0(1)	39.0(1)/36.0(1)/30.5(1)	42.0(1)/38.5(1)/32.5(1)	42.0(1)/39.0(1)/33.5(1)	45.0(1)/41.5(1)/36.0(1)
	Bypass mode	Ultra high/High/Low		dBA	27.0/26.5/20.5	28.0/27.0/21.0	34.5(1)/32.0(1)/28.0(1)	38.0(1)/35.0(1)/29.5(1)	38.0(1)/34.5(1)/30.5(1)	40.0(1)/36.5(1)/30.5(1)	42.5(1)/40.0(1)/32.5(1)	42.0(1)/39.0(1)/32.5(1)	45.0(1)/41.0(1)/35.0(1)
Operation range	Around unit			°CDB	-		0°C~40°CDB, 80% RH or less						
Connection duct diameter				mm	100	150	200		250		2x250		
Power supply	Phase/Frequency/Voltage			Hz/V	1~; 50/60; 220-240/220								
Current	Maximum fuse amps (MFA)			A	15.0				16.0				
Specific energy consumption (SEC)	Cold climate			kWh/(m².a)	-56.0(5)	-60.5(5)	-						
	Average climate			kWh/(m².a)	-22.1(5)	-27.0(5)	-						
	Warm climate			kWh/(m².a)	-0.100(5)	-5.30(5)	-						
SEC class					D / See note 5 B / See note 5								
Maximum flow rate at 100 Pa ESP	Flow rate			m³/h	130	207	-						
	Electric power input			W	129	160	-						
Sound power level (Lwa)				dB	40	43	51	54	58	61	62	65	
Annual electricity consumption				kWh/a	18.9(5)	13.6(5)	-						
Annual heating saved	Cold climate			kWh/a	41.0(5)	40.6(5)	-						
	Average climate			kWh/a	80.2(5)	79.4(5)	-						
	Warm climate			kWh/a	18.5(5)	18.4(5)	-						

(1) Measured according to JIS B 8628 | (2) Measured at reference flow rate according to EN13141-7 | (5) At reference flow rate in accordance with commission regulation (EU) No 1254/2014

Electrical heater for VAM

- › Total solution for fresh air with Daikin supply of both VAM and electrical heaters
- › Increased comfort in low outdoor temperature thanks to the heated outdoor air
- › Integrated electrical heater concept (no additional accessories required)
- › Standard dual flow and temperature sensor
- › Flexible setting with adjustable setpoint
- › Increased safety with 2 cut-outs: manual & automatic



More details and final information can be found by scanning or clicking the QR codes.



GSIEKA


	GSIEKA	10009	15018	20024	25030	35530 ⁽¹⁾
Capacity	kW	0.9	1.8	2.4	3.0	3.0
Duct diameter	mm	100	150	200	250	355
Connectable VAM		VAM150FC9	VAM250FC9	VAM350,500J8	VAM650J8, VAM800J8, VAM1000J8	VAM1500J8, VAM2000J8

			GSIEKA10009	GSIEKA15018	GSIEKA20024	GSIEKA25030	GSIEKA35530
Dimensions	Height	mm	171	221	271	321	426
	Depth	mm	100	150	200	250	355
	Width	mm	370	370	370	370	373
Minimum air velocity / airflow		m/s	1.5				
		m³/h	45	100	170	265	535
Power supply			1~230 VAC/50Hz				
Nominal current	A		4.1	8.2	10.9	13.1	13.1
Heating power	kW		0.9	1.8	2.4	3.0	3.0
Connection duct diameter	mm		100	150	200	250	355
Operation range	Min.	°C	-40°C				
	Max.	°C	40°C				
	Rel. Humidity	%	90%				
Temperature sensor			10 kΩ at +25°C / TJ-K10K				
Temperature sensor range			- 30°C to 105°C				
Temperature set point range			- 10°C to 50°C				
LED indicators	LED 1	flashing every 5 seconds	heater is starting up				
		flashing every second	air flow detected, heating allowed				
		OFF	no power supply or no flow				
	LED 2	ON	problem with duct temperature sensor, set point potentiometer or PTC airflow sensor				
		OFF	heater is not operating				
		ON	heater is operating				
Ambient temperature adjacent to controller			0°C to +50°C				
Auto high temperature cut-out			50°C				
Manual reset high temperature cut-out			100°C				

EKVDX-A

DX coil for post treatment of fresh air




Supply air

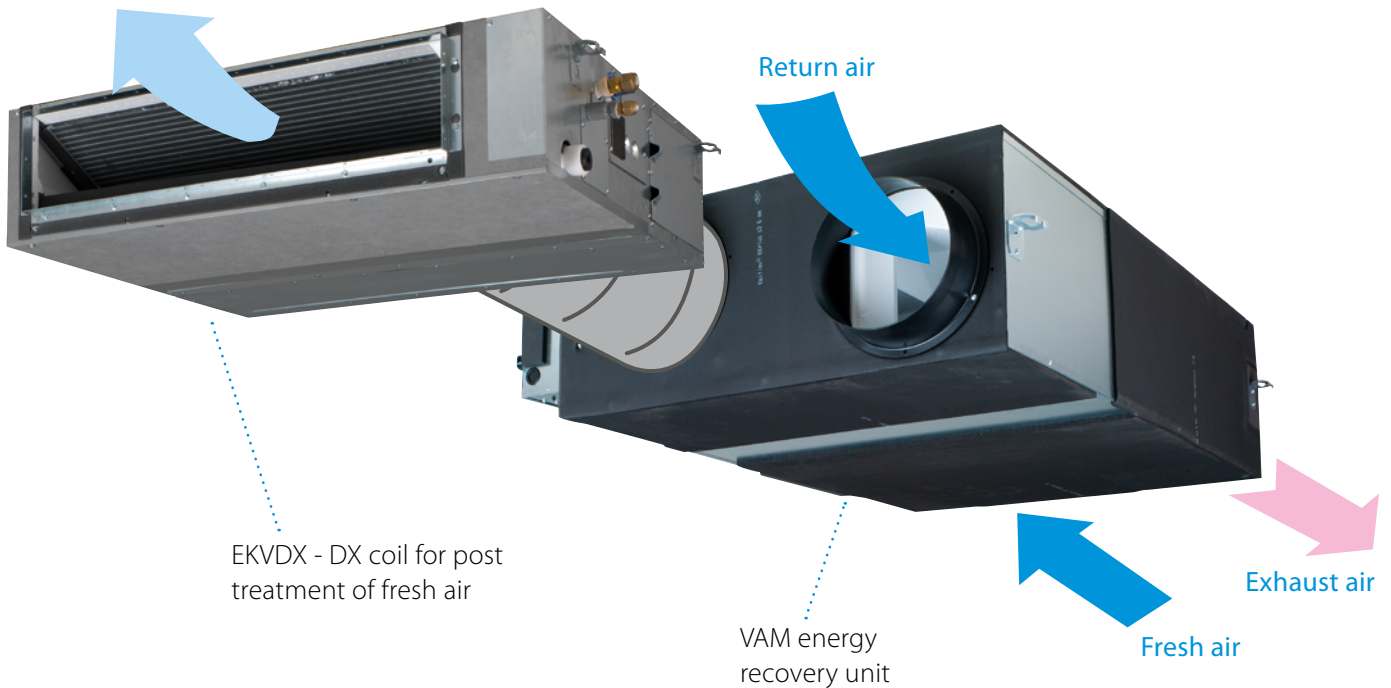

EKVDX - DX coil for post treatment of fresh air

VAM energy recovery unit

- › Creates a high quality indoor environment by pre conditioning of incoming fresh air
- › Maximum installation flexibility thanks to separate DX coil
 - Different installation possibilities to suit the application

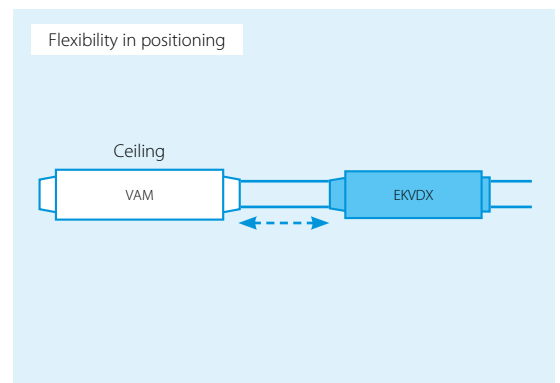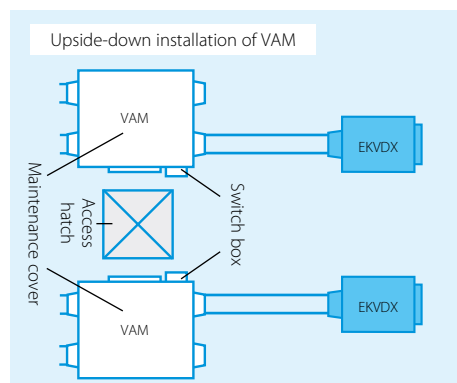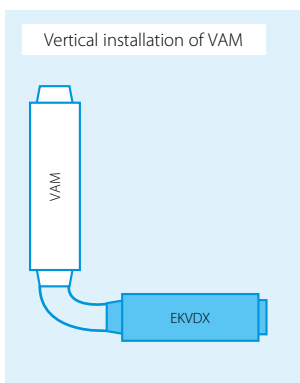


- › Fresh air flows from 500 up to 2,000 m³/h
- › High ESP up to 150 Pa
- › Can be integrated in both R-32/R-410A VRV systems
- › Replaces VKM-GB range, delivering increased capacity range and reduced sound levels

DX coil for air processing

Post heating or cooling of fresh air to lower the load on the air conditioning system

- › Creates a high quality indoor environment by pre conditioning of incoming fresh air
- › Maximum installation flexibility thanks to separate DX coil
- › Wide range of units covering fresh air flows of 500 up to 2,000 m³/h
- › High ESP up to 150 Pa
- › Can be integrated in both R-32/R-410A VRV systems

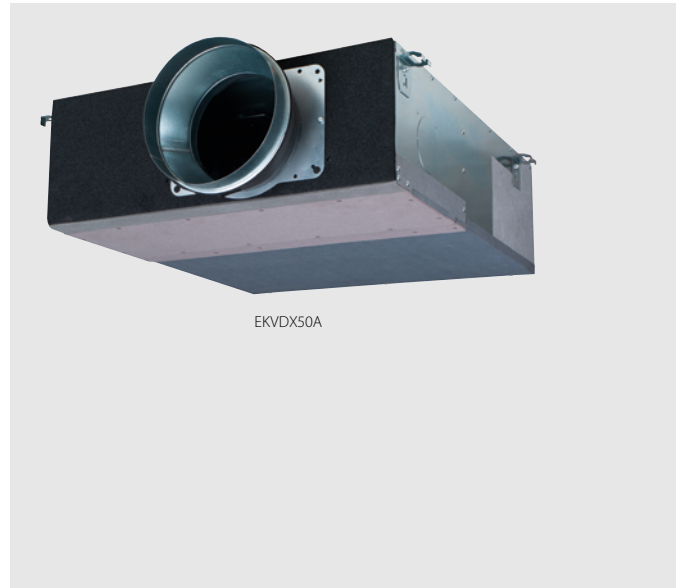

More details and final information can be found by scanning or clicking the QR codes.



EKVDX-A

				EKVDX32A	EKVDX50A	EKVDX80A	EKVDX100A
Power input - 50Hz	Cooling	Nom.	kW	0.035	0.035	0.035	0.035
	Heating	Nom.	kW	0.035	0.035	0.035	0.035
Casing	Material			Galvanised steel plate			
Insulation material				Opcell and anti-sweat material			
Dimensions	Unit	Height	mm	250			
		Width	mm	550	700	1,000	1,400
		Depth	mm	809			
Weight	Unit		kg	19	23.4	30.1	37.7
Operation range	Around unit		°CDB	10°C~40°CDB, 80% RH or less			
	On coil	Cooling	Max.	°CDB	35		
	temperature	Heating	Min.	°CDB	11		
Piping connections	Liquid	OD	mm	6.35			
	Gas	OD	mm	12.7			
	Drain			VP20 (I.D. 20/O.D. 26), drain height 625 mm			
Refrigerant	Type			R410A/R32			
	GWP			2,087.5/675			
Heat exchange system				Direct expansion			
Power supply	Phase			single phase			
	Frequency			50/60			
	Voltage			220-240/220			

Possible Combination VAMJ8 + EKDVX				EKVDX32A + VAM500J8	EKVDX50A + VAM650J8	EKVDX50A + VAM800J8	EKVDX80A + VAM1000J8	EKVDX100A + VAM1500J8	EKVDX100A + VAM2000J8	
Cooling capacity	Total (VAM+DX coil)	At ultra high fan speed	kW	5.1	7.1	8.6	9.3	15.4	18.4	
	DX coil	At ultra high fan speed	kW	3.4	4.8	5.5	5.7	9.5	11.2	
		At high fan speed	kW	2.7	4.1	4.4	4.5	8.8	9.2	
Heating capacity	Total (VAM+DX coil)	At ultra high fan speed	kW	6.7	8.5	11	11.9	18.7	22.9	
	DX coil	At ultra high fan speed	kW	4.2	5.1	6.9	7	10.8	13	
		At high fan speed	kW	3.6	4.6	5.8	6.3	9.6	11.7	
Fan	Air flow rate - 50Hz	Heat exchange mode	Ultra high	m³/h	500	650	800	1,000	1,500	2,000
			High	m³/h	425	550	680	850	1,275	1,700
		Bypass mode	Ultra high	m³/h	500	650	800	1,000	1,500	2,000
			High	m³/h	425	550	680	850	1,275	1,700
	External static pressure - 50Hz	Maximum	Pa	81.9	73.0	133.7	106.0	153.6	92.1	
		Ultra high	Pa	51.9	43.0	23.7	26.0	43.6	12.1	
			High	Pa	39.0	33.9	19.4	21.4	35.1	11.9
Sound pressure level - 50Hz	Cooling	Ultra high	dBA	32	34	35.5	40.5	38.5	43.5	
		High	dBA	30.5	32	34	38	37	40	
	Heating	Ultra high	dBA	32.5	34.5	36	40.5	39	44	
		High	dBA	31.5	32	34	38.5	37	40.5	
Current	Maximum fuse amps (MFA)		A	6	6	6	6	16	16	

The heat reclaim ventilation unit and the EKVDX indoor unit MUST share the same electrical safety devices and power supply

Energy recovery ventilation, humidification and air processing

Post heating or cooling of fresh air for lower
load on the air conditioning system

- › Energy saving ventilation using indoor heating, cooling and moisture recovery
- › Creates a high quality indoor environment by pre conditioning of incoming fresh air
- › Humidification of the fresh air results in comfortable indoor humidity level, even during heating
- › Free cooling possible when outdoor temperature is below indoor temperature (eg. during nighttime)
- › Low energy consumption thanks to DC fan motor
- › Prevent energy losses from over-ventilation while improving indoor air quality with optional CO₂ sensor
- › Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installation
- › Specially developed heat exchange element with High Efficiency Paper (HEP)
- › Can operate in over- and under pressure



VKM80-100GBM

More details and final information
can be found by scanning or
clicking the QR codes.



VKM-GBM

Ventilation		VKM-GBM		50GBM		80GBM		100GBM			
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.270/0.230/0.170		0.330/0.280/0.192		0.410/0.365/0.230		
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.270/0.230/0.170		0.330/0.280/0.192		0.410/0.365/0.230		
Fresh air conditioning load	Cooling			kW	4.71/1.91/3.5		7.46/2.96/5.6		9.12/3.52/7.0		
	Heating			kW	5.58/2.38/3.5		8.79/3.79/5.6		10.69/4.39/7.0		
Temperature exchange efficiency - 50Hz	Ultra high/High/Low			%	76/76/77.5		78/78/79		74/74/76.5		
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low		%	64/64/67		66/66/68		62/62/66		
	Heating	Ultra high/High/Low		%	67/67/69		71/71/73		65/65/69		
Operation mode					Heat exchange mode / Bypass mode / Fresh-up mode						
Heat exchange system					Air to air cross flow total heat (sensible + latent heat) exchange						
Heat exchange element					Specially processed non-flammable paper						
Humidifier					Natural evaporating type						
Dimensions	Unit	HeightxWidthxDepth		mm	387x1,764x832		387x1,764x1,214				
Weight	Unit			kg	100		119		123		
Casing	Material				Galvanised steel plate						
Fan-Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low		m³/h	500/500/440		750/750/640		950/950/820		
	Bypass mode	Ultra high/High/Low		m³/h	500/500/440		750/750/640		950/950/820		
Fan-External static pressure - 50Hz	Ultra high/High/Low			Pa	200/150/120		205/155/105		110/70/60		
Air filter	Type				Multidirectional fibrous fleeces						
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low		dBA	38/36/34		40/37.5/35.5		40/38/35.5		
	Bypass mode	Ultra high/High/Low		dBA	39/36/34.5		41/38/36		41/39/35.5		
Operation range	Around unit			°CDB	0°C~40°CDB, 80% RH or less						
	Supply air			°CDB	-15°C~40°CDB, 80% RH or less						
	Return air			°CDB	0°C~40°CDB, 80% RH or less						
	On coil temperature			Cooling/Max./Heating/Min.	°CDB	-15/43					
Refrigerant	Control				Electronic expansion valve						
	Type				R-410A						
	GWP				2,087.5						
Connection duct diameter				mm	200		250				
Piping connections	Liquid	OD		mm			6.35				
	Gas	OD		mm			12.7				
	Water supply			mm			6.4				
	Drain						PT3/4 external thread				
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240						
Current	Maximum fuse amps (MFA)			A	15						



Modular L Smart

Premium efficiency heat recovery unit

Highlights

- › Connects Plug&Play into the Sky Air and VRV control network
- › Easy installation and commissioning
- › Internal pre-filter stage (up to ePM₁ 50% (F7) + ePM₁ 80% (F9)) making the unit reach highest indoor air quality requirements.
- › Wide air flow coverage from 150m³/h to 3,400m³/h
- › Exceeding ErP 2018 requirements
- › Best choice when compactness is needed (only 280 mm height up to 550 m³/h)
- › 50 mm double skin panel (120 kg/m³) for a maximum sound and thermal insulation

EC centrifugal fan

- › Maximum ESP available 600 Pa (depending on model sizes and airflow)
- › Inverter driven with IE4 premium efficiency motor
- › High-efficient blade profiling
- › Reduced energy consumption
- › Optimized SFP (Specific Fan Power) for an efficient unit operation

Heat exchanger

- › Premium quality counter flow plate heat exchanger
- › Up to 91% of the thermal energy recovered
- › High grade aluminum allowing optimum corrosion protection



Right drain connection (ALB-RBS)



Left drain connection (ALB-LBS)

For integration with Applied systems, please refer to the Modular L, in the AHU chapter



More details and final information can be found by scanning or clicking the QR codes.



ALB-LBS



ALB-RBS

Technical details

D-AHU Modular L Smart			ALB02*BS	ALB03*BS	ALB04*BS	ALB05*BS	ALB06*BS	ALB07*BS
Airflow		m³/h	300	600	1,200	1,600	2,300	3,000
Heat exchanger thermal efficiency (1)		%	86		87			86
External static pressure	Nom.	Pa	100					
Current	Nom.	A	0.61	1.35	2.26	2.83	4.39	6.22
Power input	Nom.	kW	0.14	0.31	0.52	0.65	1.01	1.43
SFPv (2)		kW/m³/s	1.25	1.52	1.3	1.35	1.35	1.51
Electrical supply	Phase	ph	1					
	Frequency	Hz	50/60					
	Voltage	V	220/240 Vac					
Main unit dimensions	Width	mm	920	1,100	1,600		2,000	
	Height	mm	280	350	415		500	
	Length	mm	1,660	1,800	2,000			
Rectangular duct flange	Width	mm	250	400	500		700	
	Height	mm	150	200	300		400	
Weight unit		kg	125	180	270	280	355	360

(1) Winter design condition: Outdoor: -5°C, 90% Indoor: 22°C, 50% | (2) SFPv is a parameter that quantifies the fan efficiency (the lower it is the better will be). This reduces if airflow decreases.

Electrical heater for Modular L Smart

- › Total solution for fresh air with Daikin supply of both Modular L Smart and electrical heaters
- › Increase comfort in low outdoor temperature thanks to the heated outdoor air
- › Integrated electrical heater concept (no additional accessories required)
- › Standard dual flow and temperature sensor
- › Heater only consumes what is required to pre-heat to the desired minimum fresh air temperature; thus saving energy



More details and final information can be found by scanning or clicking the QR codes.



ALD-HEFB

Electrical heater for Modular L Smart (ALD)	02HEFB	03HEFB	05HEFB	07HEFB
Capacity kW	1.5	3	7.5	15
Connectable Modular L Smart size	02	03	04, 05	06, 07
Supply voltage	230V,1ph		400V,3ph	
Output current (maximum) (A)	6.6	13.1	10.9	21.7
Temperature sensor	15k ohms at -20 °C 10k ohms at +10 °C	16k ohms at -20 °C 10k ohms at +10 °C	17k ohms at -20 °C 10k ohms at +10 °C	18k ohms at -20 °C 10k ohms at +10 °C
Temperature control range	- 20 °C to 10 °C			
Control fuse	Mini Circuit Breaker 6 A			
LED indicators	Yellow = Airflow fault Red = Heat ON			
Mounting holes	Depends on duct size			
Maximum ambient adjacent to terminal box	30°C (during operation)			
Auto high temperature cutout	75°C Pre-set			
Manual reset high temperature cutout	120°C Pre-set			
Width (mm)	470	620	720	920
Depth (mm)	370	370	370	370
Height (mm)	193	243	343	443

Modular T Smart

Top connected Air Handling Unit

Highlights

- › Duct connections are located at the top, reducing the unit's footprint
- › Low power consumption and low SFP (Specific Fan Power) for a very efficient unit operation
- › Superior IAQ level: up to three stage filtration on supply side (more than the 90% of PM1 is removed from outdoor air)
- › Plug&Play control solution, for a quick and easy start-up
- › Very compact unit, starting from 550 mm width, for an air flow up to 1,100 m³/h
- › DX coil integration for a unique Daikin fresh air package available for connection to VRV or ERQ

IAQ matters

An excellent IAQ improves people's performance and well-being, and decreases risk factors for various diseases. Modular T satisfies the ventilation and filtration needs of the indoor environment, guaranteeing an outstanding level of IAQ.

The future of ventilation

The Modular T, with its unique features, represents the latest product developed by Daikin for fresh air treatment and not only. Thanks to its optimized design, it can be easily transported and installed into new projects or existing buildings.



ATB-S

More details and final information can be found by scanning or clicking the QR codes.



ATB

Technical details

MODULAR T Pro & Smart		Size (1)	03	04	05	06	07
Airflow		m ³ /h	800	1,650	2,300	2,700	3,900
HE Thermal efficiency (2)		%	89.3	88.3	85.1	85.5	90.8
External static pressure		Pa	100				
Current		A	1.70	3.39	4.61	5.17	7.87
Power input		kW	0.39	0.78	1.06	1.19	1.81
SFPv (2)		kW/m ³ /s	1.47	1.5	1.49	1.41	1.5
Electrical supply	Phase (ph)		1				
	Frequency (Hz)		50/60				
	Voltage (V)		220/240 Vac				
Main unit Dimensions	Width (mm)		550		790		890
	Height (3) (mm)		1,600		1,900	1,850	2,050
	Length (mm)		1,580	1,650	2,170 (4)	2,620 (5)	2,950 (5)
Circular duct flange	Diameter (mm)		255	315	355	400	500
Unit sound power level		dBA	57	52	55		58
Unit sound pressure level (6)		dBA	50	45	48		51
Weight unit		Kg	200	250	400	500	620

(1) All size available in Smart or Pro version and right or left handing | (2) Outdoor condition: -5°C, 90% Indoor condition: 25°C, 50% | (3) Including feet and duct connections |


(4) Size 05 is provided in two sections | (5) Size 06 and 07 are provided in three sections | (6) Simple source reference value at 1 meter, directivity factor Q=4 (quarter sphere) and non-reverberant field. Allowances on declared values: +/- 3dB

Air flow range

Modular T is available in 5 sizes covering a wide range of applications such as hotels, offices, schools, gyms and light commercial buildings.

Sectioning

To ensure an easy and quick installation Modular T size 05 will be provided in two sections, while size 06 and 07 in three sections to pass smoothly through standard doors¹.

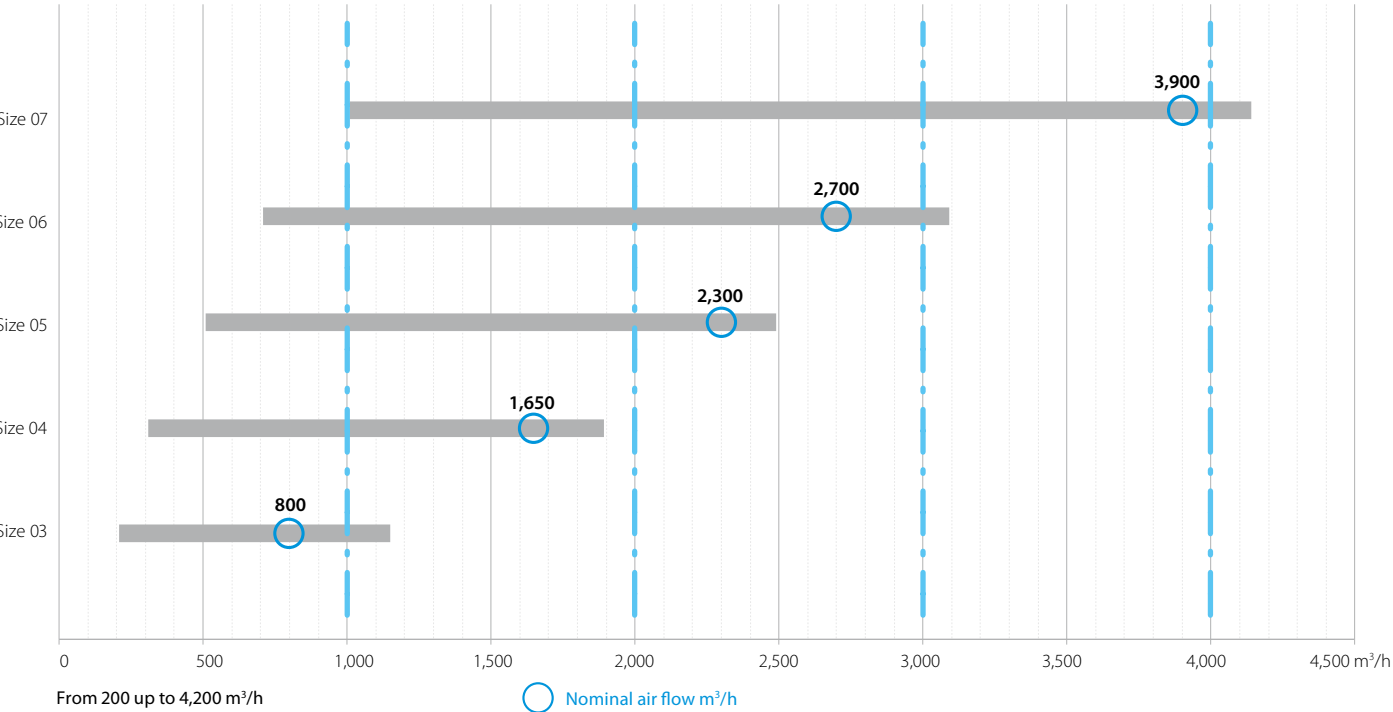

1. Please refer to technical data table at page 6 for more details



Marketing tools



- › Watch the explanation of VAM range, its USPs from our Indoor Air Quality Seminar www.youtube.com/daikineurope
- › Watch the Modular L promotional video on www.youtube.com/daikineurope
- › Watch the Modular T promotional video: www.youtube.com/daikineurope
- › Download our brochure on Commercial Ventilation from my.daikin.eu
- › Get access to our selection tool bim.daikin.eu to find your ventilation unit in a few click.
- › Download our app or refer to the selection tool above.



- › Consult the “Argue Card” document to support in promoting the Modular L range (*available on request*)

BIM models

- › Get the VAM, Modular L and T BIM tools on bim.daikin.eu

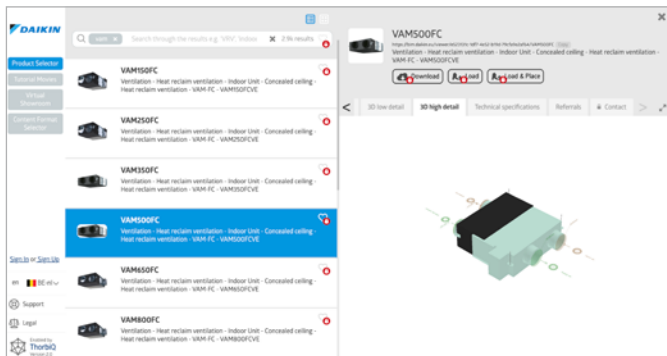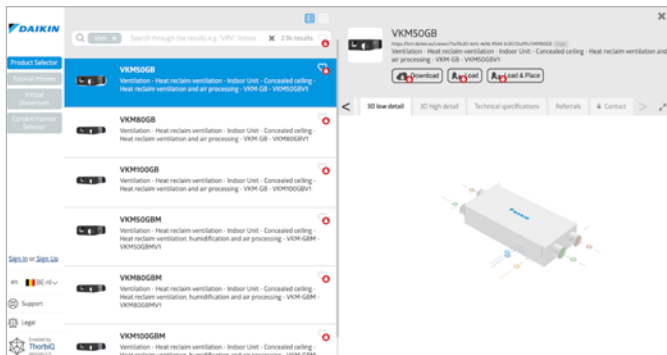

Benefits for the installer

Plug and play design

- › Pre-programmed and factory-tested controls for an easier and fast commissioning
- › Lightweight, low height and small footprint units
- › Easy access for servicing

Benefits for the consultant

Quick selection tool

- › In-house developed web software with improved user interface and preset parameters ensure that you can always find the optimum and most energy efficient product for your application
- › Interconnection with other product groups (e.g. automatic introduction of ventilation selection into a VRV Web Xpress selection)
- › Extremely flexible design

BIM models

- › BIM models are available and can be downloaded with just a few clicks

Benefits for the end user

Best comfort

- › Wide range of units to control fresh air and humidity
- › Wide range of optional filters to suit the application available up to ePM1 80% (F9)
- › Special paper heat exchanger recovers heat and moisture from extract air to warm up and humidify fresh air to comfortable levels (VAM, VKM)

Easy control and visualization

- › Wide and easy functionality with the use of Madoka remote controllers
- › Possibility to visualize the CO₂ concentration (with combination of VAM-J8 unit/BRYMA sensor/Madoka remote controller)

Supporting tools, software and apps


https://my.daikin.eu/denv/en_US/home/sales/ventilation-software.html

Web based selection tools dedicated to the Daikin ventilation portfolio

Ventilation Web Xpress


Selection tool for ventilation devices (VAM (+EKVDX) and VKM). The selection is based on given supply/extract airflows (including fresh up and given ESP of supply/extract ducting:

- › Easy calculation of fresh air per person or per area
- › Visualisation of psychrometric chart
- › Visualisation of selected configuration
- › Required field settings mentioned in the report

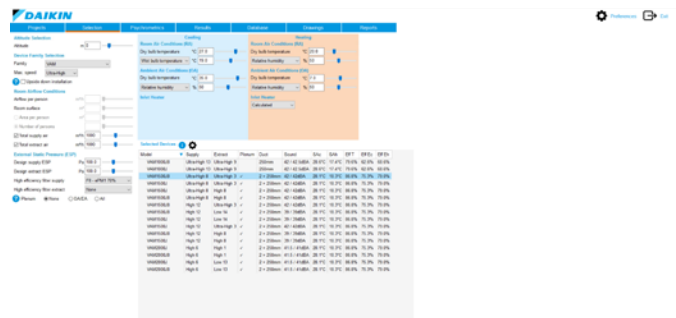




ASTRA Web

- › Quick Modular L/T selection that will save you precious time, drastically reducing selection time through the ASTRA software interface.
- › Very competitive solution available within the Wizard thanks to pre-uploaded parameters.
- › High selection quality, thanks to the intelligence embedded within the software core.

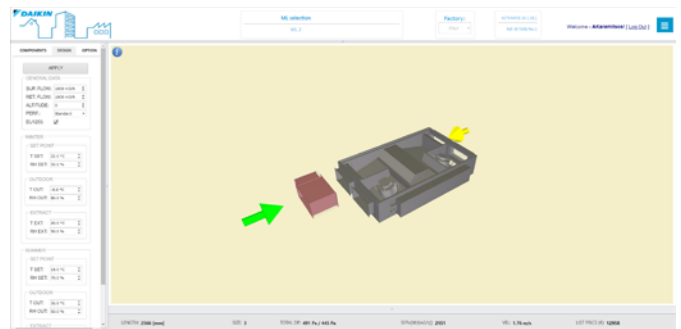

VRV Xpress integrates seamlessly with our ventilation selection software

- › The ventilation selection meant for a VRV project can be initiated directly from VRV Web Xpress.
- › The selected ventilation products -either on Ventilation Web Xpress or ASTRA- can be introduced into the VRV selection on VRV Web Xpress.
- › Integration of ventilation selection into 2D Floorplan.

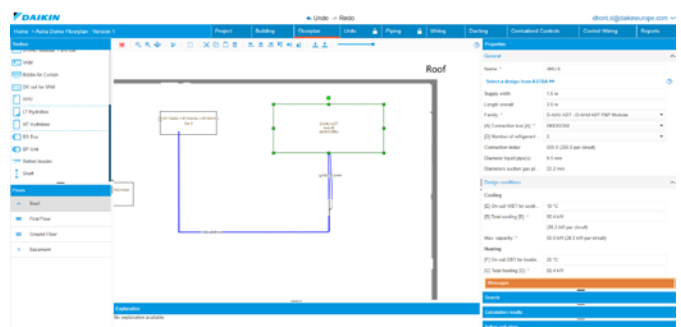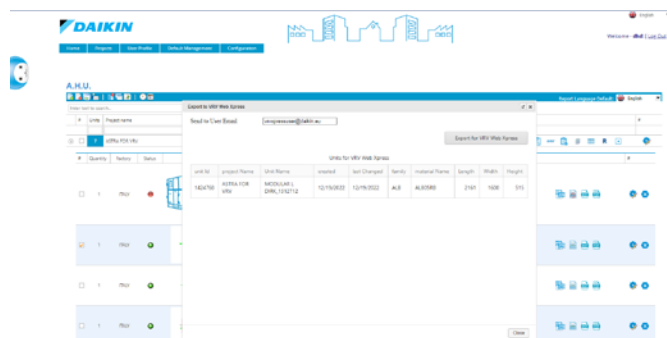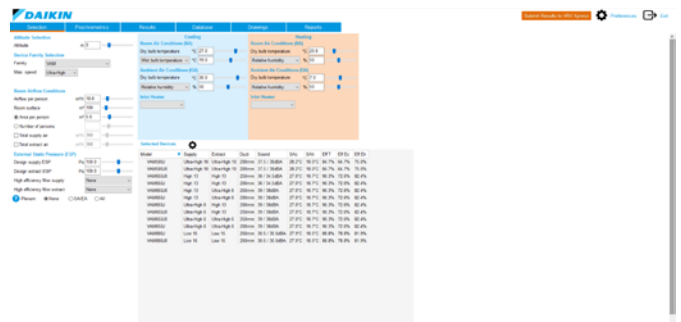

A photograph of a mechanical room featuring a long row of Daikin air handling units (AHUs). The units are light grey metal cabinets with black handles and latches. They are connected by a network of white and black pipes and ductwork. The room has a polished floor, exposed ceiling infrastructure with fluorescent lights, and a wall covered in silver insulation. A blue text box in the upper left corner contains the text 'Daikin air handling units'.

- › Maximum energy efficiency and indoor air quality
- › Wide range of functions and options
- › **High quality** components
- › **Innovative** technology: Unique features and state of the art technology for short payback
- › Operation **efficiency** and **energy savings**
- › Outstanding **reliability** and **performance**
- › Various applications are possible including air conditioning applications, industry-type process cooling, and large-scale district heat source systems
- › Plug and play concept for easy installation and commissioning
- › Unique Daikin fresh air package available for connection of AHU to VRV or FRO

- › Eurovent certified performances
- › Exceeding 2018 ErP – ECODSIGN requirements
- › Certified according to the Hygiene Directive VDI 6022 (Modular L and Professional ranges)
- › Certified according to the Hygiene Directive DIN 1946 (Professional range)
- › RLT certified performances

Panels

Gasket

Frame

IAQ

Plug & Play Controls





D-AHU MODULAR R

Pre configured unit with side connection and rotary heat exchanger (sensible or sorption)



D-AHU MODULAR P

Pre configured unit with side connection and aluminium counter flow plate heat exchanger



D-AHU PROFESSIONAL

Fully customize solution to meet all projects demand

For more information on Modular R/P and Professional
please refer to the Air Handling Unit section



Why use DX outdoor units with Air Handling Units?



High comfort levels

- › Rapid response of supply air temperature to changing loads, results in a steady indoor temperature
- › VRV offers the ultimate comfort thanks to continuous heating, also during defrost

Low carbon footprint and operating costs

- › DX heat pumps are highly efficient inverter units using a lower GWP refrigerant
- › By integrating a VRV heat recovery system, excess heat from rooms in cooling can be reused to heat up incoming fresh air


Easy design, all components integrated

- › A DX system is an all-in-one system, no boilers, tanks or pumps are needed reducing the total investment cost

One-stop shop, Daikin's fresh air package

- › A plug & play package with a Daikin DX outdoor unit and Daikin Air Handling Unit
- › One point of contact for the design, installation and commissioning, streamlining the process

Total solution operation example

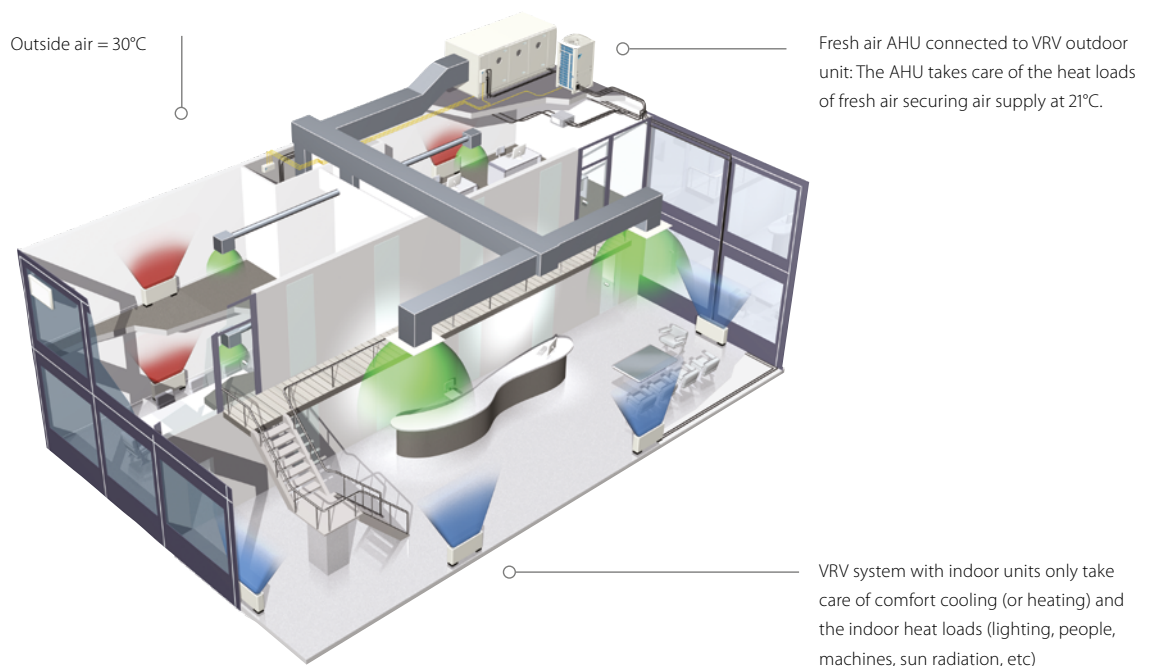

Daikin Air Handling Unit kits for connection to DX outdoor units

R-32

NEW Expansion valve kits

- 3 new capacities (300,350,400) offer a complete range of expansion valve kits from 5 to 69.3kW
- Improved flexibility thanks to combination ratio from 65% up to 110%
- Unified range connectable both to R-32 and R-410A systems
- Can be used in the most extreme outdoor conditions, down to -20°C
- Fully compliant to IEC60335-2-40, thanks to Shirudo Technology

5.0 kW ← → 69.3 kW

← →
-20°CWB 52°CDB

NEW Control box

- Complete offer of 5 control possibilities
 - Daikin integrated or third-party controller
 - Control of return air or fresh air supply temperature
- All control methods unified in one box
- Hinged door for easy servicing



Unified control box

Expansion valve set (EKEXVA*)

- Controls the refrigerant flow in the AHU DX coil
- Fully brazed and wired in case of a Daikin AHU

Control box (EKEACB)

- Controls the expansion valve set and outdoor unit(s) capacity
- Mounted and wired in case of a Daikin AHU

Specifications

EKEA – Expansion valve kit

Ventilation			EKEXVA	50	63	80	100	120	140	200	250	300	350	400	450	500
Dimensions	Unit	mm		404x217x80.5												
Weight	Unit	kg		2.9												
Operation range	On coil temperature	Heating Min.	°CDB	10.0												
		Cooling Max.	°CDB	35.0												
Ambient installation conditions	Min.		°CDB	-20.0												
	Max		°CDB	52.0												
Sound pressure level	Cooling	Nom.	dBa	36.5	37.5	38.6	39.5	40.5	41.1	42.5	43.5	44.3	45.1	45.6	46.1	46.5
	Nom.		dBa	24.8	25.8	26.8	27.8	28.8	29.4	30.8	31.8	32.5	33.3	33.8	34.3	34.8
Refrigerant	Type / GWP			R-32 / 675							R-410A / 2,087.5					
Piping connections	Liquid	Type	mm	Braze connection (only liquid line connected)												
	OD	mm														
				6.35			9.52				12.7					

EKEACB – Control box

				EKEACB	
Layout				Pair	Multi Mix
Dimensions	Unit	mm		300x400x150	
Weight	Unit	kg		5.1	
Ambient installation conditions	Min		°CDB	-20	
	Max		°CDB	52	
Power supply	Phase			1~	
	Frequency		Hz	50/60	
	Voltage		V	220-240/220	

Click more information on [EKEA](#) or [EKEXVA](#) outdoor units


Air Handling Unit kits - Control possibilities

Every application is different.

Is there a constant load or not, how to control your temperature and which controls are available?

With our complete offering of 5 control possibilities, anything is possible.


Flow chart to select your control type

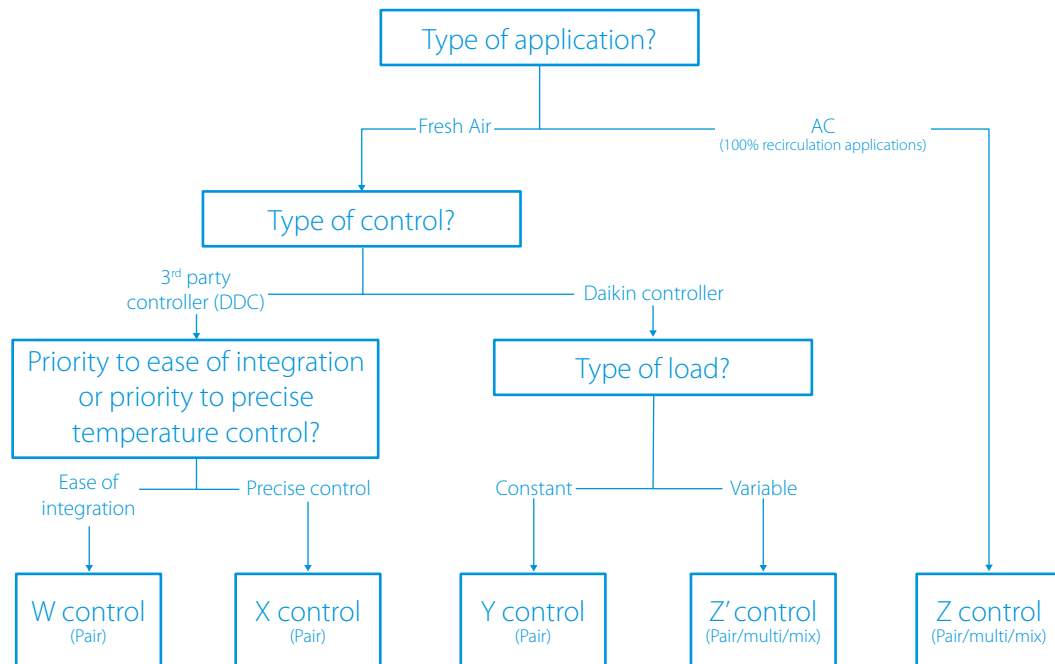

Control type benefits	Sensor Used	Controller
W control – control of supply or return air temperature › Responds to load variation (capacity is changed as a function of measured temperature, but slower than X- control) › Air temperature control › Easy to integrate, as no additional programming is needed for most standard AHU controllers	Td, Ts/f or Tr (field supplied)	External controller (DDC) using a proportional 0~10 V signal for capacity control (5 steps)
X control – control of supply or return air temperature › Fastest response to load variation (capacity is immediately changed as a function of measured temperature) › Precise air temperature control › Ideal for comfort sensitive applications. This is also used by default in Daikin AHU controls	Td, Ts/f or Tr (field supplied)	External controller (DDC) using a proportional 0~10 V signal for capacity control (Stepless)
Y control – control of evaporating/condensing temperature › Cost effective and simple solution, no additional DDC controller required › Fixed evaporating/condensing temperature, no direct temperature control › Ideal for applications with a constant cooling/heating load	R2T/R3T (Daikin supplied)	3rd party thermostat (Daikin controller for field settings)



Sensors used

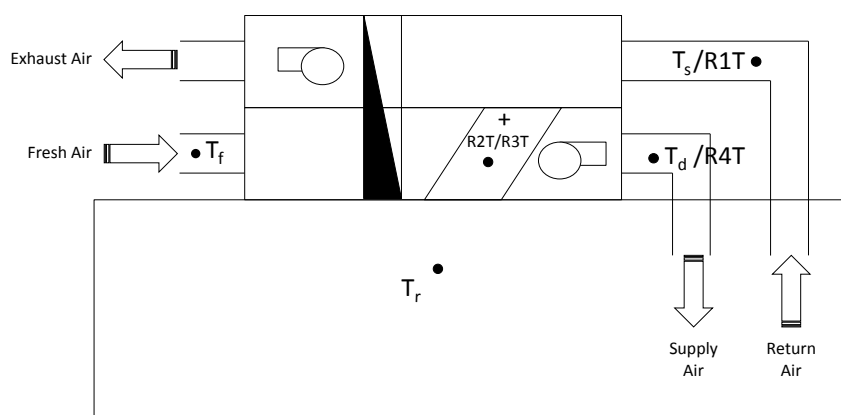

Legend

- T_d : discharge (supply) air temperature
- T_s : suction (return) air temperature
- T_f : fresh air temperature
- T_r : room air temperature
- R2T/R3T: Refrigerant (liquid/gas line) temperature

Control type benefits	Sensor Used	Controller
Z' control – control of supply air temperature › Cost efficient and simple solution, no additional DDC controller required › You can combine VRV indoor units and AHUs in one system or connect several AHUs to 1 outdoor unit › Ideal for pre-conditioning of fresh air via T_d temperature control › Less accurate room temperature control compared to X/W/Z control	R4T (Daikin supplied)	Daikin controller (set point can be set via field setting)
Z control – return air temperature control › Cost efficient and simple solution, no additional DDC controller required › You can combine VRV indoor units and AHUs in one system or connect several AHUs to 1 outdoor unit › Ideal for AHU's that operate at 100% recirculation like indoor units or if no particular supply temperature required › No supply temperature control	R1T (Daikin supplied)	Daikin controller (set point can be set via remocon or via C1C2)

Air Handling Unit kits – Layout possibilities

With our wide capacity range and different control options, a variety of layout possibilities to match your application:

- › **Pair layout:** one or more outdoor units combined with 1 air handling unit
- › **Multi layout:** one outdoor unit combined with multiple air handling units
- › **Mix layout:** one outdoor unit combined with an air handling unit AND indoor units

Pair layout


One ERQ or VRV heat pump (system) connected to one AHU through one refrigerant circuit

- › with W, X, Y, Z, Z' control
- › not allowed for VRV H/R




One VRV heat pump (system) connected to the interlaced coil of one AHU through several refrigerant circuits

- › with W, X, Y control
- › not allowed for VRV H/R and VRV-i

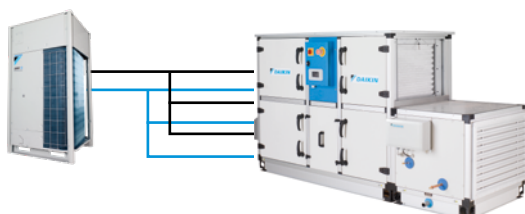

Several ERQ or VRV heat pumps connected to the interlaced coil of one AHU through several refrigerant circuits


- › with W, X, Y control
- › not allowed for VRV H/R and VRV-i

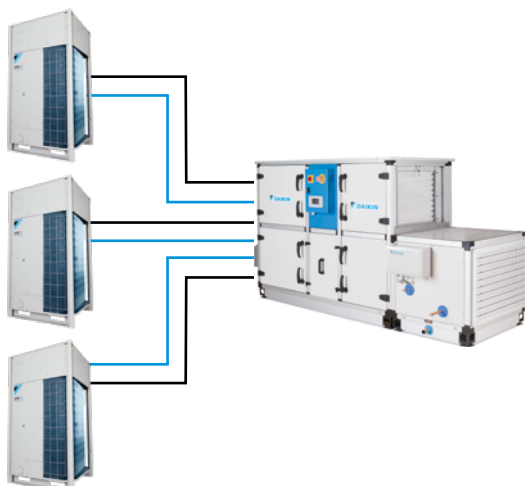

Multi layout

One VRV heat pump connected to several AHUs



- › with Z, Z' control and field supplied controls on AHU side.
- › not allowed for VRV H/R
- › no interlaced coil possible

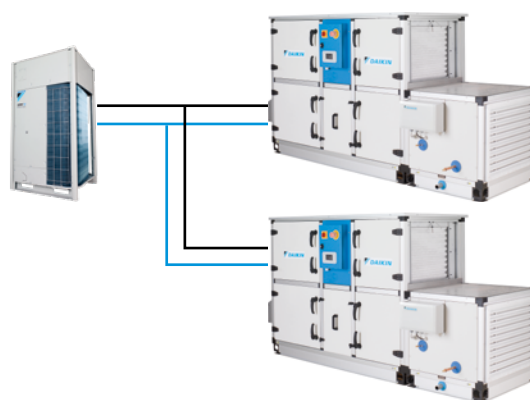

Mix layout


VRV indoor units and AHU(s) mixed in the same VRV heat pump or heat recovery system

- › with Z, Z' control and field supplied controls on AHU side
- › no interlaced coil possible
- › hydrobox not possible

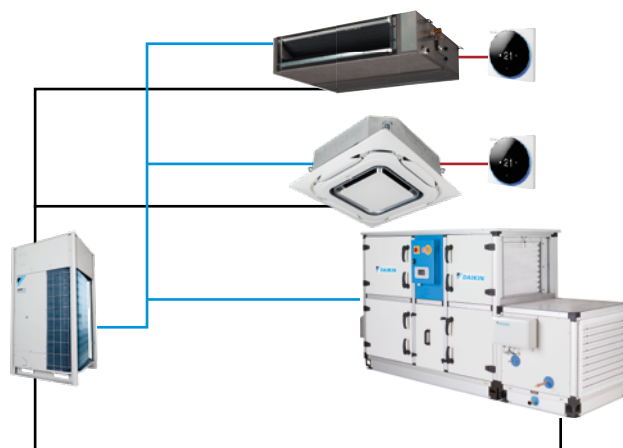



Main components with detailed piping and wiring principle

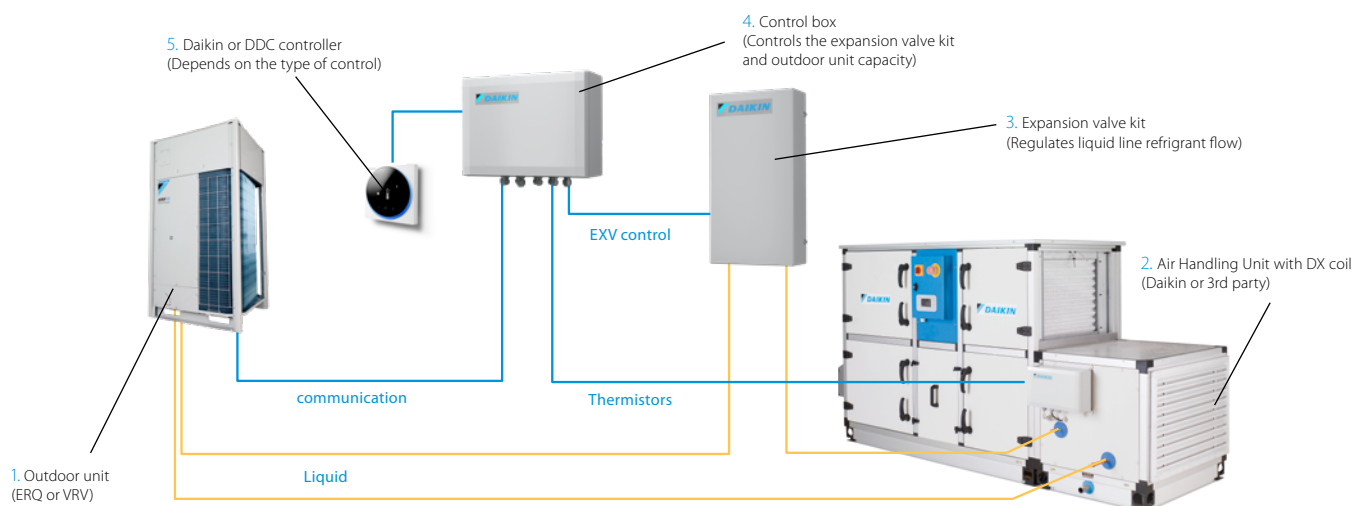

Detailed combination table

Range	Outdoor Unit	Control box EKEACBVE	Expansion valve kits EKEXVA***												
			50	63	80	100	125	140	200	250	300	350	400	450	500
ERQ	ERQ100A7V1B	P	-	P	P	P	P	-	-	-	-	-	-	-	-
	ERQ125A7V1B	P	-	P	P	P	P	P	-	-	-	-	-	-	-
	ERQ140A7V1B	P	-	-	P	P	P	P	-	-	-	-	-	-	-
	ERQ125A7W1B	P	-	P	P	P	P	P	-	-	-	-	-	-	-
	ERQ200A7W1B	P	-	-	-	P	P	P	P	P	-	-	-	-	-
	ERQ250A7W1B	P	-	-	-	-	P	P	P	P	P	-	-	-	-
VRV IV & VRV IV+	H/P (RYYQ, RXYQ, RXYSQ, RXYTQ, RXYLQ, RXYSC), RWEYQ (H/P))	P/M	Pair and multi: 65% ⁽¹⁾ < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												
	VRV-i (RKXYQ)	P ⁽²⁾ /M	Pair and multi: 65% ⁽¹⁾ < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												
	H/R (REYQ, RWEYQ (H/R))	M ⁽³⁾	Multi ⁽³⁾ : 65% ⁽¹⁾ < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												
VRV 5	H/P (RXYSA, RXYA)	P/M	Pair and multi: 65% ⁽¹⁾ < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												
	H/R REYA	M ⁽³⁾	Multi ⁽³⁾ : 65% ⁽¹⁾ < CR < 110% Mix: CR < 110% and 50% < IU CR < 110%												

P: Pair layout - One or more outdoor units connected to an (interlaced) coil of one AHU.

M: Mix or multi layout - Combination of (multiple) AHU(s) with (mix combination) or without (multi combination) VRV DX indoor(s). Only Z or Z' control possible (no interlaced coils).

(1): For 65% < CR < 75% please refer to the specifically required coil size

(2): Only Z or Z' control possible (no interlaced coils)

(3): Technically is possible to connect H/R in pair combination, but there's no benefit to do it



Daikin Fresh Air package

What is included?

- › A plug & play package with a Daikin DX outdoor unit and Daikin Air Handling Unit
- › Factory fitted and welded DX coil, expansion valve kit and control box
- › One point of contact



VRV or ERQ outdoor condensing unit



Daikin Air Handling Unit



Factory fitted and welded DX coil, expansion valve kit and control box

Simplified business

- › Unique total solution approach of heating, cooling and ventilation
- › Off-the-shelf compatibility between Daikin outdoor unit and Daikin AHU
- › Plug&play control for outstanding reliability
- › **Peace-of-mind thanks to a single point of contact**


Simple selection in 2-steps

STEP 1



Select your design in ASTRA software

STEP 2



Add the AHU design in Xpress (including capacity, dimensions, refrigerant connection location,...)

Share with Xpress

Complete range of possibilities



750 m³/h up to 144,000 m³/h

D-AHU Professional

- › Infinite variable sizes
- › Tailored to the individual customer



500 m³/h up to 25,000 m³/h

D-AHU Modular R

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › Heat recovery wheel (sorption and sensible technology)
- › Compact design



500 m³/h up to 25,000 m³/h

D-AHU Modular P

- › Pre-configured sizes
- › Plug and play concept
- › EC Fan technology
- › High efficiency aluminium counter flow PHE
- › Compact design

Integration with 3rd party Air Handling Units

Also for the integration with 3rd party AHU's Daikin provides expert support for the design and installation.

Selection of the expansion valve kit – Fresh air application

- › Define the required heating/cooling load of your project
- › Define 3rd party AHU heat exchanger capacity
- › Use the Xpress selection software or the below table to select the correct expansion valve kit
- › The 3rd party AHU design should respect the allowed heat exchanger volume
- › Xpress selection software will select the correct outdoor unit at the design ambient temperatures.

Cooling

EKEXVA Class	Allowed heat exchanger capacity (kW)			Allowed heat exchanger volume (dm ³)		
	Minimum	Nominal	Maximum	Minimum		Maximum
				General Limits	(65%<CR<75%) Only for pair and multi layout	
50	5.0	5.6	6.2	0.95	1.09	1.65
63	6.3	7.1	7.8	1.02	1.18	2.08
80	7.9	9.0	9.9	1.42	1.64	2.64
100	10.0	11.2	12.3	1.51	1.74	3.30
125	12.4	14.0	15.4	1.98	2.29	4.12
140	15.5	16.0	17.6	2.54	2.94	4.62
200	17.7	22.4	24.6	3.02	3.49	6.60
250	24.7	28.0	30.8	3.97	4.58	8.25
NEW 300	30.9	33.5	36.9	4.53	5.25	9.9
NEW 350	37.0	40.0	44.0	5.48	6.32	11.55
400	44.1	45.0	49.5	6.04	6.97	13.2
NEW 450	49.6	50.4	55.4	6.99	8.07	14.5
500	55.5	56.0	61.6	7.55	8.72	16.5

Saturated evaporating temperature: +6°C
Air temperature: +27°C DB / +19°C WB

Heating

EKEXVA Class	Allowed heat exchanger capacity (kW)			Allowed heat exchanger volume (dm ³)		
	Minimum	Nominal	Maximum	Minimum		Maximum
				General Limits	(65%<CR<75%) Only for pair and multi layout	
50	5.6	6.3	7.0	0.95	1.09	1.65
63	7.1	8.0	8.8	1.02	1.18	2.08
80	8.9	10.0	11.1	1.42	1.64	2.64
100	11.2	12.5	13.8	1.51	1.74	3.30
125	13.9	16.0	17.3	1.98	2.29	4.12
140	17.4	18.0	19.8	2.54	2.94	4.62
200	19.9	25.0	27.7	3.02	3.49	6.60
250	27.8	31.5	34.7	3.97	4.58	8.25
NEW 300	34.8	37.5	41.5	4.53	5.25	9.9
NEW 350	41.6	45.0	49.5	5.48	6.32	11.55
400	49.6	50.0	55.7	6.04	6.97	13.2
NEW 450	55.8	56.5	62.4	6.99	8.07	14.85
500	62.5	63.0	69.3	7.55	8.72	16.5

Saturated evaporating temperature: +46°C
Air temperature: +20°C DB

Selection of the expansion valve kit – Recirculation application

- › Define the required heating/cooling load of your project
- › Use the Xpress selection software or the below table to select the correct expansion valve, following the procedure used as for standard VRV indoor units
- › The 3rd party AHU design should respect the allowed heat exchanger volume
- › Xpress selection software will select the correct outdoor unit at the design ambient temperatures

Cooling

EKEXVA Class	On-coil air temperature [°C]						
	14WB 20DB	16WB 23DB	18WB 26DB	19WB 27DB	20WB 28DB	22WB 30DB	24WB 32DB
	kW	kW	kW	kW	kW	kW	kW
50	3.8	4.5	5.2	5.6	5.9	6.0	6.2
63	4.8	5.7	6.6	7.1	7.5	7.7	7.8
80	6.1	7.2	8.4	9.0	9.5	9.7	9.9
100	7.6	9.0	10.5	11.2	11.8	12.1	12.3
125	9.5	11.3	13.1	14.0	14.8	15.1	15.4
140	10.8	12.9	15.0	16.0	16.9	17.3	17.6
200	15.1	18.0	21.0	22.4	23.6	24.2	24.6
250	18.9	22.5	26.2	28.0	29.5	30.2	30.8
NEW 300	22.6	26.9	31.3	33.5	35.3	36.1	36.9
NEW 350	27.0	32.2	37.4	40.0	42.1	43.1	44.0
400	30.4	36.2	42.1	45.0	47.4	48.5	49.5
NEW 450	34.0	40.5	47.2	50.4	53.1	54.3	55.4
500	37.8	45.0	52.4	56.0	59.0	60.4	61.6

Heating

EKEXVA Class	On-coil air temperature [°C]						
	10.0	16.0	18.0	20.0	21.0	22.0	24.0
	kW	kW	kW	kW	kW	kW	kW
50	6.6	6.6	6.6	6.3	6.1	5.9	5.5
63	8.4	8.4	8.4	8.0	7.7	7.5	7.0
80	10.5	10.5	10.5	10.0	9.7	9.4	8.7
100	13.1	13.1	13.1	12.5	12.1	11.7	10.9
125	16.8	16.8	16.8	16.0	15.5	15.0	13.9
140	18.9	18.9	18.9	18.0	17.4	16.8	15.7
200	26.2	26.2	26.2	25.0	24.2	23.4	21.8
250	33.1	33.1	33.1	31.5	30.5	29.5	27.5
NEW 300	39.4	39.4	39.4	37.5	36.3	35.1	32.7
NEW 350	47.2	47.2	47.2	45.0	43.6	42.1	39.2
400	52.4	52.4	52.4	50.0	48.4	46.8	43.6
NEW 450	59.2	59.2	59.2	56.5	54.7	52.9	49.3
500	66.0	66.0	66.0	63.0	61.0	59.0	54.9



Astropure 2000, Air Purifier for Commercial Applications

Plug & play, mobile recirculation unit with high efficiency filtration – for better indoor air quality in commercial spaces

- › For areas where additional, extra high, filtration performance is needed.
- › Airflow rate up to 2,000 m³/h
- › HEPA H14 filter in accordance with EN1822
- › Pre-filter options up to ISO Coarse 70%
- › Insulated double-wall construction provides whisper-quiet operation down to 35 dB(A)
- › Easy installation, operation, and maintenance in a totally self-contained system
- › For commercial areas up to 200m²



Models

Model	BR00000554	BR00000749	BR00000676	BR00000751
Plug type	EU	UK	EU	UK
HEPA Filter (H14)		✓		✓
LCD Screen				✓
Activ. Carbon (Gas phase) pre-filter				✓

Applications



Schools and Universities



Commercial Buildings



Healthcare



Hospitality



Shops and Shopping malls

Providing high-efficiency 2-stage filtration

Standard prefilter

All units are delivered with a prefilter, increasing filter life and protecting the installed HEPA filter

RedPleat - 4531002424

- › Delivered with BR00000554/749
- › ISO 16890: ISO coarse 70%
- › Available with Antimicrobial treated media (RedPleat ULTRA)



RedPleat Carb - 4139002424

- › Delivered with BR00000676/751
- › ISO 16890: ISO coarse 65%
- › Effectively removes offensive odors



Main filter

The HEPA filter features eFRM filtration media which combines ultra-high efficiency and particulate loading to remove 99.99% of dust, pollen, mold, bacteria, viruses, and any airborne particle with a size of 0.3 microns or greater.

AstroCel III - 1493299990

- › H14 filtration efficiency according EN 1822
- › V-shaped filter configuration, combined with microglass media, delivers higher flow and the lowest possible pressure drop vs traditional box style HEPA filters
- › Compatible with Discrete Particle Counter (DPC) and photometric test methods as access and instrumentation allow



Astropure 2000, Air Purifier for Commercial Applications

Plug & play, mobile recirculation unit with high efficiency filtration – for better indoor air quality in commercial spaces

- › Airflow rate up to 2,000 m³/h
- › HEPA H14 filter in accordance with EN1822
- › Optional touch sensitive LCD Display (BR00000676/751)
- › Insulated double-wall construction provides whisper-quiet operation
- › Activated carbon filter
- › Sliding tray design provides easy access and servicing of filters
- › Designed with internal variable fan speed (electronically commutated) to meet specific application requirements
- › Suitable for in-room use or sheltered outdoor installation
- › CE-compliance, VDI 6022 guided design



More details and final information can be found by scanning or clicking the QR codes.



BR00000554



BR00000676

Ventilation				BR00000554	BR00000749	BR00000676	BR00000751
Features	Plug type			EU	UK	EU	UK
	HEPA Filter (H14)			✓		✓	
	LCD Screen					✓	
	Activ. Carbon (Gas phase) pre-filter					✓	
Design air flow rate			m³/h	2,000			
Application				Floor standing type			
Casing	Colour			Painted galvanized steel finish			
Dimensions	Unit	HxWxD	mm	1,628x720x770			
Weight	Unit			kg			
Pre-filter	Dust collecting method			Prefilter RedPleat, ISO Coarse 70%		Prefilter RedPleat Carb, ISO Coarse 65% gas phase filter	
HEPA filter	Bacteria filtering method			Astrocel III HEPA H14			
Air purifying operation	Power input	High fan speed	kW	0.379			
Sound pressure level	Air purifying operation	High fan speed	dBA	55.9			
Fan Motor				Stepless adjustable			
Safety devices	Item			Safety switch (operation stops when the back door is open)			
Standard Accessories	Prefilter			1			
	HEPA filter			1			
	Quick Start and Maintenance Guide			1			
	Installation and Operation Manual			1 (download)			
Power cord			m	3			
Power supply	Phase			1~			
	Frequency			Hz			
	Voltage			V			
Running current	Air purifying operation	High fan speed	A	1.73			

Options - Ventilation

		Energy recovery ventilation - VAM								
		VAM 150FC9	VAM 250FC9	VAM 350J8	VAM 500J8	VAM 650J8	VAM 800J8	VAM 1000J8	VAM 1500J8	VAM 2000J8
Individual control systems	BRC301B61 VAM wired remote control	•	•	•	•	•	•	•	•	•
	Madoka BRC1H52W (White) / BRC1H52S (Silver) / BRC1H52K (Black) User-friendly wired remote controller with premium design	•	•	•	•	•	•	•	•	•
	BRC1E53A/B/C Wired remote control with full-text interface and back-light	•	•	•	•	•	•	•	•	•
	BRC1D52 Standard wired remote control with weekly timer	•	•	•	•	•	•	•	•	•
Centralised control systems	DCC601A51 intelligent Tablet Controller	•	•	•	•	•	•	•	•	•
	DCS601C51 intelligent Touch Controller	•	•	•	•	•	•	•	•	•
	DCS302C51 Central remote control	•	•	•	•	•	•	•	•	•
	DCS301B51 Unified ON/OFF control	•	•	•	•	•	•	•	•	•
Building Management System & Standard protocol interface	DCM601A51 intelligent Touch Manager	•	•	•	•	•	•	•	•	•
	DGE601A51 Edge adapter for connection to Daikin Cloud Plus	•	•	•	•	•	•	•	•	•
	DGE602A51 Edge lite adapter for connection to Daikin Cloud Plus	•	•	•	•	•	•	•	•	•
	EKMBDXB Modbus interface	•	•	•	•	•	•	•	•	•
	DMS502A51 BACnet Interface	•	•	•	•	•	•	•	•	•
	DMS504B51 LonWorks Interface	•	•	•	•	•	•	•	•	•
Filters	Coarse 55% (G4)									
	ePM10 75% (M5)									
	ePM10 70% (M6)			EKAFVJ50F6	EKAFVJ50F6	EKAFVJ65F6	EKAFVJ100F6	EKAFVJ100F6	EKAFVJ100F6 x2	EKAFVJ100F6 x2
	ePM1 50% (F7)									
	ePM1 60% (F7)			EKAFVJ50F7	EKAFVJ50F7	EKAFVJ65F7	EKAFVJ100F7	EKAFVJ100F7	EKAFVJ100F7 x2	EKAFVJ100F7 x2
	ePM _i 70% (F8)			EKAFVJ50F8	EKAFVJ50F8	EKAFVJ65F8	EKAFVJ100F8	EKAFVJ100F8	EKAFVJ100F8 x2	EKAFVJ100F8 x2
	ePM1 80% (F9)									
	High efficiency filter									
	Replacement air filter									
Mechanical accessories	Rail									
	Rectangular to round duct transition									
	Separate plenum								EKPLEN200 (5)	EKPLEN200 (5)
CO ₂ sensor				BRYMA65	BRYMA65	BRYMA65	BRYMA100	BRYMA100	BRYMA200	BRYMA200
Electrical heater for pre treatment of fresh air		GSIEKA10009	GSIEKA15018	GSIEKA20024	GSIEKA20024	GSIEKA25030	GSIEKA25030	GSIEKA25030	GSIEKA35530 (6)	
DX coil for post treatment of fresh air					EKVDX32A	EKVDX50A	EKVDX50A	EKVDX80A	EKVDX100A	EKVDX100A
Silencer (900mm depth)										
Electrical accessories	Wiring adapter for external monitoring/ control (controls 1 entire system)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)	KRP2A51 (2)
	Adapter PCB for humidifier									
	Adapter PCB for third party heater	BRP4A50A	BRP4A50A	BRP4A50A (4)	BRP4A50A (4)	BRP4A50A (3/4)	BRP4A50A (4)	BRP4A50A (4)	BRP4A50A (3/4)	BRP4A50A (3/4)
	External wired temperature sensor									
	Adapter PCB Mounting plate	EKMP25VAM	EKMP25VAM			EKMP65VAM			EKMPVAM	
	Installation box for adaptor PCB	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101	KRP1BA101

Notes

(1) Do not connect the system to DIII-net devices LONWorks interface, BACnet interface, ...; (Intelligent Touch Manager, EKMBDXA are allowed)

(2) Installation box needed

(3) Adapter PCB mounting plate needed, applicable model can be found in the table above

Energy recovery ventilation VKM			Air handling unit applications
VKM 50GBM	VKM 80GBM	VKM 100GBM	EKEACB (1)
•	•	•	•
•	•	•	
•	•	•	
•	•	•	
•	•	•	
•	•	•	
•	•	•	
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	•
•	•	•	
•	•	•	
•	•	•	
•	•	•	
KAF242H80M	KAF242H100M	KAF242H100M	
KAF241H80M	KAF241H100M	KAF241H100M	
BRYMA65	BRYMA100	BRYMA100	
GSIEKA20024 (7)	GSIEKA20024 (7)	GSIEKA20024 (7)	
BRP4A50A (4)	BRP4A50A (4)	BRP4A50A (4)	
BRP4A50A (4)	BRP4A50A (4)	BRP4A50A (4)	
BRP4A50A (4)	BRP4A50A (4)	BRP4A50A (4)	
			KRCS01-1

(4) 3rd party heater and 3rd party humidifier cannot be combined

(5) Contains 1 plenum and can be used for half side of the unit (up to 4 plenums can be used on 1 unit)

(6) Available only with optional plenum

(7) To be combined with option BRP4A50A using external 230VAC with local supplied circuit breaker (max. 3A)

Options - Ventilation

Accessories	Modular L Pro						Modular T Pro				
	ALB02LB ALB02RB	ALB03LB ALB03RB	ALB04LB ALB04RB	ALB05LB ALB05RB	ALB06LB ALB06RB	ALB07LB ALB07RB	ATB03RA ATB03LA	ATB04RA ATB04LA	ATB05RA ATB05LA	ATB06RA ATB06LA	ATB07RA ATB07LA
Iso Coarse 55% (G4) Filter	ALF02G4A	ALF03G4A	ALF05G4A		ALF07G4A		ATF03G4A	ATF04G4A	ATF05G4A	ATF06G4A	ATF07G4A
ePM10 75% (M5) Filter	ALF02M5A	ALF03M5A	ALF05M5A		ALF07M5A		ATF03M5A	ATF04M5A	ATF05M5A	ATF06M5A	ATF07M5A
ePM1 50% (F7) Filter	ALF02F7A	ALF03F7A	ALF05F7A		ALF07F7A		ATF03F7A	ATF04F7A	ATF05F7A	ATF06F7A	ATF07F7A
ePM1 80% (F9) Filter	ALF02F9A	ALF03F9A	ALF05F9A		ALF07F9A		ATF03F9A	ATF04F9A	ATF05F9A	ATF06F9A	ATF07F9A
Sound attenuator	ALS0290A	ALS0390A	ALS0590A		ALS0790A		ATS0360A	ATS0460A	ATS0560A	ATS0660A	ATS0760A
Rails for door	ALA02RLA	ALA03RLA	ALA05RLA		ALA07RLA						
Duct transition	ALA02RCA	ALA03RCA	ALA05RCA		ALA07RCA						
Mixing damper							ATA03MDA	ATA04MDA	ATA05MDA	ATA06MDA	ATA07MDA
External damper							ATA03EDA	ATA04EDA	ATA05EDA	ATA06EDA	ATA07EDA
Electric pre heater ¹	ALD02HEFA	ALD03HEFA	ALD05HEFA		ALD07HEFA		ATD03HEFAU	ATD04HEFAU	ATD05HEFAU	ATD06HEFAU	ATD07HEFAU
Electric post heater ¹	ALD02HESA	ALD03HESA	ALD05HESA		ALD07HESA		ATD03HESAU	ATD04HESAU	ATD05HESAU	ATD06HESAU	ATD07HESAU
DX coil ²							ATD03UDSAR	ATD04UDSAR	ATD05UDSAR	ATD06UDSAR	ATD07UDSAR
							ATD03UDSAL	ATD04UDSAL	ATD05UDSAL	ATD06UDSAL	ATD07UDSAL
WATER coil ²	ALD02CWSA	ALD03CWSA	ALD05CWSA		ALD07CWSA		ATD03UWSAR	ATD04UWSAR	ATD05UWSAR	ATD06UWSAR	ATD07UWSAR
							ATD03UWSAL	ATD04UWSAL	ATD05UWSAL	ATD06UWSAL	ATD07UWSAL
Water pre heating coil	ALD02HWUA	ALD03HWUA	ALD05HWUA		ALD07HWUA		ATD03HWFUAU	ATD04HWFUAU	ATD05HWFUAU	ATD06HWFUAU	ATD07HWFUAU
Water post heating coil ²	ALD02HWUA	ALD03HWUA	ALD05HWUA		ALD07HWUA		ATD03HWSAR	ATD04HWSAR	ATD05HWSAR	ATD06HWSAR	ATD07HWSAR
							ATD03HWSAL	ATD04HWSAL	ATD05HWSAL	ATD06HWSAL	ATD07HWSAL
Water valve 2 way cooling	ALV02CW2A	ALV03CW2A	ALV05CW2A		ALV07CW2A		ATV03CW2A	ATV04CW2A	ATV05CW2A	ATV06CW2A	ATV07CW2A
Water valve 2 way heating	ALV02HW2A	ALV03HW2A	ALV05HW2A		ALV07HW2A		ATV03HW2A	ATV04HW2A	ATV05HW2A	ATV06HW2A	ATV07HW2A
Water valve 3 way cooling	ALV02CW3A	ALV03CW3A	ALV05CW3A		ALV07CW3A		ATV03CW3A	ATV04CW3A	ATV05CW3A	ATV06CW3A	ATV07CW3A
Water valve 3 way heating	ALV02HW3A	ALV03HW3A	ALV05HW3A		ALV07HW3A		ATV03HW3A	ATV04HW3A	ATV05HW3A	ATV06HW3A	ATV07HW3A
Valve modulating actuator	ALE00AMVA						ATE00AMVA				
Damper modulating actuator							ATE00AMDA				
Digital PCB							ATE00DPUA				
Frost switch							ATE00FSUA				
CO ₂ sensor	ALP00COA										
Humidity sensor	ALP00HUA										
Temperature probe	ALP00TEA										
Room Interface	ALC00822A (POL 822)										
Commissioning module	ALC00895A (POL 895)										
Modbus RTU module	ALC00902A (POL 902)										
Bacnet IP module	ALC00908A (POL 908)										
LonWorks Interface											
Intelligent Touch Manager											
Intelligent Tablet Controller											
Intelligent Touch Controller											
Central remote control											
Unified ON/OFF control											

Notes

(1) For modular T pro only, both electric heater can be used as pre and post heater

(2) For modular T pro only, sixth digit on main unit material name has to be aligned with last digit of the coil material name

ATB0***RA** --> ATD00*UDS**A****R**
 ATB0***LA** --> ATD00*UDS**A****L**
 ATB0***RA** --> ATD00*UWS**A****R**
 ATB0***LA** --> ATD00*UWS**A****L**
 ATB0***RA** --> ATD00*HWS**A****R**
 ATB0***LA** --> ATD00*HWS**A****L**

(3) Please refer to the selection software for more details on accessories and their incompatibilities.

