


Streamer technology air purifier

MC80ZB



Flash Streamer

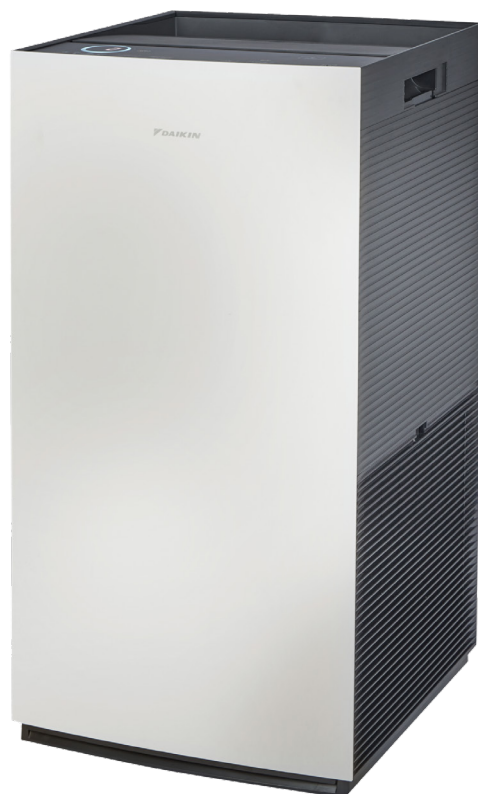

Onecta via app

Powerful air purification

- › Onecta app
- › Air purification for large spaces up to 124 m²
- › Daikin's Catch and Clean approach
- › Intuitive display design

- › High performance electrostatic HEPA filter
- › Filter lifetime of ten years
- › Whisper quiet

MC80ZB



Indoor Unit				MC80ZB	80ZB
Application					Floor standing type
Applicable room area				m²	62 (1) / 124 (2)
CADR				m³/h	480 (3)
Weight				Unit kg	9.8
Dimensions				Unit Height x Width x Depth mm	630 x 315 x 315
Casing				Colour	Front: White, Top/Side: Dark Grey
Fan				Type	Multi Blade Fan (Sirocco fan)
				Air flow rate Air purifying operation Silent/Low/Medium/Turbo m³/h	84 /132 /210 /480
Sound pressure level (4)				Air purifying operation Silent/Low/Medium/Turbo dBA	19 /25 /34 /55
Air purifying operation				Power input Silent/L/M/Turbo kW	0.009 /0.011 /0.016 /0.080
Deodorizing method					Twin streamer + Deodorizing catalyst
Dust collecting method					Electrostatic HEPA filter (5) (7)
Air filter				Type	Polyethylene terephthalate net
Sign				Item 01	PM 2.5 sensor lamp: 3 stages / Odour sensor lamp: 3 stages / / AIR MONITOR indicator: 0µg/m3 - 99µg/m3 (8) / 0 °C - 39 °C,20% - 90% / FAN lamps: Quiet/Low/Standard/Turbo / Econo mode / Anti-pollen mode / CIRCULATION mode / Child proof lock lamp / AIR MONITOR setting lamps / Streamer lamp / Daikin eye / AUTO FAN mode / Humidity monitor lamp: 5 stages / WIFI lamp
Power supply				Phase/Frequency/Voltage Hz/V	1~/50/60/220-240/220-230
Type					Air Purifier
Power supply				Plug Type	BF

(1) The coverage area is appropriate for operating the unit of maximum fan speed(HH). Coverage area indicates the space where a certain amount of dust particles can be removed in 30 minutes. |

(2) Converted to NRCC standards from test values in accordance with JEM1467. |

(3) Converted to CADR standards from test values in accordance with JEM1467. |

(4) Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) |

(5) Electrostatic HEPA filter is attached in the unit. |

(6)Other function: Active plasma ion function. Auto-restart function. |

(7) Requirements according to JEM1467. |

(8) "HI" is displayed when the PM2.5 concentration exceeds 99µg/m3.

