


Air Conditioning Technical Data

2MXF-A

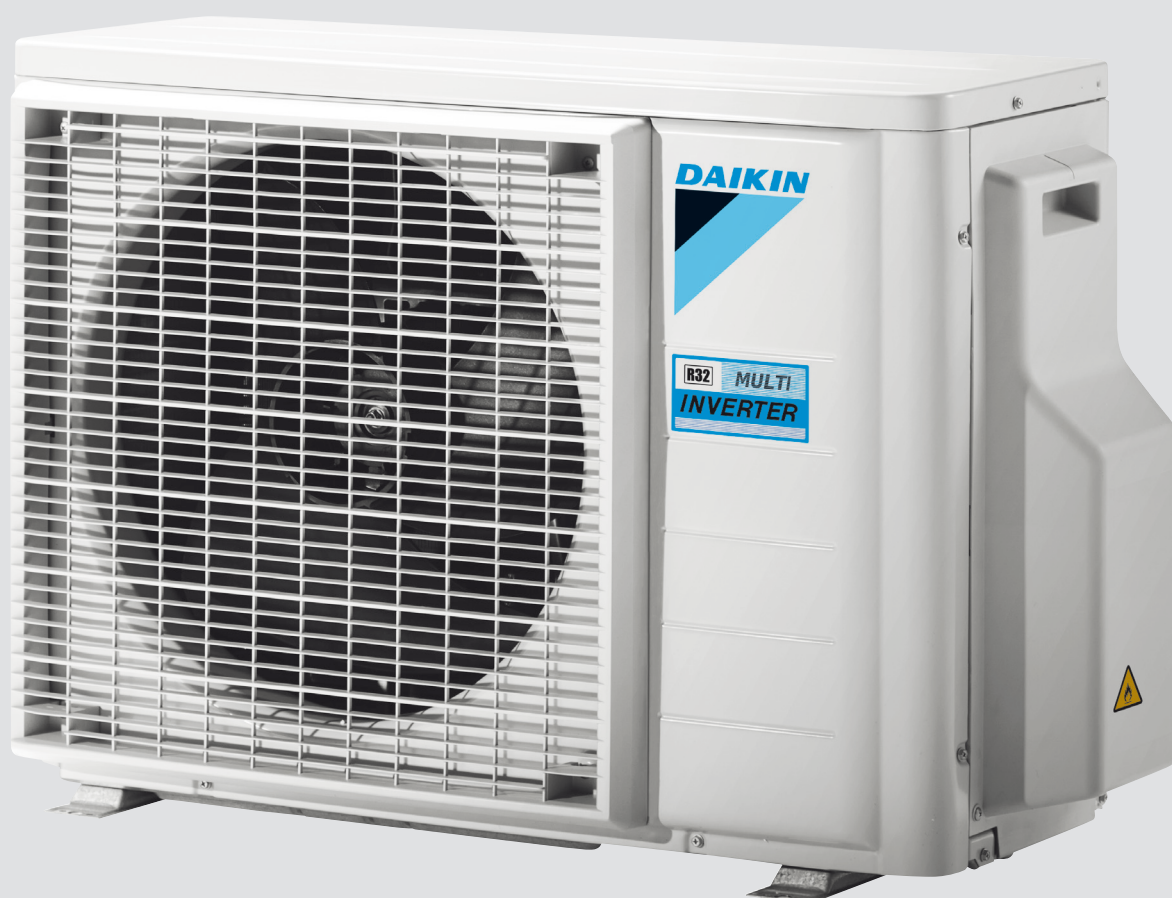

- > 2MXF40A2V1B
- > 2MXF50A2V1B


TABLE OF CONTENTS

2MXF-A

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	4
3	Electrical data	5
4	Combination table	6
5	Capacity tables	7
	Capacity Table Legend	7
	Cooling Capacity Tables	8
	Heating Capacity Tables	11
6	Dimensional drawings	12
7	Centre of gravity	13
8	Piping diagrams	14
9	Wiring diagrams	15
	Wiring Diagrams - Single Phase	15
10	Sound data	16
	Sound Pressure Spectrum	16
11	Operation range	17

1 Features

- Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- Up to 2 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency

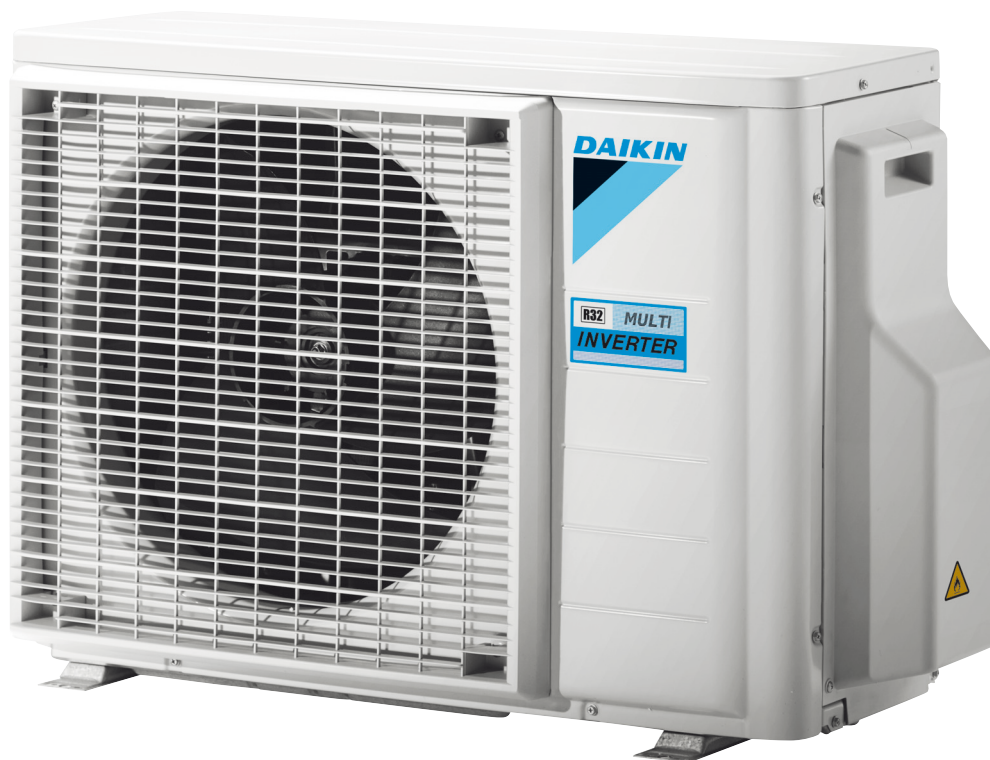

Inverter

2 Specifications

2-1 Technical Specifications					2MXF40A		2MXF50A	
Capacity control	Method				Variable (inverter)			
Casing	Colour				Ivory white			
Dimensions	Unit	Height	mm		550			
		Width	mm		765			
		Depth	mm		285			
	Packed unit	Height	mm		614			
		Width	mm		900			
		Depth	mm		357			
Weight	Unit		kg	36		41		
	Packed unit		kg	38		43		
Heat exchanger	Length		mm	805		810		
	Rows	Quantity			2			
	Fin pitch		mm	1.50				
	Stages	Quantity			24			
	Passes	Quantity			3.2			
	Tube type			7.0 Hi-XD		8.1 Hi-XA		
	Tube diameter		mm	7.0		8.1		
	Fin	Type			WF fin			
		Treatment			Anti-corrosion treatment			
	Compressor	Power input	Cooling	Nom.	W	970		1,246
Heating			Nom.	W	981		1,372	
Quantity				1				
Model				1YC25GXD#C		2YC40JXD#C		
Oil Amount		cm³		375		650		
Type				Hermetically sealed swing compressor				
Output		W		800		1,300		
Oil Type				FW68DA				
Fan	Type				Propeller fan			
	Discharge direction				Horizontal			
	Quantity				1			
	Air flow rate	Cooling	High	m³/min	36		37	
				cfm	1,271		1,306	
		Heating	High	m³/min	32		34	
				cfm	1,130		1,200	
Fan motor	Quantity				1			
	Model				LFD-280-23-8F			
	Output			W	50			
	Speed	Cooling	High	rpm	900		950	
				Super low	rpm			500
		Heating	High	rpm	820		890	
				Super low	rpm		320	
Sound power level	Cooling			dBA	60			
	Heating			dBA	62			
Sound pressure level	Cooling	High		dBA	46		48	
	Heating	High		dBA	48		50	
Operation range	Cooling	Ambient	Min.	°CDB	-10			
			Max.	°CDB	46			
	Heating	Ambient	Max.	°CDB	24			
Refrigerant	Type				R-32			
	Charge			kg	0.88		1.15	
				TCO ₂ eq	0.60		0.78	
	Control				Expansion valve			
GWP				675				

2 Specifications

2-1 Technical Specifications				2MXF40A	2MXF50A
Piping connections	Liquid	Quantity		2	
		Type		Flare connection	
		OD	mm	6.4	
	Gas	Quantity		2	1
		Type		Flare connection	
		OD	mm	9.5	
	Drain	Quantity		1	
		Type		Drain Joint	
		OD	mm	16 (inner diameter of connecting hose)	
	Gas 2	Quantity		-	1
		Type		-	Flare connection
		OD	mm	-	12.70
	Piping length	OU - IU	Min.	m	3 (1)
			Max.	m	20 (1)
		System	Chargel ess	m	20
		Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 20m)
Level difference	IU - OU	Max.	m	15.0	
	IU - IU	Max.	m	7.5	
Heat insulation				Both liquid and gas pipes	
Total piping length		System	Actual	m	30.0

Standard Accessories : Installation manual; Quantity : 1;

Standard Accessories : Screw bag; Quantity : 1;

Standard Accessories : Drain plug; Quantity : 1;

Standard Accessories : Reducer assembly; Quantity : 1;

2-2 Electrical Specifications					2MXF40A	2MXF50A
Power supply	Phase				1~	
	Frequency			Hz	50	
	Voltage			V	220-230-240	
Wiring connections	For power supply			Quantity	3	
				Remark	Earth wire included	
	For connection with indoor			Quantity	4	
				Remark	Earth wire included	

Notes

(1) For one room

See separate drawing for operation range

See separate drawing for electrical data

Contains fluorinated greenhouse gases

3 Electrical data

3 - 1 Electrical Data

2MXF-A

3

Outdoor unit	Power supply			RA indoor units (-10% safety factor) See note 5.		Other indoor units (-10% safety factor)		COMP		OFM	
	Hz	Voltage	Voltage range	MCA	MFA	MCA	MFA	RHz	RLA	kW	FLA
2MXM40M3V1B 2MXM40M4V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	9,80	16	9,80	16	-	5,1	0,040	0,17
	50	230							5,3		
	50	240							5,6		
2MXM50M2V1B9 2MXM50M3V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,94	16	13,27	16	-	5,9	0,042	0,18
	50	230							6,2		
	50	240							6,5		
2AMXM40M3V1B 2AMXM40M4V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	9,80	16	9,80	16	-	5,1	0,040	0,17
	50	230							5,3		
	50	240							5,6		
2AMXM50M3V1B 2AMXM50M4V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,94	16	13,27	16	-	5,9	0,042	0,18
	50	230							6,2		
	50	240							6,5		
2AMXF40A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	9,80	16	9,80	16	-	5,1	0,040	0,17
	50	230							5,3		
	50	240							5,6		
2AMXF50A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,83	16	12,83	16	-	5,9	0,042	0,18
	50	230							6,2		
	50	240							6,5		
2MXF40A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	9,80	16	9,80	16	-	5,1	0,040	0,17
	50	230							5,3		
	50	240							5,6		
2MXF50A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,83	16	12,83	16	-	5,9	0,042	0,18
	50	230							6,2		
	50	240							6,5		

Notes

- 1) The RLA is based on the following conditions.
Outdoor temperature :35°C DB
Indoor temperature :27°C DB / :19°C WB
- 2) Select the wire size according to the MCA.
- 3) The maximum allowable voltage that is unbalanced between phases is :2%.
- 4) Use a circuit breaker instead of a fuse.
- 5) Only for wall-mounted FVXM units

Symbols

- MCA: Minimum Circuit Ampere [A]
MFA: Maximum Fuse Ampere [A]
RLA: Rated load amps [A]
OFM: Outdoor fan motor
RHz: Rated operating frequency [Hz]
FLA: Full Load Ampere [A]
kW: Fan motor rated output [kW]

3D110207D

4 Combination table

4 - 1 Combination Table

2MXF40A

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room A	Room B	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
2MXF40A2V1B	2.0	2.00	---	1.30	2.00	2.40	0.33	0.44	0.57	1.78	2.38	3.09	79
	2.5	2.50	---	1.30	2.50	3.00	0.33	0.61	0.80	1.78	3.33	4.40	79
	3.5	3.50	---	1.30	3.50	4.00	0.33	1.04	1.35	1.78	5.71	7.38	79
	2.0+2.0	2.00	2.00	1.50	4.00	4.20	0.30	1.02	1.20	1.67	5.64	5.93	79
	2.0+2.5	1.78	2.22	1.50	4.00	4.30	0.30	1.01	1.20	1.67	5.57	6.02	79
	2.0+3.5	1.45	2.55	1.50	4.00	4.50	0.30	0.99	1.29	1.67	5.46	6.24	79
	2.5+2.5	2.00	2.00	1.50	4.00	4.40	0.30	1.00	1.25	1.67	5.51	6.13	79
	2.5+3.5	1.67	2.33	1.50	4.00	4.60	0.30	0.98	1.28	1.67	5.40	6.32	79

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room A	Room B	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
2MXF40A2V1B	2.0	3.00	---	1.00	3.00	3.70	0.26	0.83	1.26	1.43	4.52	6.89	79
	2.5	3.40	---	1.00	3.40	4.10	0.26	1.02	1.50	1.43	5.59	8.20	79
	3.5	3.80	---	1.00	3.80	4.40	0.26	1.28	1.73	1.43	7.35	9.51	79
	2.0+2.0	2.10	2.10	1.30	4.20	4.60	0.24	1.02	1.14	1.31	5.64	6.18	79
	2.0+2.5	1.87	2.33	1.30	4.20	4.70	0.24	1.01	1.16	1.31	5.59	6.26	79
	2.0+3.5	1.53	2.67	1.30	4.20	4.80	0.24	0.99	1.16	1.31	5.48	6.27	79
	2.5+2.5	2.10	2.10	1.30	4.20	4.70	0.24	1.00	1.14	1.31	5.53	6.19	79
	2.5+3.5	1.75	2.45	1.30	4.20	4.80	0.24	0.98	1.14	1.31	5.42	6.20	79

Notes

1. The total capacity of each connected indoor unit is up to -6.0 kW.
2. The values above are for connecting with the following indoor unit types:
-2.0, 2.5, 3.5- kW class
Wall-mounted -FTXF-A, FTXF-B- series
3. These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature -27°C DB / -19°C WB
Outdoor temperature -35°C DB
5. Heating capacity conditions
Indoor temperature -20°C DB
Outdoor temperature -7°C DB / -6°C WB

3D126692A

2MXF50A

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room A	Room B	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
2MXF50A2V1B	2.0	2.00	---	1.40	2.00	2.60	0.31	0.47	0.69	1.53	2.25	3.37	89
	2.5	2.50	---	1.40	2.50	3.10	0.31	0.67	0.92	1.53	3.27	4.50	89
	3.5	3.50	---	1.40	3.50	4.00	0.31	1.09	1.42	1.53	5.32	6.95	89
	2.0+2.0	2.00	2.00	1.80	4.00	5.00	0.43	1.12	1.48	1.64	5.48	6.85	89
	2.0+2.5	2.00	2.50	1.80	4.50	5.10	0.44	1.27	1.51	1.64	6.22	7.05	89
	2.0+3.5	1.82	3.18	1.80	5.00	5.40	0.46	1.47	1.72	1.64	7.20	7.78	89
	2.5+2.5	2.50	2.50	1.80	5.00	5.30	0.46	1.48	1.64	1.64	7.25	7.69	89
	2.5+3.5	2.08	2.92	1.80	5.00	5.40	0.46	1.47	1.65	1.64	7.16	7.74	89
	3.5+3.5	2.50	2.50	1.80	5.00	5.40	0.45	1.45	1.63	1.64	7.08	7.65	89

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room A	Room B	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
2MXF50A2V1B	2.0	3.00	---	1.10	3.00	3.70	0.27	0.82	1.13	1.33	3.99	5.52	89
	2.5	3.40	---	1.10	3.40	4.10	0.25	0.99	1.34	1.23	4.81	6.54	89
	3.5	4.00	---	1.10	4.00	4.60	0.25	1.24	1.53	1.23	6.03	7.46	89
	2.0+2.0	2.60	2.60	1.20	5.20	5.70	0.30	1.40	1.53	1.12	6.84	7.50	89
	2.0+2.5	2.49	3.11	1.20	5.60	5.90	0.30	1.50	1.55	1.12	7.34	7.61	89
	2.0+3.5	2.04	3.56	1.20	5.60	5.90	0.30	1.49	1.56	1.23	7.31	7.71	89
	2.5+2.5	2.80	2.80	1.20	5.60	5.80	0.30	1.51	1.55	1.12	7.38	7.65	89
	2.5+3.5	2.33	3.27	1.20	5.60	6.00	0.31	1.48	1.59	1.23	7.24	7.76	89
	3.5+3.5	2.80	2.80	1.30	5.60	6.10	0.33	1.47	1.61	1.23	7.19	7.84	89

Notes

1. The total capacity of each connected indoor unit is up to -7.0 kW.
2. The values above are for connecting with the following indoor unit types:
-2.0, 2.5, 3.5- kW class
Wall-mounted -FTXF-A, FTXF-B- series
3. These indoor units can only be used in a multi-unit setup.
4. Cooling capacity conditions
Indoor temperature -27°C DB / -19°C WB
Outdoor temperature -35°C DB
5. Heating capacity conditions
Indoor temperature -20°C DB
Outdoor temperature -7°C DB / -6°C WB

3D126693A

5 Capacity tables

5 - 1 Capacity Table Legend

In order to fulfill more your requirements on quick access of data in the format you require, we have developed a tool to consult capacity tables.

Below you can find the link to the capacity table database and an overview of all the tools we have to help you select the correct product:

- **Capacity table database:** lets you find back and export quickly the capacity information you are looking for based upon unit model, refrigerant temperature and connection ratio.
- You can access the capacity table viewer here:

https://my.daikin.eu/content/denv/en_US/home/applications/software-finder/capacity-table-viewer.html



- An overview of **all software tools** that we offer can be found here:

https://my.daikin.eu/denv/en_US/home/applications/software-finder.html



5 Capacity tables

5 - 2 Cooling Capacity Tables

2MXF40A

Cooling (50Hz 230V)

①	②	Indoor air temperature [°C WB]											
		14°C			16°C			18°C			19°C		
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
2.0	10.0	2.68	0.41	2.79	0.42	2.90	0.43	2.96	0.42	3.12	0.45	3.24	0.46
	12.0	2.64	0.42	2.75	0.43	2.86	0.44	2.91	0.43	3.08	0.46	3.19	0.45
	15.0	2.57	0.43	2.68	0.44	2.79	0.46	2.85	0.45	3.01	0.47	3.12	0.48
	18.0	2.50	0.44	2.61	0.46	2.72	0.47	2.78	0.47	2.95	0.48	3.06	0.49
	20.0	2.46	0.46	2.57	0.47	2.68	0.48	2.74	0.48	2.90	0.49	3.01	0.50
	22.0	2.41	0.47	2.52	0.48	2.64	0.49	2.69	0.49	2.86	0.50	2.97	0.51
	25.0	2.35	0.50	2.46	0.49	2.57	0.50	2.62	0.51	2.79	0.52	2.90	0.53
	28.0	2.28	0.50	2.39	0.51	2.50	0.52	2.56	0.53	2.72	0.54	2.83	0.55
	32.0	2.19	0.53	2.30	0.54	2.41	0.55	2.47	0.55	2.63	0.56	2.74	0.57
	35.0	2.12	0.55	2.23	0.56	2.34	0.57	2.40	0.57	2.57	0.58	2.68	0.59
	40.0	2.01	0.58	2.12	0.59	2.23	0.60	2.29	0.61	2.45	0.62	2.56	0.63
	43.0	1.94	0.60	2.06	0.61	2.17	0.62	2.22	0.63	2.39	0.64	2.50	0.66
	46.0	1.88	0.63	1.99	0.64	2.10	0.65	2.15	0.65	2.32	0.66	2.43	0.66
	10.0	3.28	0.57	3.39	0.58	3.50	0.60	3.56	0.63	3.72	0.66	3.84	0.67
	12.0	3.24	0.58	3.35	0.60	3.46	0.62	3.51	0.65	3.68	0.67	3.79	0.68
2.5	15.0	3.17	0.61	3.28	0.63	3.39	0.65	3.45	0.67	3.61	0.68	3.72	0.69
	18.0	3.10	0.65	3.21	0.67	3.32	0.68	3.38	0.68	3.55	0.69	3.66	0.70
	20.0	3.06	0.67	3.17	0.68	3.28	0.69	3.34	0.69	3.50	0.70	3.61	0.71
	22.0	3.01	0.68	3.12	0.69	3.24	0.70	3.29	0.70	3.46	0.71	3.57	0.72
	25.0	2.95	0.69	3.06	0.70	3.17	0.71	3.22	0.72	3.39	0.73	3.50	0.74
	28.0	2.88	0.71	2.99	0.72	3.10	0.73	3.16	0.74	3.32	0.75	3.43	0.76
	32.0	2.79	0.74	2.90	0.75	3.01	0.76	3.08	0.76	3.23	0.77	3.34	0.78
	35.0	2.72	0.76	2.83	0.77	2.94	0.78	3.00	0.80	3.17	0.79	3.28	0.80
	40.0	2.61	0.79	2.72	0.80	2.83	0.81	2.89	0.82	3.05	0.83	3.16	0.84
	43.0	2.54	0.81	2.66	0.82	2.77	0.83	2.82	0.84	2.99	0.85	3.10	0.86
	46.0	2.48	0.84	2.59	0.85	2.70	0.86	2.75	0.88	2.92	0.90	3.03	0.91
	10.0	4.53	0.88	4.65	0.97	4.84	0.99	4.93	1.00	5.21	1.04	5.39	1.06
	12.0	4.46	0.91	4.58	0.99	4.76	1.01	4.86	1.02	5.13	1.06	5.32	1.08
	15.0	4.35	0.95	4.47	1.02	4.65	1.05	4.75	1.06	5.02	1.09	5.21	1.11
	18.0	4.24	1.00	4.36	1.06	4.54	1.08	4.63	1.09	4.91	1.12	5.09	1.15
3.5	20.0	4.13	1.04	4.28	1.08	4.47	1.11	4.56	1.12	4.84	1.15	5.02	1.17
	22.0	4.02	1.08	4.21	1.11	4.39	1.13	4.48	1.14	4.76	1.17	4.94	1.20
	25.0	3.91	1.13	4.10	1.15	4.28	1.17	4.37	1.18	4.65	1.21	4.83	1.24
	28.0	3.80	1.17	3.98	1.19	4.17	1.21	4.26	1.22	4.54	1.26	4.72	1.28
	32.0	3.65	1.23	3.84	1.25	4.02	1.27	4.11	1.28	4.39	1.32	4.57	1.34
	35.0	3.54	1.28	3.72	1.30	3.91	1.32	4.00	1.35	4.28	1.36	4.46	1.39
	40.0	3.35	1.36	3.54	1.38	3.72	1.40	3.81	1.41	4.09	1.45	4.27	1.47
	43.0	3.24	1.41	3.43	1.44	3.61	1.46	3.70	1.47	3.93	1.47	4.08	1.47
	46.0	2.87	1.27	3.01	1.27	3.14	1.27	3.21	1.27	3.50	1.27	3.62	1.27

Notes

- The capacities are based on the following conditions:
Corresponding refrigerant piping length: 5- m
Level difference: 0-m
- The bold cells indicate the standard conditions.
- The values above are for connecting with the following indoor unit types:
·2.0, 2.5, 3.5- kW class
Wall-mounted ·FTXF-A, FTXF-B- series

①	②	Indoor air temperature [°C WB]											
		14°C			16°C			18°C			19°C		
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
2.0+2.0	10.0	4.69	0.84	4.89	0.85	5.08	0.87	5.18	0.88	5.47	0.91	5.66	0.93
	12.0	4.62	0.85	4.81	0.87	5.00	0.89	5.10	0.90	5.39	0.92	5.58	0.94
	15.0	4.50	0.88	4.69	0.90	4.89	0.92	4.98	0.92	5.27	0.95	5.47	0.97
	18.0	4.38	0.91	4.57	0.93	4.77	0.94	4.86	0.95	5.16	0.98	5.35	1.00
	20.0	4.30	0.93	4.50	0.95	4.69	0.97	4.79	0.97	5.08	1.00	5.27	1.02
	22.0	4.22	0.95	4.42	0.97	4.61	0.99	4.71	1.00	5.00	1.02	5.19	1.04
	25.0	4.11	0.98	4.30	1.00	4.49	1.02	4.59	1.03	4.88	1.06	5.07	1.07
	28.0	3.99	1.02	4.18	1.04	4.38	1.05	4.47	1.06	4.76	1.09	4.96	1.11
	32.0	3.83	1.07	4.03	1.09	4.22	1.10	4.32	1.11	4.61	1.14	4.80	1.16
	35.0	3.72	1.10	3.91	1.11	4.10	1.13	4.20	1.20	4.49	1.18	4.68	1.20
	40.0	3.52	1.13	3.71	1.14	3.91	1.16	4.00	1.17	4.29	1.20	4.49	1.21
	43.0	3.40	1.17	3.60	1.19	3.79	1.20	3.89	1.21	4.18	1.24	4.37	1.26
	46.0	3.29	1.22	3.48	1.24	3.67	1.27	3.77	1.28	4.05	1.30	4.20	1.30
	10.0	4.79	0.84	4.99	0.85	5.18	0.87	5.28	0.88	5.57	0.91	5.76	0.93
	12.0	4.72	0.85	4.91	0.87	5.10	0.89	5.20	0.90	5.49	0.92	5.68	0.94
	15.0	4.60	0.88	4.79	0.90	4.99	0.92	5.08	0.92	5.37	0.95	5.57	0.97
2.0+2.5	18.0	4.48	0.91	4.67	0.93	4.87	0.94	4.96	0.95	5.26	0.98	5.45	1.00
	20.0	4.40	0.93	4.60	0.95	4.79	0.97	4.89	0.97	5.18	1.00	5.37	1.02
	22.0	4.32	0.95	4.52	0.97	4.71	0.99	4.81	1.00	5.10	1.02	5.29	1.04
	25.0	4.21	0.98	4.40	1.00	4.59	1.02	4.69	1.03	4.98	1.06	5.17	1.07
	28.0	4.09	1.02	4.28	1.04	4.48	1.05	4.57	1.06	4.86	1.09	5.06	1.11
	32.0	3.93	1.07	4.13	1.09	4.32	1.10	4.42	1.11	4.71	1.14	4.90	1.16
	35.0	3.82	1.10	4.01	1.11	4.20	1.13	4.30	1.20	4.59	1.18	4.78	1.20
	40.0	3.62	1.13	3.81	1.14	4.01	1.16	4.10	1.17	4.39	1.20	4.59	1.21
	43.0	3.50	1.17	3.70	1.19	3.89	1.20	3.99	1.21	4.28	1.24	4.47	1.26
	46.0	3.39	1.22	3.58	1.24	3.77	1.27	3.87	1.28	4.15	1.30	4.30	1.30

Symbols

- TC: Total capacity [kW]
PI: Power input [kW]
①: Indoor unit combinations
②: Outdoor temperature [°C DB]

3D126699A

5 Capacity tables

5 - 2 Cooling Capacity Tables

2MXF40A

Cooling ·(50Hz 230V)·

①	②	Indoor air temperature [°C WB]											
		14°C		16°C		18°C		19°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
2.0+3.5	10,0	4,99	0,94	5,19	0,94	5,38	0,96	5,48	0,97	5,77	0,94	5,96	1,02
	12,0	4,87	0,94	5,11	0,96	5,30	0,98	5,40	0,99	5,69	0,95	5,88	1,03
	15,0	4,75	0,97	4,99	0,99	5,19	1,01	5,28	1,01	5,57	0,98	5,77	1,06
	18,0	4,63	1,00	4,87	1,02	5,07	1,03	5,16	1,04	5,46	1,01	5,65	1,09
	20,0	4,55	1,02	4,80	1,04	4,99	1,06	5,09	1,06	5,38	1,03	5,57	1,11
	22,0	4,47	1,04	4,72	1,06	4,91	1,08	5,01	1,09	5,30	1,05	5,49	1,13
	25,0	4,36	1,07	4,60	1,09	4,79	1,11	4,89	1,12	5,18	1,09	5,37	1,16
	28,0	4,24	1,11	4,48	1,13	4,63	1,14	4,77	1,15	5,06	1,12	5,26	1,20
	32,0	4,08	1,16	4,28	1,18	4,47	1,19	4,57	1,20	4,91	1,17	5,10	1,25
	35,0	3,97	1,19	4,16	1,20	4,35	1,22	4,50	1,29	4,79	1,21	4,98	1,29
	40,0	3,77	1,22	3,96	1,23	4,16	1,25	4,25	1,26	4,59	1,23	4,79	1,30
	43,0	3,65	1,26	3,85	1,28	4,04	1,29	4,14	1,30	4,48	1,27	4,67	1,35
2.5+2.5	10,0	4,89	0,88	5,09	0,90	5,28	0,92	5,37	0,93	5,64	0,97	5,85	0,99
	12,0	4,81	0,90	5,01	0,92	5,18	0,94	5,29	0,95	5,55	0,99	5,77	1,01
	15,0	4,68	0,93	4,88	0,96	5,05	0,98	5,16	0,99	5,42	1,02	5,64	1,04
	18,0	4,55	0,97	4,75	0,99	4,92	1,01	5,03	1,02	5,30	1,05	5,51	1,07
	20,0	4,46	0,99	4,66	1,01	4,84	1,03	4,94	1,04	5,21	1,08	5,42	1,10
	22,0	4,38	1,02	4,58	1,04	4,75	1,06	4,86	1,07	5,12	1,10	5,34	1,12
	25,0	4,25	1,06	4,45	1,08	4,62	1,10	4,73	1,11	5,00	1,14	5,21	1,16
	28,0	4,12	1,10	4,32	1,12	4,49	1,14	4,60	1,15	4,87	1,18	5,08	1,20
	32,0	3,95	1,15	4,15	1,17	4,32	1,20	4,43	1,21	4,70	1,24	4,91	1,26
	35,0	3,82	1,19	4,02	1,21	4,19	1,23	4,40	1,25	4,57	1,28	4,78	1,30
	40,0	3,61	1,23	3,81	1,25	3,98	1,27	4,19	1,28	4,35	1,31	4,57	1,33
	43,0	3,48	1,28	3,68	1,30	3,85	1,32	4,06	1,33	4,23	1,36	4,44	1,39
2.5+3.5	10,0	5,14	0,91	5,35	0,93	5,58	0,95	5,67	0,96	5,99	1,00	6,20	1,02
	12,0	5,06	0,93	5,27	0,95	5,48	0,97	5,59	0,98	5,90	1,02	6,12	1,04
	15,0	4,93	0,96	5,14	0,99	5,35	1,01	5,46	1,02	5,77	1,05	5,99	1,07
	18,0	4,80	1,00	5,01	1,02	5,22	1,04	5,33	1,05	5,65	1,08	5,86	1,10
	20,0	4,71	1,02	4,92	1,04	5,14	1,06	5,24	1,07	5,56	1,11	5,77	1,13
	22,0	4,63	1,05	4,84	1,07	5,05	1,09	5,16	1,10	5,47	1,13	5,69	1,15
	25,0	4,50	1,09	4,71	1,11	4,92	1,13	5,03	1,14	5,35	1,17	5,56	1,19
	28,0	4,37	1,13	4,58	1,15	4,79	1,17	4,90	1,18	5,22	1,21	5,43	1,23
	32,0	4,20	1,18	4,41	1,20	4,62	1,23	4,73	1,24	5,05	1,27	5,26	1,29
	35,0	4,07	1,23	4,28	1,25	4,49	1,27	4,60	1,28	4,92	1,31	5,13	1,33
	40,0	3,86	1,31	4,07	1,33	4,28	1,35	4,39	1,36	4,70	1,39	4,92	1,41
	43,0	3,73	1,36	3,94	1,38	4,15	1,40	4,26	1,41	4,58	1,44	4,79	1,47
	46,0	3,36	1,27	3,52	1,27	3,67	1,27	3,75	1,27	3,97	1,27	4,11	1,27

Symbols

TC: Total capacity [kW]

PI: Power input [kW]

①: Indoor unit combinations

②: Outdoor temperature [°C DB]

Notes

- The capacities are based on the following conditions:
Corresponding refrigerant piping length: ·5· m
Level difference: ·0·m
- The bold cells indicate the standard conditions.
- The values above are for connecting with the following indoor unit types:
·2.0, 2.5, 3.5· kW class
Wall-mounted ·FTXF-A, FTXF-B· series

3D126700A

5 Capacity tables

5 - 2 Cooling Capacity Tables

5

2MXF50A

Cooling (50Hz 230V)

①	②	Indoor air temperature [°C WB]											
		14°C		16°C		18°C		19°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
2.0	10.0	2.91	0.50	3.03	0.51	3.15	0.52	3.21	0.52	3.38	0.54	3.50	0.56
	12.0	2.86	0.51	2.98	0.52	3.10	0.52	3.16	0.54	3.34	0.55	3.46	0.56
	15.0	2.78	0.52	2.90	0.54	3.02	0.55	3.08	0.55	3.26	0.57	3.38	0.58
	18.0	2.71	0.55	2.83	0.55	2.95	0.56	3.01	0.57	3.19	0.58	3.31	0.59
	20.0	2.66	0.56	2.78	0.57	2.90	0.57	0.00	0.58	3.14	0.59	3.26	0.61
	22.0	2.62	0.57	2.74	0.58	2.85	0.59	2.91	0.59	3.09	0.61	3.21	0.62
	25.0	2.54	0.58	2.66	0.59	2.78	0.61	2.84	0.62	3.02	0.63	3.14	0.64
	28.0	2.47	0.61	2.59	0.62	2.71	0.63	2.77	0.64	2.95	0.65	3.07	0.67
	32.0	2.37	0.64	2.49	0.65	2.61	0.67	2.67	0.67	2.85	0.68	2.97	0.69
	35.0	2.30	0.67	2.42	0.68	2.54	0.69	2.60	0.69	2.78	0.70	2.90	0.71
2.5	40.0	2.18	0.70	2.30	0.71	2.42	0.73	2.48	0.74	2.66	0.75	2.78	0.76
	43.0	2.11	0.74	2.23	0.74	2.35	0.75	2.41	0.76	2.59	0.77	2.71	0.79
	46.0	2.03	0.76	2.15	0.77	2.27	0.79	2.33	0.79	2.51	0.81	2.63	0.82
	10.0	3.47	0.65	3.61	0.66	3.76	0.68	3.83	0.68	4.03	0.69	4.17	0.73
	12.0	3.41	0.66	3.55	0.68	3.70	0.68	3.77	0.69	3.98	0.71	4.13	0.73
	15.0	3.31	0.68	3.46	0.69	3.60	0.71	3.67	0.71	3.89	0.74	4.03	0.76
	18.0	3.23	0.71	3.37	0.71	3.52	0.73	3.59	0.74	3.80	0.76	3.95	0.77
	20.0	3.17	0.73	3.31	0.74	3.46	0.74	3.53	0.76	3.74	0.77	3.89	0.79
	22.0	3.12	0.74	3.27	0.76	3.40	0.77	3.47	0.77	3.68	0.79	3.83	0.80
	25.0	3.03	0.76	3.17	0.77	3.31	0.79	3.39	0.80	3.60	0.82	3.74	0.84
3.5	28.0	2.95	0.79	3.09	0.80	3.23	0.82	3.30	0.84	3.52	0.85	3.66	0.87
	32.0	2.83	0.84	2.97	0.85	3.11	0.87	3.18	0.87	3.40	0.88	3.54	0.90
	35.0	2.74	0.87	2.89	0.88	3.03	0.90	3.10	0.92	3.31	0.92	3.46	0.93
	40.0	2.60	0.92	2.74	0.93	2.89	0.95	2.96	0.96	3.17	0.98	3.31	1.00
	43.0	2.52	0.96	2.66	0.96	2.80	0.98	2.87	1.00	3.09	1.01	3.23	1.03
	46.0	2.42	1.00	2.56	1.01	2.71	1.03	2.78	1.03	2.99	1.06	3.14	1.07
	10.0	4.48	1.01	4.66	1.03	4.85	1.06	4.94	1.06	5.20	1.08	5.38	1.13
	12.0	4.40	1.03	4.58	1.06	4.77	1.06	4.86	1.08	5.14	1.11	5.32	1.13
	15.0	4.28	1.06	4.46	1.08	4.65	1.11	4.74	1.11	5.02	1.16	5.20	1.18
	18.0	4.17	1.11	4.35	1.11	4.54	1.13	4.63	1.16	4.91	1.18	5.09	1.20
3.5	20.0	4.09	1.13	4.28	1.16	4.46	1.16	4.55	1.18	4.83	1.20	5.02	1.23
	22.0	4.03	1.16	4.22	1.18	4.38	1.20	4.48	1.20	4.75	1.24	4.94	1.25
	25.0	3.91	1.18	4.09	1.20	4.28	1.23	4.37	1.25	4.65	1.28	4.83	1.30
	28.0	3.80	1.23	3.98	1.25	4.17	1.28	4.26	1.30	4.54	1.33	4.72	1.35
	32.0	3.65	1.30	3.83	1.32	4.02	1.35	4.11	1.35	4.38	1.37	4.57	1.40
	35.0	3.54	1.35	3.72	1.38	3.91	1.40	4.00	1.42	4.28	1.44	4.46	1.45
	40.0	3.35	1.42	3.53	1.44	3.72	1.47	3.81	1.49	4.09	1.52	4.27	1.54
	43.0	3.25	1.50	3.43	1.50	3.62	1.52	3.71	1.55	3.98	1.57	4.17	1.60
	46.0	3.12	1.55	3.31	1.57	3.49	1.60	3.58	1.60	3.86	1.64	4.05	1.67

Notes

- The capacities are based on the following conditions:
Corresponding refrigerant piping length: 5- m
Level difference: 0-m
- The bold cells indicate the standard conditions.
- The values above are for connecting with the following indoor unit types:
-2.0, 2.5, 3.5- kW class
Wall-mounted -FTXF-A, FTXF-B- series

①		Indoor air temperature [°C WB]											
		14°C		16°C		18°C		19°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
②		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
2.0+2.0	10.0	5.60	1.12	5.83	1.14	6.06	1.17	6.17	1.17	6.50	1.19	6.73	1.23
	12.0	5.50	1.14	5.73	1.17	5.96	1.16	6.08	1.19	6.42	1.21	6.65	1.23
	15.0	5.35	1.17	5.58	1.19	5.81	1.21	5.92	1.21	6.27	1.25	6.50	1.28
	18.0	5.21	1.21	5.44	1.21	5.67	1.23	5.79	1.25	6.13	1.28	6.37	1.30
	20.0	5.12	1.23	5.35	1.26	5.58	1.25	0.00	1.28	6.04	1.30	6.27	1.32
	22.0	5.04	1.26	5.27	1.28	5.48	1.30	5.60	1.30	5.94	1.32	6.17	1.34
	25.0	4.88	1.28	5.12	1.30	5.35	1.32	5.46	1.34	5.81	1.37	6.04	1.39
	28.0	4.75	1.32	4.98	1.34	5.21	1.37	5.33	1.39	5.67	1.41	5.90	1.43
	32.0	4.56	1.39	4.79	1.41	5.02	1.44	5.13	1.43	5.48	1.46	5.71	1.48
	35.0	4.42	1.43	4.65	1.46	4.88	1.48	5.00	1.48	5.35	1.50	5.58	1.52
2.0+2.5	40.0	4.19	1.50	4.42	1.52	4.65	1.55	4.77	1.57	5.12	1.59	5.35	1.61
	43.0	4.06	1.57	4.29	1.57	4.52	1.59	4.63	1.61	4.98	1.63	5.21	1.66
	46.0	3.90	1.61	4.13	1.64	4.37	1.66	4.48	1.66	4.83	1.70	5.06	1.73
	10.0	5.71	1.15	5.94	1.17	6.18	1.19	6.30	1.19	6.63	1.21	6.87	1.26
	12.0	5.61	1.17	5.85	1.19	6.08	1.19	6.20	1.21	6.55	1.24	6.79	1.26
	15.0	5.45	1.19	5.69	1.21	5.92	1.24	6.04	1.24	6.39	1.28	6.63	1.31
	18.0	5.32	1.24	5.55	1.24	5.79	1.26	5.90	1.28	6.26	1.31	6.49	1.33
	20.0	5.22	1.26	5.45	1.29	5.69	1.28	0.00	1.31	6.16	1.33	6.39	1.35
	22.0	5.14	1.29	5.37	1.31	5.59	1.33	5.71	1.33	6.06	1.35	6.30	1.37
	25.0	4.98	1.31	5.22	1.33	5.45	1.35	5.57	1.38	5.92	1.40	6.16	1.42
3.5	28.0	4.85	1.35	5.08	1.37	5.32	1.40	5.43	1.42	5.79	1.45	6.02	1.47
	32.0	4.65	1.42	4.88	1.45	5.12	1.47	5.24	1.47	5.59	1.49	5.83	1.51
	35.0	4.51	1.47	4.75	1.49	4.98	1.51	5.10	1.51	5.45	1.53	5.69	1.56
	40.0	4.28	1.53	4.51	1.56	4.75	1.58	4.86	1.61	5.22	1.63	5.45	1.65
	43.0	4.14	1.61	4.37	1.60	4.61	1.63	4.73	1.65	5.08	1.67	5.32	1.70
	46.0	3.98	1.65	4.22	1.67	4.45	1.70	4.57	1.70	4.92	1.74	5.16	1.77

Symbols

- TC: Total capacity [kW]
PI: Power input [kW]
①: Indoor unit combinations
②: Outdoor temperature [°C DB]

3D126702A

2MXF50A

Cooling (50Hz 230V)

①	②	Indoor air temperature [°C WB]											
		14°C		16°C		18°C		19°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
2.0+3.5	10.0	6.04	1.30	6.28	1.32	6.53	1.35	6.66	1.36	7.03	1.39	7.28	1.44
	12.0	5.93	1.32	6.18	1.35	6.43	1.37	6.56	1.39	6.93	1.41	7.18	1.44
	15.0	5.78	1.36	6.03	1.39	6.28	1.40	6.41	1.41	6.78	1.45	7.03	1.48
	18.0	5.63	1.39	5.88	1.42	6.13	1.44	6.25	1.46	6.63	1.50	6.88	1.52
	20.0	5.53	1.42	5.78	1.45	6.03	1.47	6.15	1.49	6.53	1.51	6.78	1.54
	22.0	5.43	1.45	5.68	1.48	5.93	1.50	6.05	1.52	6.43	1.55	6.68	1.57
	25.0	5.28	1.50	5.53	1.53	5.78	1.54	5.90	1.55	6.28	1.59	6.52	1.62
	28.0	5.13	1.54	5.38	1.57	5.63	1.59	5.75	1.60	6.13	1.64	6.37	1.66
	32.0	4.93	1.61	5.18	1.64	5.43	1.66	5.55	1.67	5.92	1.70	6.17	1.73
	35.0	4.78	1.66	5.03	1.68	5.28	1.71	5.40	1.72	5.77	1.76	6.02	1.79
2.5+2.5	40.0	4.53	1.76	4.78	1.78	5.02	1.80	5.15	1.81	5.52	1.85	5.77	1.88
	43.0	4.38	1.81	4.62	1.84	4.87	1.86	5.00	1.87	5.37	1.91	5.62	1.93
	46.0	4.22	1.88	4.47	1.90	4.72	1.93	4.85	1.93	5.22	1.97	5.47	1.99
	10.0	5.92	1.24	6.17	1.26	6.41	1.28	6.53	1.29	6.90	1.33	7.14	1.37
	12.0	5.82	1.26	6.07	1.28	6.31	1.30	6.44	1.32	6.80	1.35	7.05	1.37
	15.0	5.68	1.29	5.92	1.32	6.17	1.34	6.29	1.35	6.65	1.39	6.90	1.41
	18.0	5.53	1.33	5.77	1.35	6.02	1.38	6.14	1.39	6.51	1.43	6.75	1.44
	20.0	5.43	1.35	5.67	1.38	5.92	1.40	6.04	1.42	6.41	1.45	6.65	1.47
	22.0	5.33	1.38	5.58	1.41	5.82	1.43	5.94	1.44	6.31	1.48	6.55	1.50
	25.0	5.18	1.43	5.43	1.45	5.67	1.47	5.79	1.49	6.16	1.51	6.40	1.54
2.5+3.5	28.0	5.04	1.47	5.28	1.50	5.52	1.51	5.65	1.53	6.01	1.56	6.26	1.59
	32.0	4.84	1.53	5.08	1.56	5.33	1.58	5.45	1.60	5.81	1.62	6.06	1.65
	35.0	4.69	1.59	4.93	1.60	5.18	1.63	5.30	1.64	5.67	1.68	5.91	1.70
	40.0	4.44	1.68	4.69	1.69	4.93	1.72	5.05	1.73	5.42	1.77	5.66	1.78
	43.0	4.29	1.73	4.54	1.75	4.78	1.77	4.91	1.78	5.27	1.82	5.52	1.85
	46.0	4.15	1.78	4.39	1.81	4.63	1.84	4.76	1.85	5.12	1.88	5.37	1.90
	10.0	6.04	1.30	6.28	1.32	6.53	1.35	6.66	1.36	7.03	1.39	7.28	1.44
	12.0	5.93	1.32	6.19	1.35	6.43	1.37	6.56	1.39	6.93	1.41	7.18	1.44
	15.0	5.78	1.36	6.03	1.39	6.28	1.40	6.41	1.41	6.78	1.45	7.03	1.48
	18.0	5.64	1.34	5.88	1.36	6.13	1.39	6.25	1.39	6.63	1.43	6.87	1.46
2.5+3.5	20.0	5.53	1.37	5.78	1.39	6.03	1.41	6.16	1.42	6.53	1.45	6.77	1.48
	22.0	5.43	1.40	5.68	1.41	5.93	1.44	6.06	1.46	6.43	1.49	6.68	1.53
	25.0	5.28	1.44	5.53	1.45	5.78	1.48	5.90	1.50	6.27	1.53	6.53	1.55
	28.0	5.13	1.48	5.38	1.51	5.63	1.52	5.75	1.54	6.13	1.58	6.37	1.60
	32.0	4.93	1.54	5.17	1.57	5.43	1.59	5.55	1.60	5.92	1.63	6.18	1.66
	35.0	4.78	1.59	5.03	1.62	5.28	1.64	5.40	1.65	5.77	1.69	6.02	1.71
	40.0	4.53	1.69	4.78	1.71	5.02	1.74	5.15	1.75	5.52	1.79	5.77	1.80
	43.0	4.38	1.74	4.62	1.76	4.87	1.79	5.00	1.80	5.37	1.83	5.62	1.86
	46.0	4.22	1.80	4.48	1.82	4.72	1.85	4.85	1.86	5.22	1.89	5.47	1.91

Capacity tables

5 - 3 Heating Capacity Tables

2MXF40A

Heating (50Hz 230V)

①	②	Indoor air temperature [°C DB]															
		16°C		18°C		20°C		21°C		22°C		24°C					
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI				
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW		
2.0	-15.0	2.05	1.00	1.99	1.01	1.94	1.02	1.92	1.03	1.89	1.04	1.84	1.05				
	-11.0	2.47	1.06	2.41	1.07	2.36	1.08	2.34	1.08	2.31	1.09	2.26	1.10				
	-6.0	2.88	1.11	2.83	1.12	2.78	1.13	2.76	1.13	2.73	1.14	2.68	1.15				
	0.0	3.30	1.16	3.25	1.17	3.20	1.18	3.17	1.18	3.15	1.19	3.10	1.20				
	6.0	3.80	1.22	3.75	1.23	3.70	1.26	3.67	1.25	3.65	1.25	3.60	1.26				
	10.0	4.14	1.26	4.09	1.27	4.03	1.28	4.01	1.29	3.98	1.29	3.93	1.30				
	15.0	4.55	1.31	4.50	1.32	4.45	1.33	4.43	1.34	4.40	1.34	4.35	1.35				
2.5	-15.0	2.45	1.28	2.34	1.29	2.29	1.30	2.27	1.31	2.24	1.32	2.19	1.32				
	-11.0	2.67	1.30	2.61	1.31	2.56	1.32	2.54	1.32	2.51	1.33	2.46	1.34				
	-6.0	3.28	1.35	3.13	1.36	3.08	1.37	3.06	1.37	3.03	1.38	2.98	1.39				
	0.0	3.70	1.40	3.65	1.41	3.60	1.42	3.57	1.42	3.55	1.43	3.50	1.44				
	6.0	4.20	1.46	4.15	1.47	4.10	1.50	4.07	1.49	4.05	1.49	4.00	1.50				
	10.0	4.54	1.50	4.49	1.51	4.43	1.52	4.41	1.53	4.38	1.53	4.33	1.54				
	15.0	4.55	1.51	4.50	1.52	4.45	1.53	4.43	1.54	4.40	1.54	4.35	1.55				
3.5	-15.0	2.64	1.50	2.58	1.51	2.53	1.52	2.50	1.53	2.47	1.54	2.42	1.55				
	-11.0	2.93	1.51	2.87	1.52	2.81	1.53	2.78	1.54	2.75	1.55	2.69	1.56				
	-6.0	3.43	1.52	3.37	1.54	3.31	1.55	3.28	1.56	3.25	1.57	3.19	1.59				
	0.0	3.93	1.59	3.86	1.61	3.80	1.62	3.77	1.63	3.74	1.64	3.68	1.66				
	6.0	4.52	1.68	4.46	1.69	4.40	1.73	4.37	1.72	4.34	1.73	4.28	1.74				
	10.0	4.92	1.74	4.86	1.75	4.80	1.76	4.77	1.77	4.74	1.78	4.68	1.80				
	15.0	4.94	1.75	4.88	1.76	4.82	1.77	4.79	1.78	4.76	1.79	4.70	1.80				
2.0+2.0	-15.0	2.50	0.93	2.48	0.93	2.42	0.94	2.39	0.95	2.35	0.95	2.29	0.96				
	-11.0	3.06	0.97	3.00	0.98	2.94	0.99	2.91	1.00	2.87	1.00	2.81	1.01				
	-6.0	3.58	1.02	3.52	1.03	3.46	1.04	3.43	1.04	3.39	1.05	3.33	1.06				
	0.0	4.10	1.06	4.04	1.07	3.98	1.08	3.94	1.09	3.91	1.09	3.85	1.10				
	6.0	4.73	1.12	4.66	1.13	4.60	1.14	4.57	1.15	4.54	1.15	4.47	1.16				
	10.0	5.14	1.16	5.08	1.17	5.02	1.18	4.98	1.18	4.95	1.19	4.89	1.20				
	15.0	5.86	1.20	5.80	1.22	5.53	1.23	5.50	1.24	5.47	1.24	5.41	1.25				
2.0+2.5	-15.0	2.60	0.94	2.58	0.95	2.48	0.96	2.44	0.96	2.39	0.97	2.33	0.98				
	-11.0	3.16	0.98	3.10	0.99	3.01	1.00	2.96	1.01	2.92	1.01	2.86	1.02				
	-6.0	3.68	1.03	3.62	1.04	3.53	1.05	3.50	1.05	3.46	1.06	3.40	1.07				
	0.0	4.20	1.07	4.14	1.08	4.05	1.09	4.01	1.10	3.98	1.10	3.92	1.11				
	6.0	4.83	1.13	4.76	1.14	4.70	1.16	4.67	1.16	4.64	1.16	4.57	1.17				
	10.0	5.24	1.17	5.18	1.18	5.12	1.19	5.08	1.19	5.05	1.20	4.99	1.21				
	15.0	5.96	1.21	5.70	1.22	5.63	1.23	5.60	1.24	5.57	1.24	5.51	1.25				

Notes

- The capacities are based on the following conditions:
Corresponding refrigerant piping length: 5- m
Level difference: 0-m
- The bold cells indicate the standard conditions.
- The values above are for connecting with the following indoor unit types:
-2.0, 2.5, 3.5- kW class
Wall-mounted ·FTXF-A, FTXF-B- series
- The heating capacity does not include the capacity drop that occurs during a frosting period and defrost operation.

①	②	Indoor air temperature [°C DB]																							
		16°C				18°C				20°C				21°C				22°C				24°C			
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI				
2.0+3.5	-15.0	2.70	0.94	2.68	0.95	2.62	0.96	2.60	0.96	2.55	0.97	2.49	0.98												
	-11.0	3.26	0.98	3.20	0.99	3.14	1.00	3.11	1.01	3.07	1.01	3.01	1.02												
	-6.0	3.78	1.03	3.72	1.04	3.66	1.05	3.63	1.05	3.59	1.06	3.53	1.07												
	0.0	4.30	1.07	4.24	1.08	4.18	1.09	4.14	1.10	4.11	1.10	4.05	1.11												
	6.0	4.93	1.13	4.86	1.14	4.80	1.16	4.77	1.16	4.74	1.16	4.67	1.17												
	10.0	5.34	1.17	5.28	1.18	5.22	1.19	5.18	1.19	5.15	1.20	5.09	1.21												
	15.0	6.06	1.21	5.80	1.22	5.73	1.23	5.70	1.24	5.67	1.24	5.61	1.25												
2.5+2.5	-15.0	2.58	0.91	2.55	0.92	2.49	0.93	2.44	0.94	2.41	0.95	2.34	0.96												
	-11.0	3.13	0.96	3.08	0.97	3.02	0.98	2.97	1.00	2.94	1.00	2.87	1.01												
	-6.0	3.66	1.01	3.59	1.02	3.53	1.03	3.50	1.04	3.47	1.04	3.40	1.06												
	0.0	4.19	1.06	4.12	1.07	4.06	1.08	4.03	1.09	4.00	1.09	3.93	1.10												
	6.0	4.83	1.12	4.77	1.13	4.70	1.14	4.67	1.15	4.64	1.15	4.57	1.16												
	10.0	5.19	1.16	5.15	1.17	5.12	1.18	5.09	1.18	5.06	1.19	4.99	1.20												
	15.0	5.88	1.19	5.77	1.22	5.66	1.23	5.62	1.23	5.59	1.24	5.53	1.25												
2.5+3.5	-15.0	2.70	0.93	2.69	0.93	2.62	0.95	2.59	0.95	2.56	0.96	2.49	0.97												
	-11.0	3.28	0.97	3.22	0.98	3.15	0.99	3.12	1.00	3.09	1.00	3.02	1.01												
	-6.0	3.81	1.02	3.75	1.03	3.68	1.04	3.65	1.04	3.62	1.05	3.55	1.06												
	0.0	4.34	1.06	4.28	1.07	4.21	1.09	4.18	1.09	4.15	1.10	4.08	1.11												
	6.0	4.98	1.12	4.91	1.13	4.80	1.14	4.75	1.15	4.74	1.15	4.72	1.16												
	10.0	5.40	1.16	5.34	1.17	5.27	1.18	5.24	1.18	5.21	1.19	5.14	1.20												
	15.0	6.09	1.19	5.87	1.22	5.81	1.23	5.77	1.23	5.74	1.24	5.68	1.25												

Symbols

- TC: Total capacity [kW]
PI: Power input [kW]
①: Indoor unit combinations
②: Outdoor temperature [°C WB]

3D126701A

2MXF50A


Heating (50Hz 230V)

①		Indoor air temperature [°C DB]															
		16°C		18°C		20°C		21°C		22°C		24°C					
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI				
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW		
2.0	-15.0	2.05	0.85	1.99	0.86	1.94	0.87	1.92	0.88	1.89	0.89	1.84	0.90				
	-11.0	2.47	0.93	2.41	0.94	2.36	0.95	2.34	0.96	2.31	0.96	2.26	0.97				
	-6.0	2.88	0.99	2.83	1.00	2.78	1.01	2.76	1.01	2.73	1.02	2.68	1.02				
	0.0	3.30	1.05	3.25	1.06	3.20	1.07	3.17	1.07	3.15	1.08	3.10	1.09				
	6.0	3.80	1.11	3.75	1.12	3.70	1.13	3.67	1.13	3.65	1.14	3.60	1.15				
	10.0	4.14	1.15	4.09	1.16	4.03	1.17	4.01	1.17	3.98	1.18	3.93	1.19				
	15.0	4.55	1.19	4.50	1.20	4.45	1.21	4.43	1.21	4.40	1.22	4.35	1.23				
2.5	-15.0	2.45	1.18	2.34	1.19	2.29	1.20	2.27	1.20	2.24	1.21	2.19	1.22				
	-11.0	2.67	1.20	2.61	1.21	2.56	1.22	2.54	1.22	2.51	1.22	2.46	1.23				
	-6.0	3.28	1.24	3.13	1.25	3.08	1.26	3.06	1.26	3.03	1.27	2.98	1.28				
	0.0	3.70	1.29	3.65	1.30	3.60	1.31	3.57	1.31	3.55	1.31	3.50	1.32				
	6.0	4.20	1.34	4.15	1.35	4.10	1.34	4.07	1.36	4.03	1.37	4.00	1.38				
	10.0	4.54	1.38	4.49	1.39	4.43	1.40	4.41	1.40	4.38	1.41	4.33	1.42				
	15.0	4.95	1.42	4.90	1.43	4.85	1.44	4.83	1.44	4.80	1.45	4.75	1.46				
3.5	-15.0	2.64	1.30	2.58	1.31	2.53	1.32	2.50	1.33	2.47	1.34	2.42	1.35				
	-11.0	2.93	1.31	2.87	1.32	2.81	1.33	2.78	1.34	2.75	1.35	2.69	1.36				
	-6.0	3.43	1.36	3.37	1.37	3.31	1.38	3.28	1.39	3.25	1.39	3.19	1.41				
	0.0	4.00	1.44	3.94	1.45	3.87	1.47	3.84	1.47	3.81	1.48	3.75	1.49				
	6.0	4.73	1.52	4.66	1.54	4.60	1.53	4.58	1.56	4.54	1.56	4.47	1.58				
	10.0	5.14	1.57	5.08	1.58	5.02	1.60	4.98	1.60	4.95	1.61	4.89	1.62				
	15.0	5.66	1.63	5.60	1.64	5.54	1.66	5.50	1.66	5.46	1.67	5.40	1.68				
2.0+2.0	-15.0	2.51	1.21	2.49	1.21	2.43	1.22	2.40	1.22	2.36	1.24	2.30	1.25				
	-11.0	3.15	1.26	3.08	1.28	3.00	1.29	2.96	1.29	2.92	1.30	2.84	1.31				
	-6.0	4.06	1.34	3.98	1.36	3.90	1.37	3.86	1.37	3.82	1.38	3.74	1.39				
	0.0	4.96	1.42	4.88	1.44	4.80	1.45	4.76	1.46	4.72	1.46	4.64	1.47				
	6.0	5.86	1.50	5.78	1.52	5.70	1.53	5.66	1.54	5.62	1.54	5.54	1.56				
	10.0	6.37	1.55	6.29	1.56	6.21	1.58	6.18	1.58	6.14	1.59	6.06	1.60				
	15.0	7.02	1.61	6.94	1.62	6.86	1.63	6.82	1.64	6.78	1.65	6.70	1.66				
2.0+2.5	-15.0	2.61	1.23	2.59	1.24	2.49	1.25	2.45	1.27	2.40	1.27	2.34	1.28				
	-11.0	3.25	1.28	3.18	1.30	3.10	1.31	3.06	1.31	3.03	1.32	2.94	1.33				
	-6.0	4.16	1.36	4.08	1.38	4.00	1.39	3.96	1.39	3.92	1.40	3.84	1.41				
	0.0	5.06	1.44	4.98	1.46	4.90	1.47	4.86	1.48	4.82	1.48	4.74	1.49				
	6.0	5.96	1.52	5.88	1.54	5.80	1.55	5.76	1.56	5.72	1.56	5.64	1.58				
	10.0	6.47	1.57	6.39	1.58	6.31	1.60	6.28	1.60	6.24	1.61	6.16	1.62				
	15.0	7.12	1.63	7.04	1.64	6.96	1.65	6.92	1.66	6.88	1.67	6.80	1.68				

6 Dimensional drawings

6 - 1 Dimensional Drawings



2MXF-A

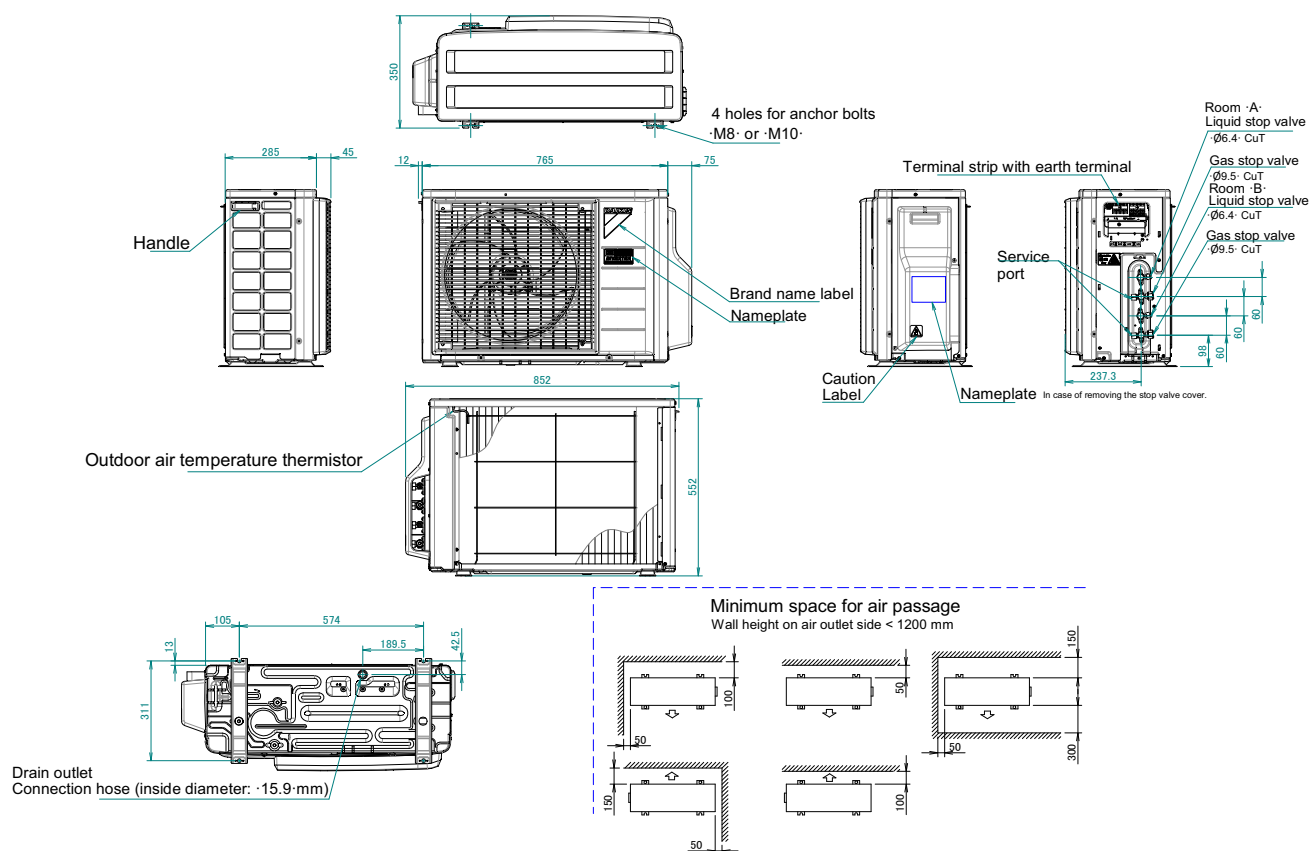

7 Centre of gravity

7 - 1 Centre of Gravity

2MXF-A

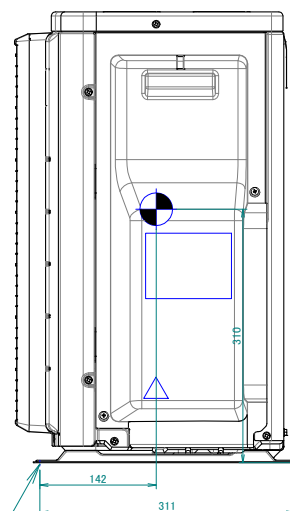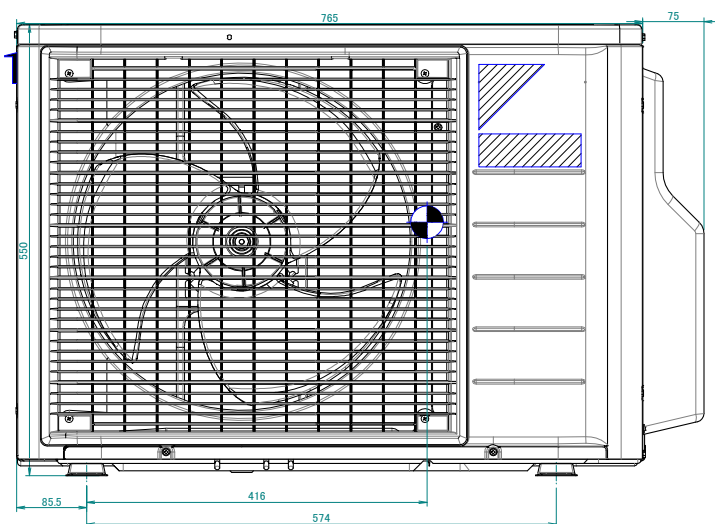

Foundation bolt hole

4D101315A


8 Piping diagrams

8 - 1 Piping Diagrams

8

2MXF40A


Outdoor unit

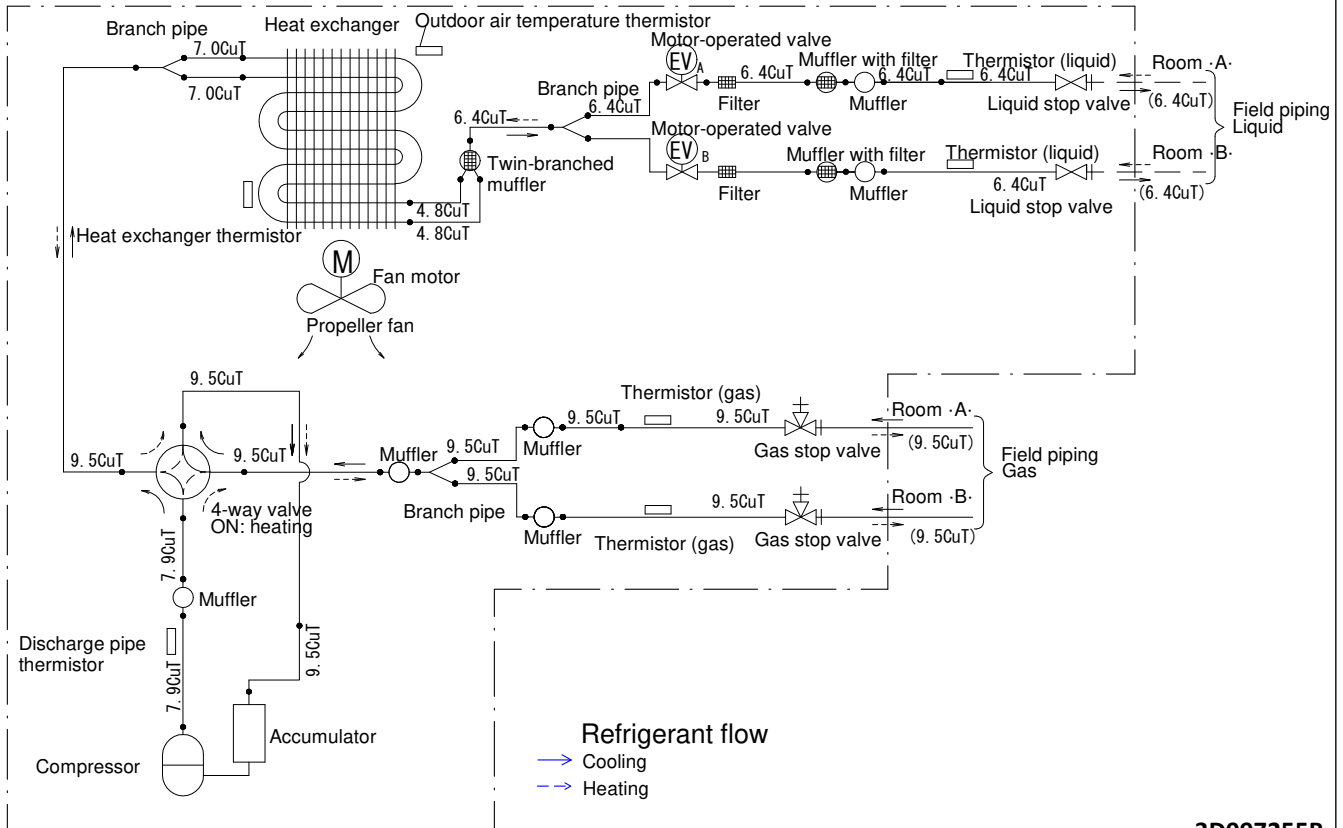

3D097255B


2MXF50A

Outdoor unit

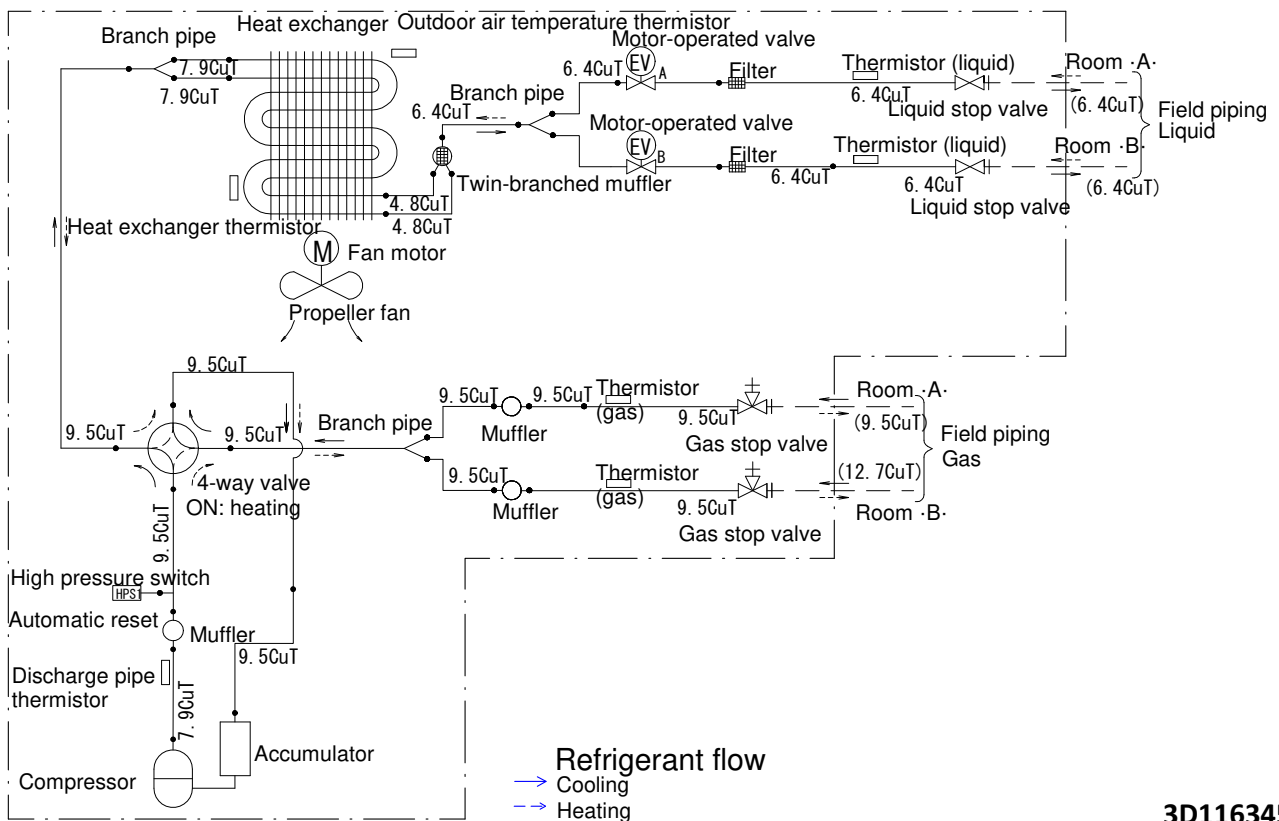


3D116345

Wiring diagram




Wiring diagram




10 Sound data

10 - 1 Sound Pressure Spectrum

10

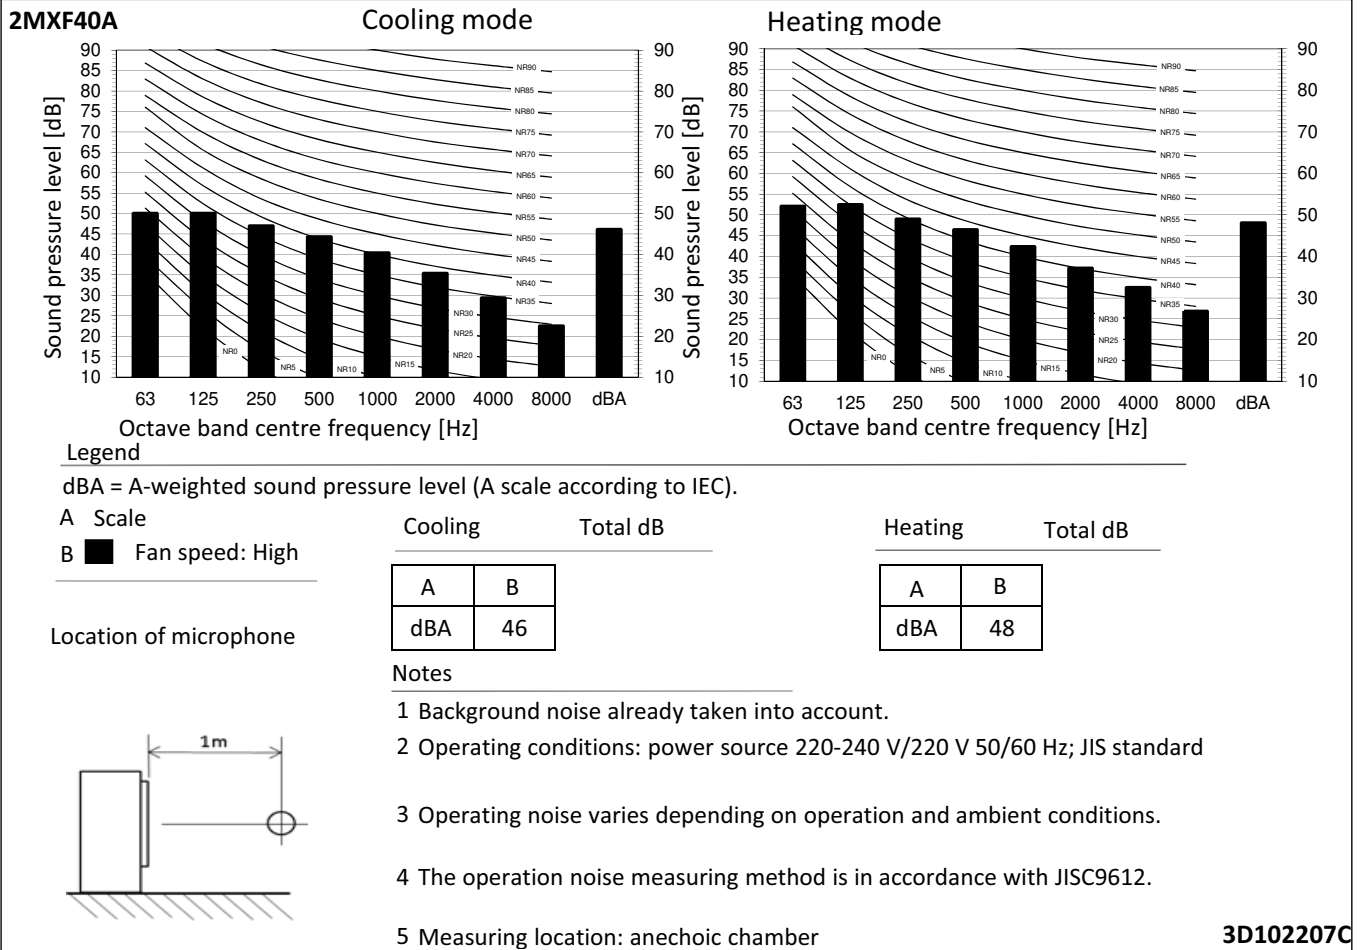

3D102207C


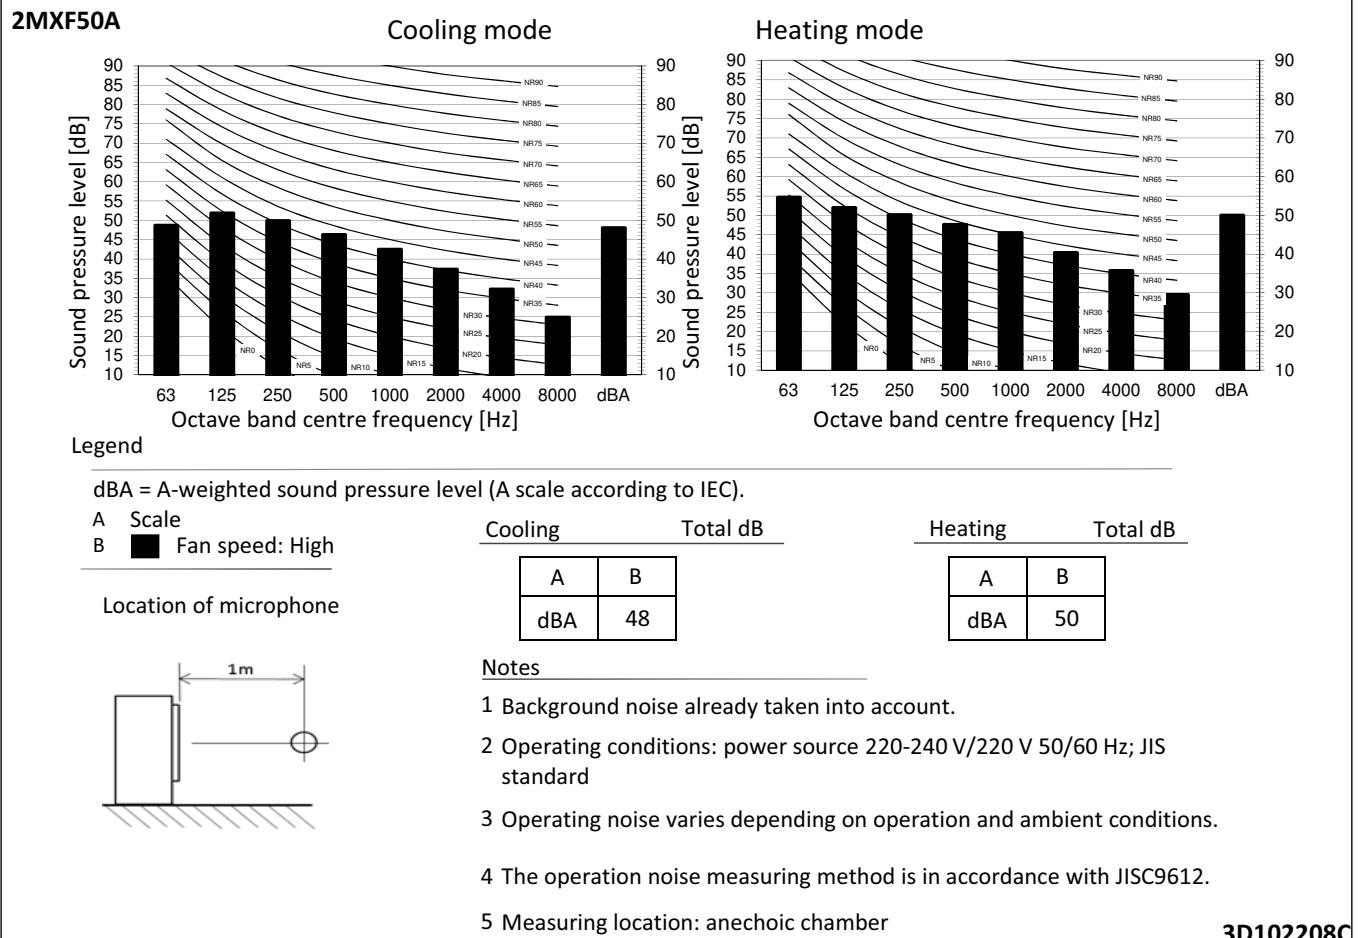


3D102208C

11 Operation range

11 - 1 Operation Range

2MXF-A

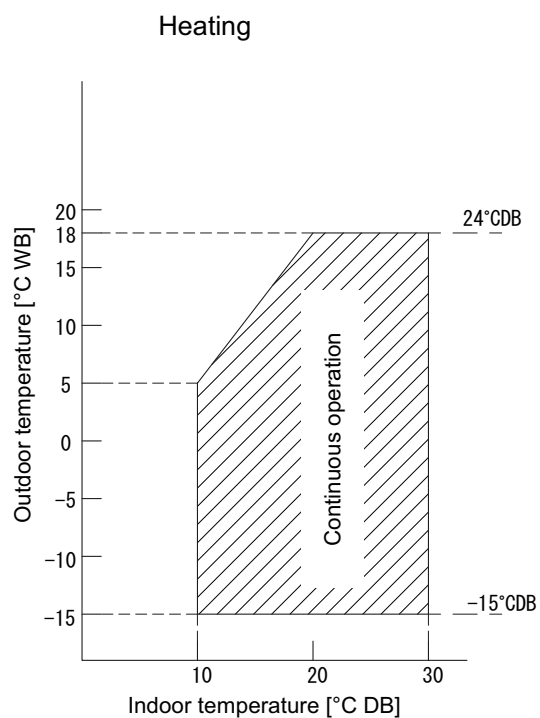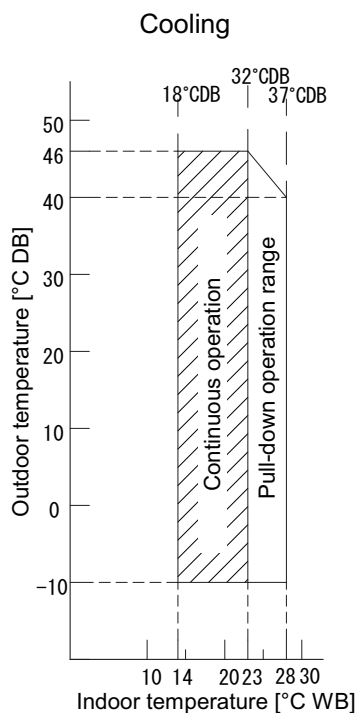


Notes

- The graph is based on the following conditions.
 Corresponding refrigerant piping length: 5 m
 Level difference: 0 m
 Air flow rate High

3D101376D

Daikin Europe N.V. Naamloze Vennootschap - Zandvoordestraat 300, B-8400 Oostende - Belgium - www.daikin.eu - BE 0412 120 336 - RPR Oostende



EEEN20A 02/20



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.