4 Dimensional drawings
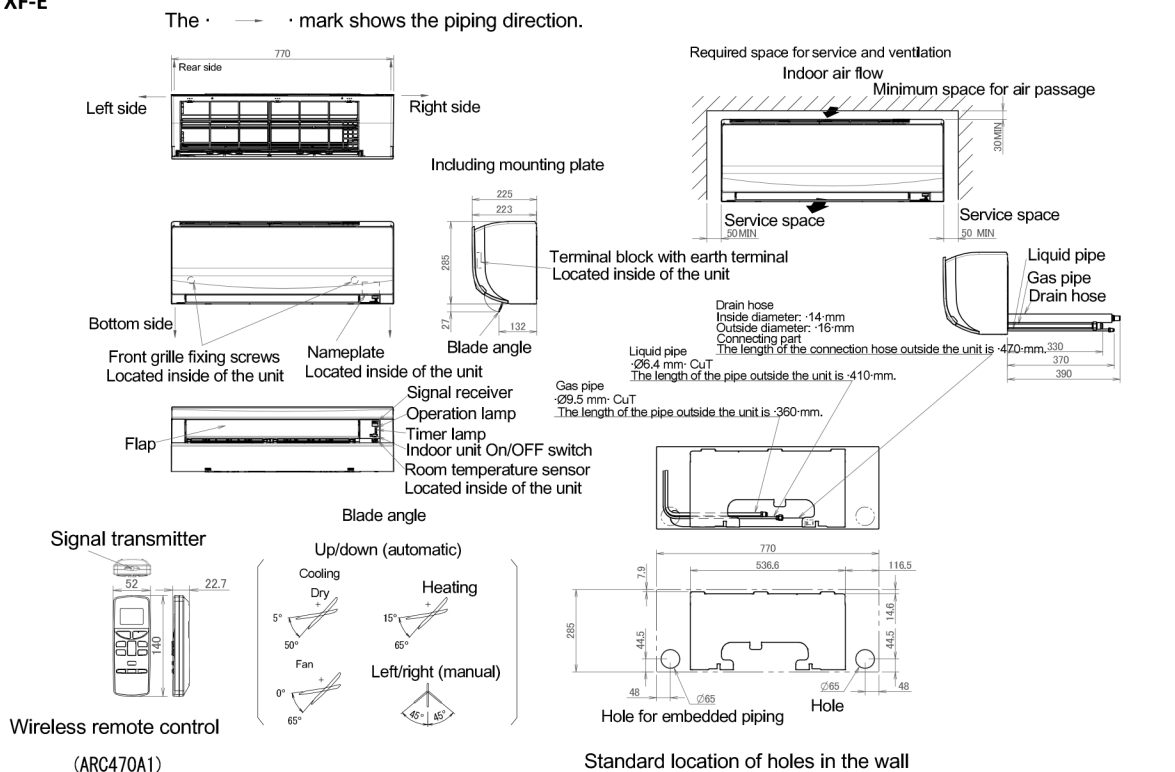
4 - 1 Dimensional Drawings

ATXF-E
FTXF-E

The · ⟶ · mark shows the piping direction.

770
Rear side
Left side
Right side

Including mounting plate

225
223
285
27
132

Bottom side

Front grille fixing screws
Located inside of the unit

Nameplate
Located inside of the unit

Blade angle

Terminal block with earth terminal
Located inside of the unit

Signal receiver
Operation lamp
Timer lamp
Indoor unit On/OFF switch
Room temperature sensor
Located inside of the unit

Flap

Blade angle

Signal transmitter

52   22.7
140

Wireless remote control

（ARC470A1）

Blade angle
Up/down (automatic)

Cooling
Dry
5°
50°

Heating
15°
65°

Fan
0°
65°

Left/right (manual)
45° 45°

Required space for service and ventilation
Indoor air flow
Minimum space for air passage
30 MIN

Service space
50 MIN
Service space
50 MIN

Drain hose
Inside diameter: 14 mm
Outside diameter: 16 mm
Connecting part
The length of the connection hose outside the unit is 470 mm.

Liquid pipe
Ø6.4 mm CuT
The length of the pipe outside the unit is 410 mm.

Gas pipe
Ø9.5 mm CuT
The length of the pipe outside the unit is 360 mm.

Liquid pipe
Gas pipe
Drain hose

330
370
390

770
536.6
116.5
7.9
14.6
285
44.5
44.5

48   Ø65   Ø65   48
Hole for embedded piping   Hole

Standard location of holes in the wall

3D113368