


4 Dimensional drawings


4 - 1 Dimensional Drawings

FTXJ-AB
FTXJ-AS
FTXJ-AW

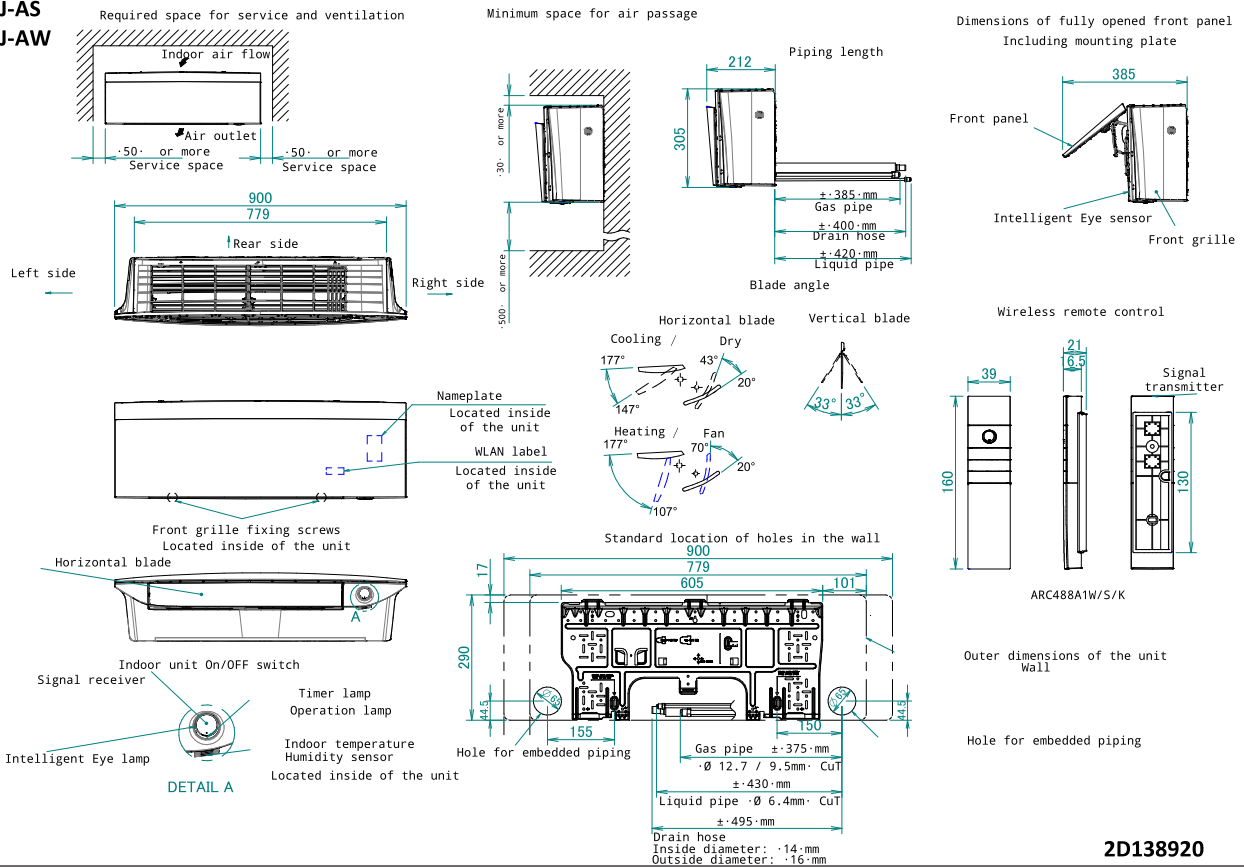


2D138920

FTXJ-AB
FTXJ-AS
FTXJ-AW

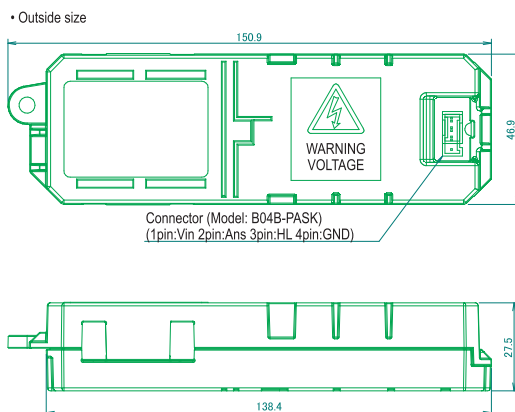

Don't blockage the vent of streamer unit.
Ensure the exit wind speed 0.2m/sec of the vent.
Ensure the spatial distance 8.5mm over at the vent of streamer unit.

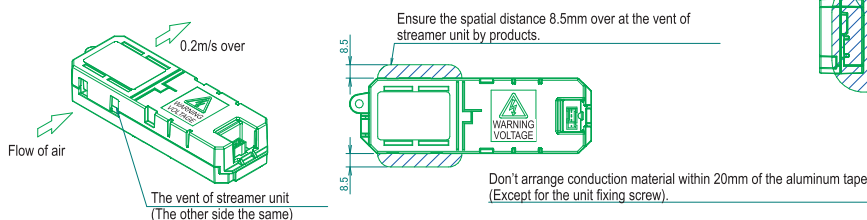

3D095530G

Main specifications

Items	Contents
Outside	Outside size 150.9×46.9×27.5mm
	Weight 100g
Material of resin	Material ABS
	Flame retardance UL94-5VA
	Tracking index Over CTI600V
Applicable laws	Electrical Appliance and Material Safety Act IEC60335-1(4th), IEC60335-2-65(4th)
Ambient conditions	Storage temperature -25~70 (Non-Energization)
	Operating ambient temperature -10~60 (Energization)
	Operating ambient humidity 5~95%RH (No dew deposit)
Basic specifications	Input voltage 14V±5%
	Maximum output voltage 6.5±0.5kV
	Rating output voltage 5.0±0.5kV
	Rating output current Hi 55.5μA±10% Lo 10μA±10%
	ON/OFF Inputted voltage into Vin (ON/OFF)
	Hi ↔ Lo Switching Inputted 5V into HL (Loe tap)
	Current monitor Yes
	Detectable over current Yes
	Detectable low voltage Under 3kV
Generation amount of Ozone	4.26ml/hr (Hi 14±2; 50±10%RH)
Method of mounting	Fixing by the right and left hook Fixing by the screw section