



Ceiling suspended unit

For wide rooms with no false ceilings nor free floor space

- Optimised design for R-32 refrigerant
- Ideal for comfortable air flow in wide rooms thanks to Coanda effect: up to 100° discharge angle




- Even rooms with ceilings up to 3.8m can be heated up or cooled down very easily without capacity loss
- Can easily be installed in both new and refurbishment projects
- Can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space

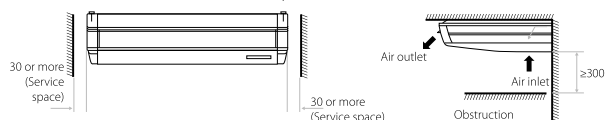

- Fresh air intake integrated in the same system thus reducing installation cost as no additional ventilation device is required

Fresh air intake opening in casing



* Brings in up to 10% of fresh air into the room

- Stylish unit blends easily with any interior. The flaps close entirely when the unit is not operating.




Home leave operation



FXHA50-63A



BRC1H52W, BRP069C51



amazon alexa

works with the Google Assistant



FXHA-A

Indoor Unit				FXHA	32A	50A	63A	100A
Cooling capacity	Total capacity	At high fan speed		kW	3.6	5.6	7.1	11.2
	Nom.			kW	3.6	5.6	7.1	11.2
Heating capacity	Total capacity	At high fan speed		kW	4.0	6.3	8.0	12.5
	Nom.			kW	4.0	6.3	8.0	12.5
Power input - 50Hz	Cooling	At high fan speed		kW	0.033	0.037	0.051	0.086
	Heating	At high fan speed		kW	0.033	0.037	0.051	0.086
Dimensions	Unit	HeightxWidthxDepth		mm	235x960x690		235x1,270x690	
Weight	Unit			kg	28		36	
Casing	Material				Resin, sheet metal			
Fan	Air flow rate - 50Hz	Cooling	At high / medium / low fan speed	m³/min	12.5/11.0/10.0	16.0/14.0/12.5	17.5/15.0/13.0	27.0/22.0/19.0
		Heating	At high / medium / low fan speed	m³/min	12.5/11.0/10.0	16.0/14.0/12.5	17.5/15.0/13.0	27.0/22.0/19.0
Air filter	Type				Resinnet			
Sound power level	Cooling	At high / medium / low fan speed		dBA	54.0/52.0/49.0	54.0/52.0/50.0	55.0/53.0/52.0	62.0/55.0/52.0
Sound pressure level	Cooling	At high / medium / low fan speed		dBA	36.0/34.0/31.0	36.5/34.5/33.0	37.0/35.0/34.0	44.0/37.0/34.0
	Heating	At high / medium / low fan speed		dBA	36.0/34.0/31.0	36.5/34.5/33.0	37.0/35.0/34.0	44.0/37.0/34.0
Refrigerant	Type/GWP				R-32/675			
Piping connections	Liquid	OD	mm		6.35		9.52	
	Gas	OD	mm	9.52	12.7		15.9	
	Drain				VP20			
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/60/220-240/220			
Current - 50Hz	Maximum fuse amps (MFA)			A	6			
Control systems	Infrared remote control				BRC7GA56 / BRC7GA53-9			
	Wired remote control				BRC1H52W/S/K / BRC1H82W/S/K			

Contains fluorinated greenhouse gases