


Concealed ceiling unit with medium ESP Air Conditioning Technical Data FXSN-B

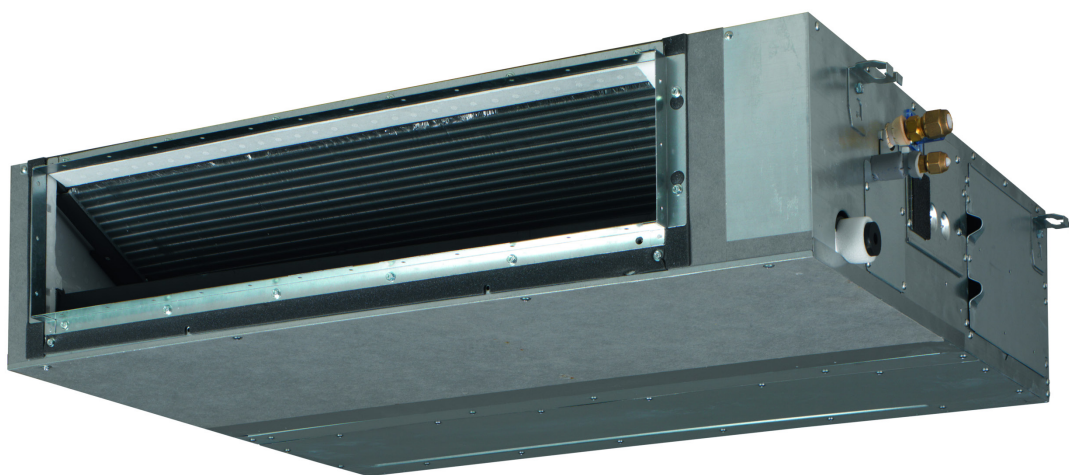

FXSN40B2VEB
FXSN50B2VEB
FXSN63B2VEB
FXSN80B2VEB

TABLE OF CONTENTS

FXSN-B

1	Features	4
	FXSN-B	4
2	Specifications	5
3	Safety device settings	7
4	Options	8
5	Capacity tables	9
	Cooling/Heating Capacity Tables	9
6	Dimensional drawings	10
7	Centre of gravity	11
8	Piping diagrams	13
9	Wiring diagrams	14
	Wiring Diagrams - Single Phase	14
10	Sound data	15
	Sound Power Spectrum	15
	Sound Pressure Spectrum	17
11	Fan characteristics	19
12	Installation	21
	Installation Method	21


1 Features

1 - 1 FXSN-B

Slimmest yet most powerful medium static pressure unit on the market

1

- › Optimised design for CO2 refrigerant (R-744)
- › Slimmest unit in class, only 245mm (300mm built-in height) and therefore narrow ceiling voids are no longer a challenge
- › Medium external static pressure up to 120Pa facilitates using flexible ducts of varying lengths
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Discretely concealed in the wall: only the suction and discharge grilles are visible
- › Optional fresh air intake
- › Flexible installation: air suction direction can be altered from rear to bottom suction and choice between free use or connection to optional suction grilles
- › Standard built-in drain pump with 625mm lift increases flexibility and installation speed

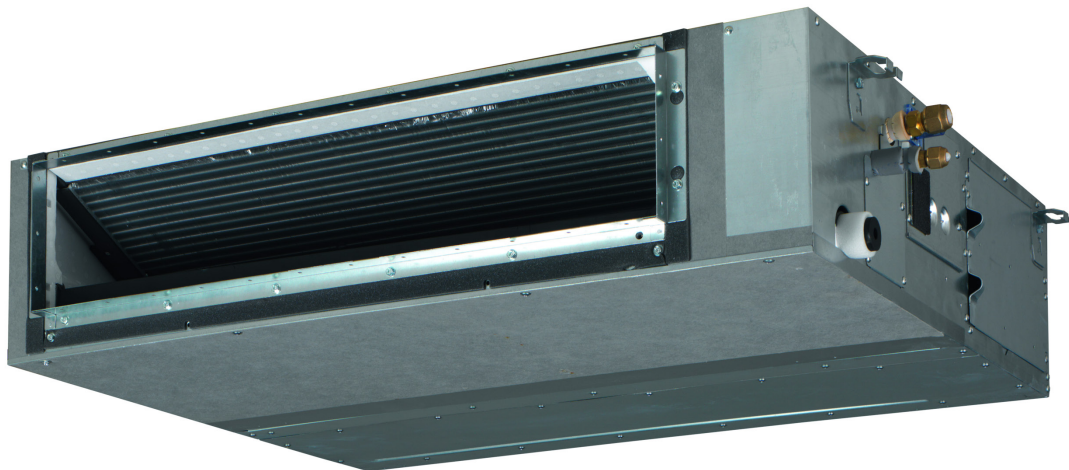

Onecta app
(optional)
(optional)



Home leave
operation



Fan only



Auto cooling-
heating
changeover
(heat pump)



Whisper quiet



Fan speed
steps
(3 steps +
auto)



Dry
programme



Air filter
(pre filter)



Weekly timer
(optional)



Infrared
remote control
(optional)



Wired remote
control



Centralised
control
(optional)



Auto-restart



Self diagnosis



Drain pump
kit
(standard)

2 Specifications

2 - 1 Specifications

Technical specifications				FXSN40B		FXSN50B		FXSN63B		FXSN80B				
Cooling capacity	Sensible capacity	At high fan speed		kW	3.1		4.0		5.1		6.5			
		At medium fan speed		kW	2.7		3.4		4.2		5.4			
		At low fan speed		kW	2.3		2.9		3.4		3.9			
	Latent capacity	At high fan speed		kW	1.4		1.6		2.0		2.5			
		At medium fan speed		kW	1.2		1.3		1.6		2.1			
		At low fan speed		kW	1.1		1.3		1.3		1.5			
	Total capacity	At high fan speed		kW	4.50		5.60		7.10		9.00			
		At medium fan speed		kW	3.90		4.70		5.80		7.50			
At low fan speed		kW	3.40		4.00		4.70		5.40					
Heating capacity	Total capacity	At high fan speed		kW	5.0		6.3		8.0		10.0			
		At medium fan speed		kW	4.2		5.1		6.3		8.3			
		At low fan speed		kW	3.6		4.1		5.0		5.9			
Power input - 50Hz	Cooling	At high fan speed		kW	0.128		0.165		0.148		0.279			
		At medium fan speed		kW	0.086		0.106		0.100		0.181			
		At low fan speed		kW	0.057		0.066		0.069		0.098			
	Heating	At high fan speed		kW	0.128		0.179		0.160		0.313			
		At medium fan speed		kW	0.086		0.113		0.109		0.202			
		At low fan speed		kW	0.057		0.042		0.074		0.133			
Power input - 60Hz	Cooling	At high fan speed		kW	0.128		0.165		0.148		0.279			
	Heating	At high fan speed		kW	0.128		0.179		0.160		0.313			
Dimensions	Unit	Height	mm					245						
		Width	mm	1,000				1,400						
		Depth	mm					800						
	Packed unit	Height	mm					890						
		Width	mm	1,200				1,600						
		Depth	mm					295						
Weight	Unit			kg	40				50					
	Packed unit			kg	42				53					
Casing	Colour				Not painted (galvanised)									
	Material				Galvanised steel plate									
Required ceiling void >				mm					300					
Heat exchanger	Inside length		mm	792				1,192						
	Rows	Quantity						3						
	Fin pitch		mm					1.40						
	Passes	Quantity		11				12						
	Face area		m²	0.288				0.433						
Heat exchanger	Stages	Quantity						26						
	Empty tubeplate hole	Quantity						0						
	Tube type						5Bare t0.46							
	Fin	Type						Multi slit fin						
Fan	Type								Sirocco fan					
	Quantity				2				3					
	Air flow rate - 50Hz	Cooling	At high fan speed		m³/min	23.0		25.0		29.4		37.6		
			At medium fan speed		m³/min	19.5		20.5		25.0		32.0		
			At low fan speed		m³/min	16.0		17.0		21.1		26.9		
		Heating	At high fan speed		m³/min	23.0		27.0		31.9		41.8		
			At medium fan speed		m³/min	19.5		22.5		27.0		35.7		
			At low fan speed		m³/min	16.0		18.0		23.1		30.3		
	Air flow rate - 60Hz	Cooling	At high fan speed		cfm	812		883		1,038		1,328		
			At medium fan speed		cfm	689		724		883		1,128		
			At low fan speed		cfm	565		600		745		949		
		Heating	At high fan speed		cfm	812		953		1,127		1,474		
			At medium fan speed		cfm	689		795		953		1,260		
			At low fan speed		cfm	565		636		814		1,069		
	External static pres- sure - 50Hz	Factory set	Pa						30					
		High	Pa						120					
	External static pres- sure - 60Hz	Factory set	Pa						30					
High		Pa						120						
Fan motor	Drive				Variable speed drive (VSD)									
Sound power level	Cooling	At high fan speed		dBA	61.0		63.0		61.0		66.0			
		At medium fan speed		dBA	58.5		60.5		58.5		63.5			
		At low fan speed		dBA	56.0		58.0		56.0		61.0			
	Heating	At high fan speed		dBA	63.0		66.0		66.0		70.0			
		At medium fan speed		dBA	60.5		63.5		63.5		67.0			
		At low fan speed		dBA	58.0		61.0		61.0		64.0			

2 Specifications

2 - 1 Specifications

2

Technical specifications					FXSN40B	FXSN50B	FXSN63B	FXSN80B
Sound pressure level	Cooling	At high fan speed	dB(A)		39.0	41.0	39.0	44.0
		At medium fan speed	dB(A)		36.5	38.5	36.5	41.5
		At low fan speed	dB(A)		34.0	36.0	34.0	39.0
	Heating	At high fan speed	dB(A)		41.0	44.0		48.0
		At medium fan speed	dB(A)		38.5	41.5		45.0
		At low fan speed	dB(A)		36.0	39.0		42.0
Fan motor	Quantity					1		
	Speed	Steps				3		
Fan motor	Speed	Cooling	High	rpm	1,207	1,272	1,130	1,348
			Low	rpm	889	915	847	1,011
		Heating	High	rpm	1,207	1,320	1,170	1,437
			Low	rpm	889	949	877	1,078
	Output	Max		W	230		300	
Refrigerant	Type					R-744		
	GWP					1.0		
Piping connections	Liquid	Type				Braze connection		
		OD		mm		9.52		
	Gas	Type				Braze connection		
		OD		mm		12.7		
	Drain					VP20 (I.D. 20/O.D. 26), drain height 625 mm		
	Heat insulation					Foamed polystyrene / Foamed polyethylene		
Sound absorbing insulation						Butyl Rubber		
Air filter	Type					Resin net		
Safety devices	Item	01				PC board fuse		
		02				Fan motor overcurrent protector		
		03				Fan motor thermal protection		
Control systems	Infrared remote control					BRC4C65 / BRC4C66		
	Wired remote control					BRC1H52W/S/K		

Standard accessories: Washer for hanger bracket;Quantity: 1;

Standard accessories: Clamps;Quantity: 4;

Standard accessories: Drain hose;Quantity: 1;

Standard accessories: Installation and operation manual;Quantity: 1;

Standard accessories: Insulation for fitting;Quantity: 2;

Standard accessories: Metal clamp for drain hose;Quantity: 1;

Standard accessories: Screws;Quantity: 40;

Standard accessories: Sealing pad;Quantity: 5;

Electrical specifications					FXSN40B	FXSN50B	FXSN63B	FXSN80B
Power supply	Name					VE		
	Phase					1~		
	Frequency	Hz				50/60		
	Voltage	V				220-240/220		
Current - 50Hz	Minimum circuit amps (MCA)	A			1.5	1.8	2.1	2.6
	Maximum fuse amps (MFA)	A				6		
	Full load amps (FLA) Total	A			1.4	1.6	1.9	2.4
Current - 60Hz	Minimum circuit amps (MCA)	A			1.5	1.8	2.1	2.6
	Maximum fuse amps (MFA)	A				6		
	Full load amps (FLA) Total	A			1.4	1.6	1.9	2.4

Values are valid for the factory setting. |

Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 5m; level difference: 0m |

Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m; level difference: 0m |

Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat. |

External static pressure is changeable to set by the remote control (from standard to high, see installation manual) |

Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits. |

Maximum allowable voltage range variation between phases is 2%. |

MCA/MFA: MCA = 1.1 x FLA |

Instead of a fuse, use a circuit breaker |

Select wire size based on the value of MCA |

Contains fluorinated greenhouse gases

3 Safety device settings

3 - 1 Safety Device Settings

3

FXSN-B

	Safety devices	40	50	63	80
FXSN	Printed circuit board (main)	250V, 3.15A	250V, 3.15A	250V, 3.15A	250V, 3.15A
	Printed circuit board (fan)	250V, 6.3A	250V, 6.3A	250V, 6.3A	250V, 6.3A
	Printed circuit board (main)	250V, 3.15A	250V, 3.15A	250V, 3.15A	250V, 3.15A

4D156047

4 Options

4 - 1 Options

4

FXSN-B

Option kit	Product name	FXSN40/50B2VEB	FXSN63/80B2VEB
Wired remote control	BRC1H52W/S/K	✓	✓
Central remote control	DCS302C51	✓	✓
Unified ON/OFF controller	DCS301B51	✓	✓
Intelligent Touch Manager	DCM601B51	✓	✓
Intelligent Tablet Controller	DCM601A51	✓	✓
Wireless room thermostat	K.RSS ①	✓	✓
PCB for multi-tenant indoor units	DTA114A61-9 ②③	✓	✓
WLAN adaptor for smartphones	BRP069C51	✓	✓
Air discharge adaptor for round ducts	KDAP25A71A	✓	
	KDAP25A140A		✓
Wiring adaptor for electrical appendices	KRP4A52 ②③	✓	✓
	KRP4A51 ②③	✓	✓
	EKRP1C14 ②③	✓	✓
Wireless remote control -H/P-	BRC4C65, BRC4C66	✓	✓
Remote sensor	KRCS01-6B	✓	✓
Electrical box with earth terminal (-3- blocks)	KJB311A	✓	✓
Electrical box with earth terminal (-2- blocks)	KJB212A	✓	✓
Electrical box with earth terminal	KJB411A	✓	✓
External adaptor for outdoor unit (installation on indoor unit)	DTA104A61 ②③	✓	✓
Installation box for adaptor PCB	KRP1BC101	✓	✓
Digital input adaptor	BRP7A51 ②③④	✓	✓
Wire harness for external wireless temperature sensor	EKEWTSC-1 ①	✓	✓
Daikin Cloud Plus with Edge	DGE601A51, DGE602A51	✓	✓
BACnet interface	DMSS02B51	✓	✓

Notes

- ① -EKEWTSC-1- is a wire harness for the connection of option -K.RSS-.
- K.RSS- is not an official option. Sales for this option are an SBU responsibility.
- ② Maximally -2- optional PCBs can be mounted.
- ③ This option needs to be installed together with installation box -KRP1BC101-.
- ④ Only possible in combination with remote control -BRC1H52K/S/W-.

3D157187

5 Capacity tables

5 - 1 Cooling/Heating Capacity Tables

FXSN-B

Cooling

		Indoor air temperature													
Unit size	Fan speed	14.0 [°C WB]		16.0 [°C WB]		18.0 [°C WB]		19.0 [°C WB]		20.0 [°C WB]		22.0 [°C WB]		24.0 [°C WB]	
		20.0 [°C DB]		23.0 [°C DB]		26.0 [°C DB]		27.0 [°C DB]		28.0 [°C DB]		30.0 [°C DB]		32.0 [°C DB]	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
40	H	2.5	2.1	3.3	2.6	4.1	3.0	4.5	3.1	4.9	3.2	5.8	3.5	6.8	3.7
	M	Correction factor -0.87 × H-													
	L	Correction factor -0.76 × H-													
50	H	3.2	2.7	4.1	3.2	5.1	3.7	5.6	4.0	6.1	4.1	7.2	4.3	8.4	4.6
	M	Correction factor -0.84 × H-													
	L	Correction factor -0.71 × H-													
63	H	4.0	3.3	5.2	4.0	6.5	4.7	7.1	5.1	7.7	5.1	9.2	5.5	10.8	5.9
	M	Correction factor -0.82 × H-													
	L	Correction factor -0.66 × H-													
80	H	5.1	4.3	6.6	5.2	8.2	6.0	9.0	6.5	9.8	6.5	11.6	7.0	13.6	7.5
	M	Correction factor -0.83 × H-													
	L	Correction factor -0.60 × H-													

Notes

- 1) TC: Total capacity [kW]
SHC: Sensible heat capacity [kW]
H: High
M: Medium
L: Low

- 2) Outdoor temperature -35°C DB

Heating

Unit size	Fan speed	Indoor air temperature					
		16.0 [°C DB]		18.0 [°C DB]		20.0 [°C DB]	
		21.0 [°C DB]		22.0 [°C DB]		24.0 [°C DB]	
		TC	TC	TC	TC	TC	TC
40	H	6.3	5.6	5.0	4.7	4.4	3.7
	M	Correction factor -0.84 × H-					
	L	Correction factor -0.72 × H-					
50	H	7.9	7.1	6.3	5.9	5.5	4.7
	M	Correction factor -0.81 × H-					
	L	Correction factor -0.65 × H-					
63	H	10.0	9.0	8.0	7.5	7.0	6.0
	M	Correction factor -0.79 × H-					
	L	Correction factor -0.63 × H-					
80	H	12.5	11.3	10.0	9.4	8.7	7.4
	M	Correction factor -0.83 × H-					
	L	Correction factor -0.59 × H-					

Notes


- 1) TC: Total capacity [kW]
H: High
M: Medium
L: Low
- 2) Outdoor temperature -7°C DB / -6°C WB

4D156866

6 Dimensional drawings

6 - 1 Dimensional Drawings

FXSN40-50B

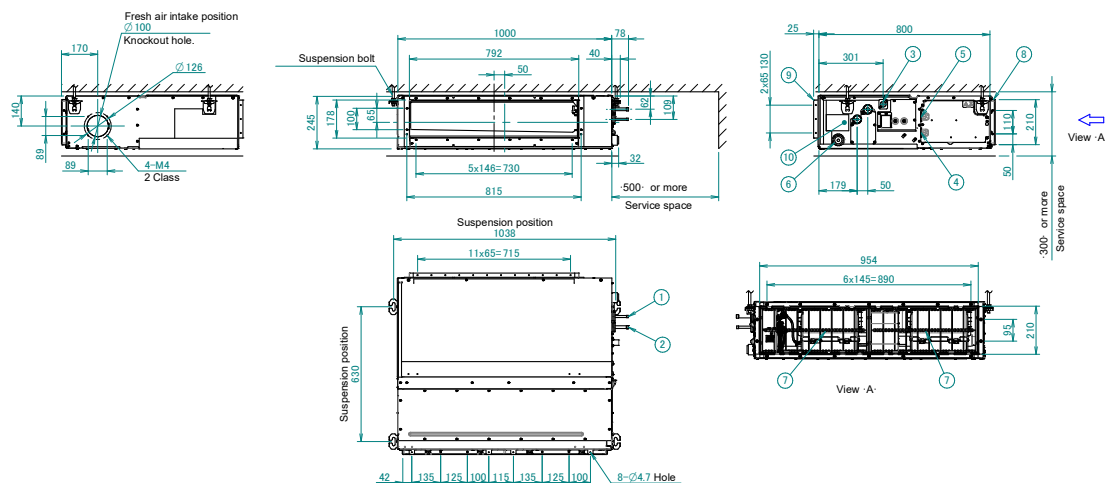


Notes

1. When installing optional accessories, refer to their respective documentation.
2. The ceiling depth varies according to the documentation of the specific system.

Item	Name	Description
①	Liquid pipe connection port	Ø9.52" flared connection
②	Gas pipe connection port	Ø12.70" flared connection
③	Drain pipe connection	VP-20 (ID: 20" x OD: 26")
④	Wiring connection	/
⑤	Power supply connection	/
⑥	Drain outlet	VP-20 (ID: 20" x OD: 26")
⑦	Air filter	/
⑧	Air suction side	/
⑨	Air discharge side	/
⑩	Nameplate	/

3D156333

FXSN630-80B

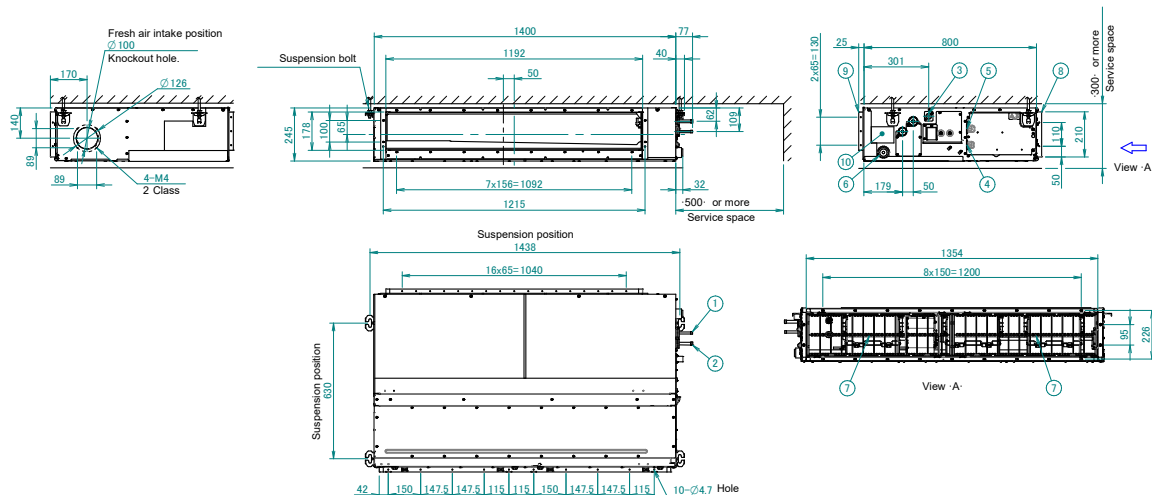

Notes

1. When installing optional accessories, refer to their respective documentation.
2. The ceiling depth varies according to the documentation of the specific system.


Item	Name	Description
①	Liquid pipe connection port	Ø9.52" flared connection
②	Gas pipe connection port	Ø12.70" flared connection
③	Drain pipe connection	VP-20 (ID: 20" x OD: 26")
④	Wiring connection	/
⑤	Power supply connection	/
⑥	Drain outlet	VP-20 (ID: 20" x OD: 26")
⑦	Air filter	/
⑧	Air suction side	/
⑨	Air discharge side	/
⑩	Nameplate	/

3D156396

7 Centre of gravity

7 - 1 Centre of Gravity

FXSN40-50B

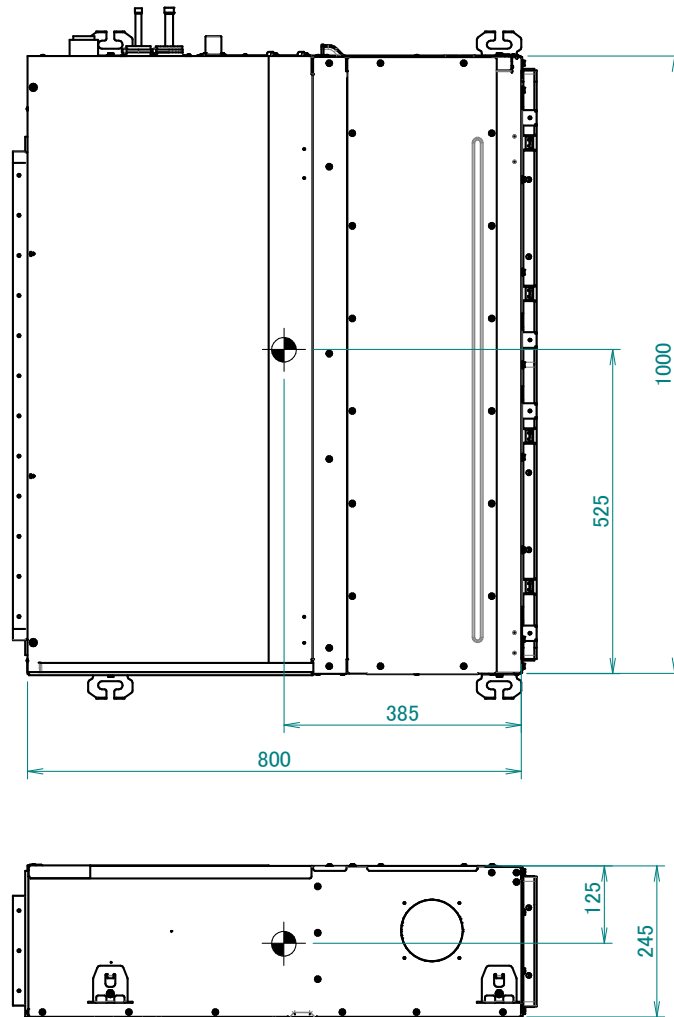


4D156300

7 Centre of gravity

7 - 1 Centre of Gravity

7

FXSN63-80B

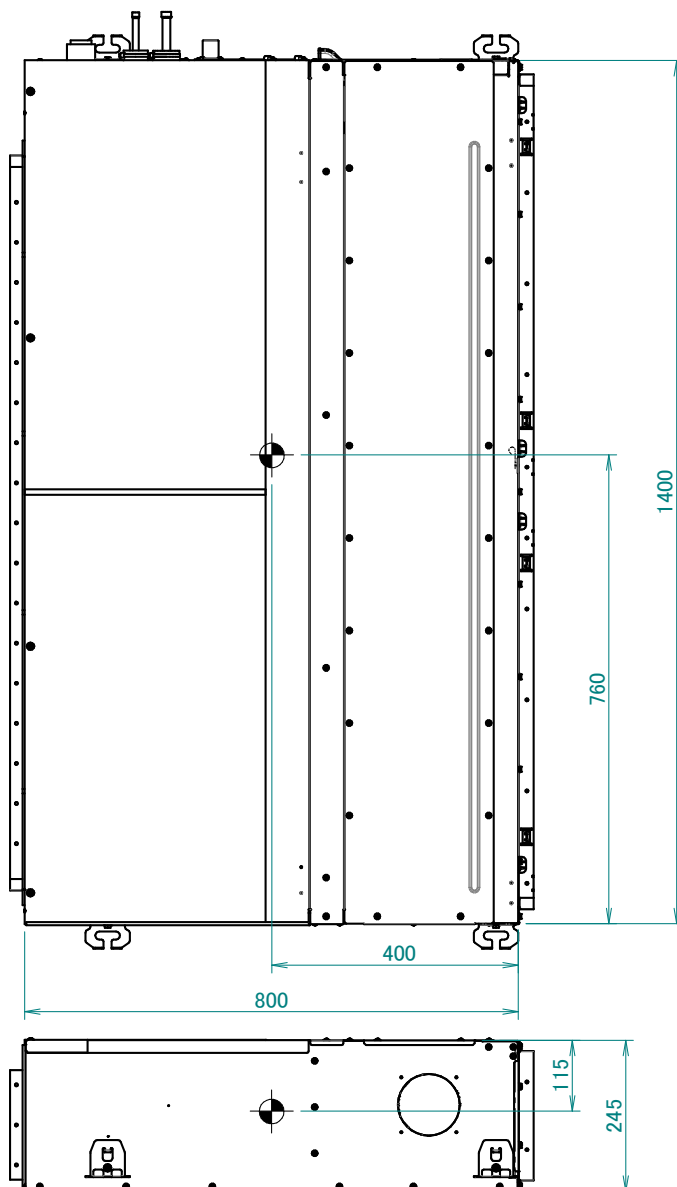


4D156299

8 Piping diagrams

8 - 1 Piping Diagrams

FXSN-B

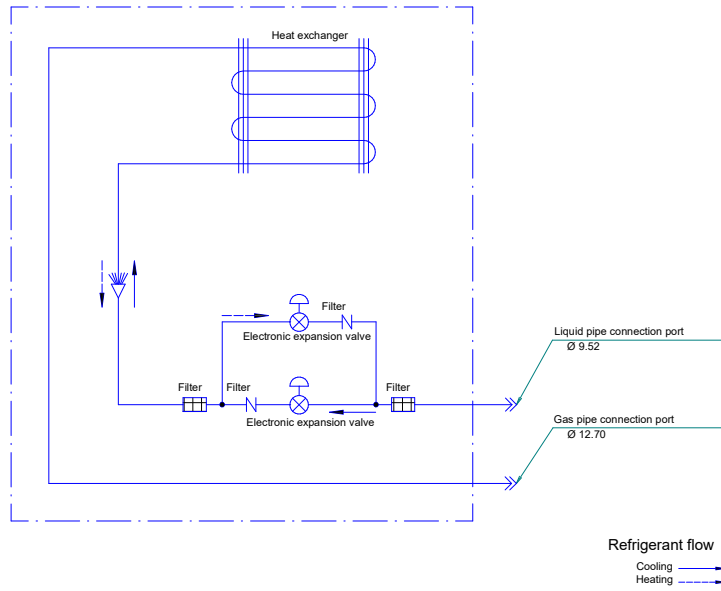


Notes
1. Editable data for this drawing are available in the 'GDE (E-BOM)' system.

3D156445

9 Wiring diagrams

9 - 1 Wiring Diagrams - Single Phase

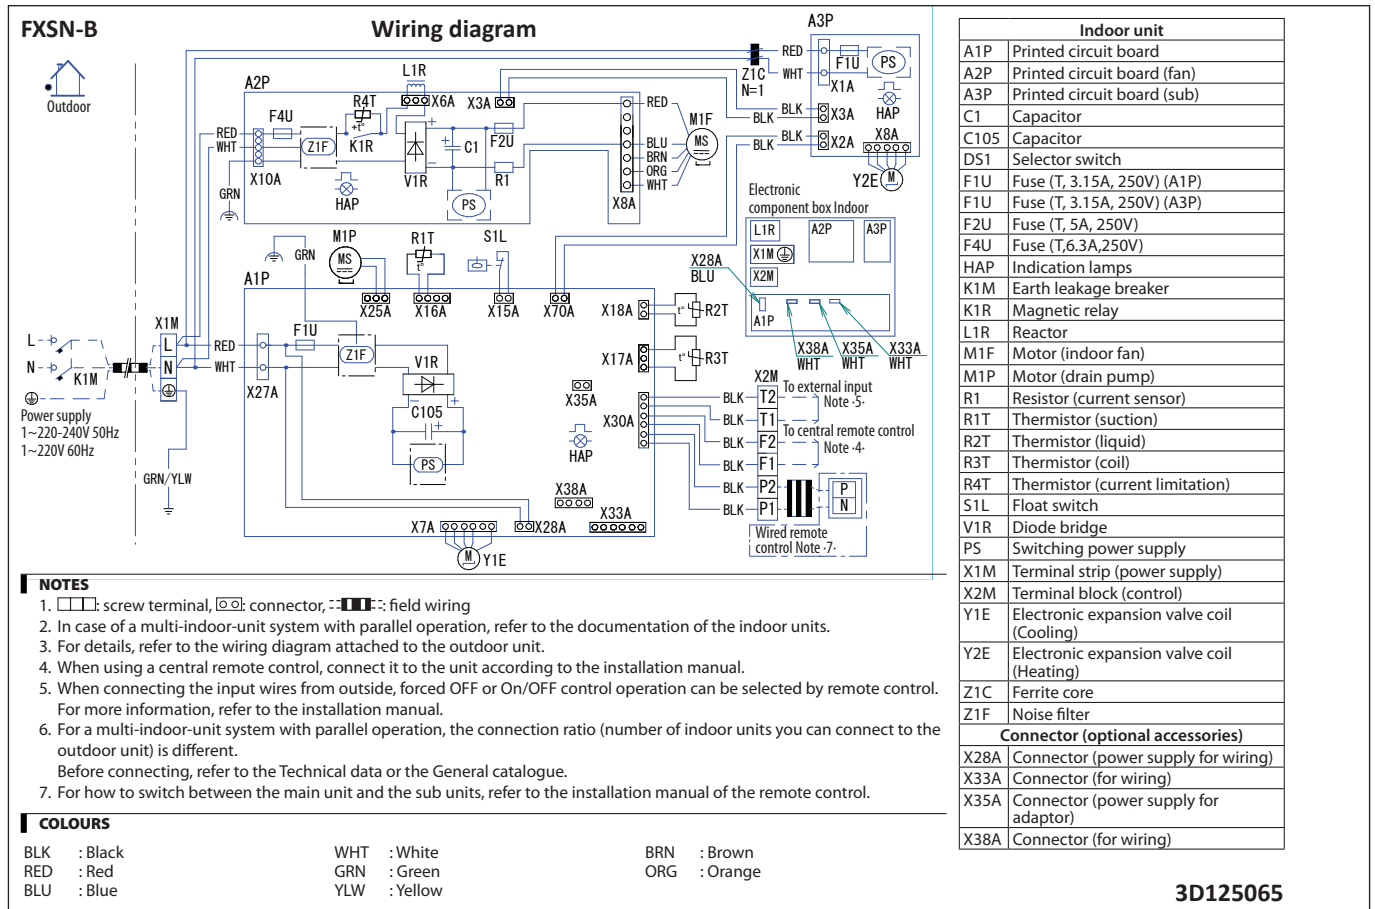


10 Sound data


10 - 1 Sound Power Spectrum

FXSN40B

Cooling mode

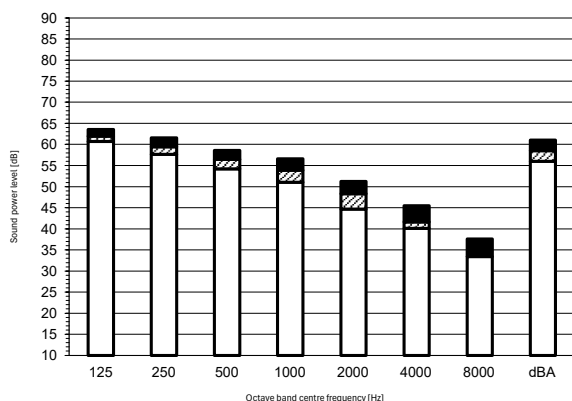

Heating mode

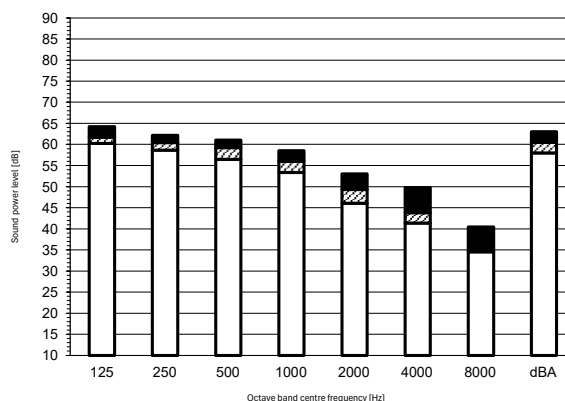

Legend

- A Scale
- B Fan speed: High
- C Fan speed: Medium
- D Fan speed: Low

Notes

- 1) dBA = A-weighted sound power level (A scale according to IEC).
- 2) Reference acoustic power 0 dB = 10^{-6} W
- 3) Measured according to ISO 3744


Cooling				Total dB
A	B	C	D	
dBA	61,0	58,5	56,0	

Heating				Total dB
A	B	C	D	
dBA	63,0	60,5	58,0	


4D156889

FXSN50B

Cooling mode

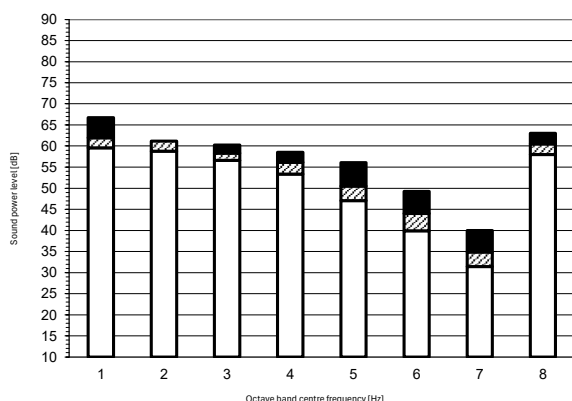

Heating mode

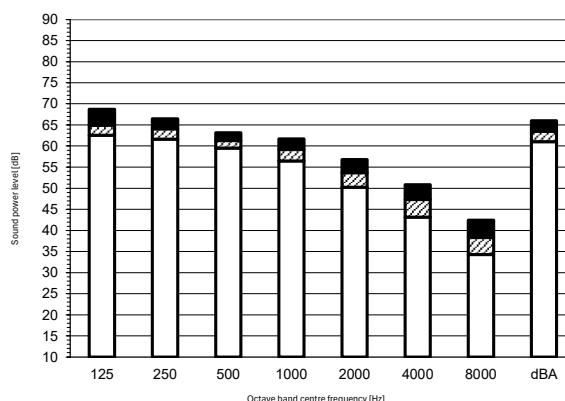

Legend

- A Scale
- B Fan speed: High
- C Fan speed: Medium
- D Fan speed: Low

Notes

- 1) dBA = A-weighted sound power level (A scale according to IEC).
- 2) Reference acoustic power 0 dB = 10^{-6} W
- 3) Measured according to ISO 3744

Cooling				Total dB
A	B	C	D	
dBA	63,0	60,5	58,0	

Heating				Total dB
A	B	C	D	
dBA	66,0	63,5	61,0	

4D156890


10 Sound data

10 - 1 Sound Power Spectrum


10

FXSN63B

Cooling mode

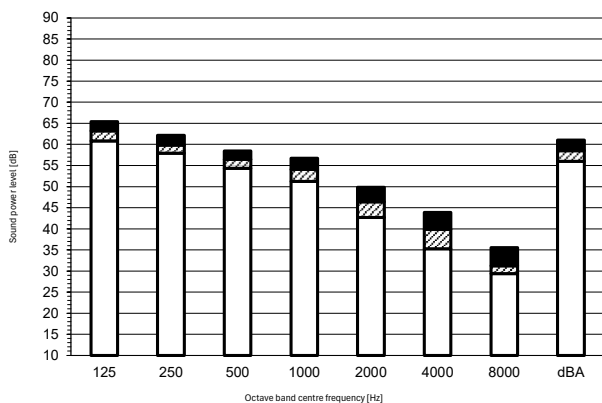

Heating mode

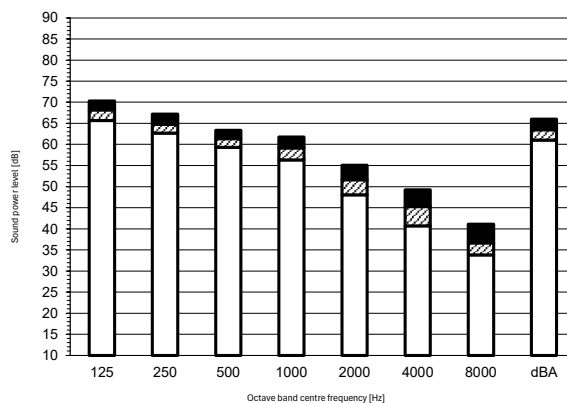

Legend

- A Scale
- B Fan speed: High
- C Fan speed: Medium
- D Fan speed: Low

Notes

- 1) dBA = A-weighted sound power level (A scale according to IEC).
- 2) Reference acoustic power 0 dB = 10^{-6} W
- 3) Measured according to ISO 3744


Cooling				Total dB
A	B	C	D	
dBA	61,0	58,5	56,0	

Heating				Total dB
A	B	C	D	
dBA	66,0	63,5	61,0	


4D156891

FXSN80B

Cooling mode

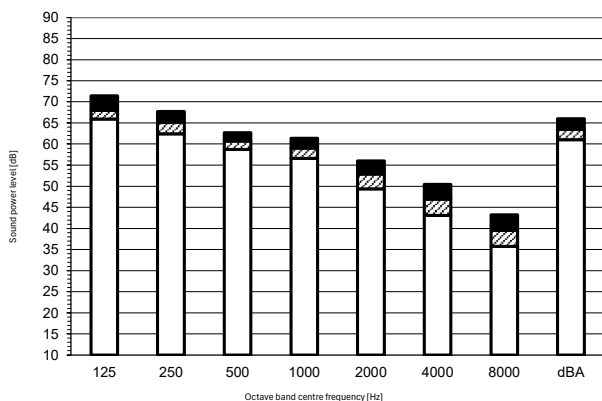

Heating mode

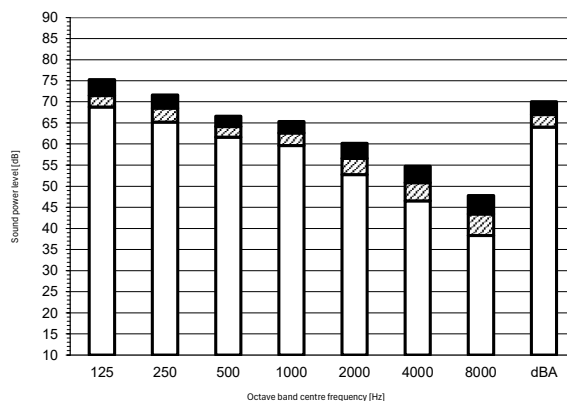

Legend

- A Scale
- B Fan speed: High
- C Fan speed: Medium
- D Fan speed: Low

Notes

- 1) dBA = A-weighted sound power level (A scale according to IEC).
- 2) Reference acoustic power 0 dB = 10^{-6} W
- 3) Measured according to ISO 3744

Cooling				Total dB
A	B	C	D	
dBA	66,0	63,5	61,0	

Heating				Total dB
A	B	C	D	
dBA	70,0	67,0	64,0	


4D156892

10 Sound data


10 - 2 Sound Pressure Spectrum

FXSN40B

Cooling mode

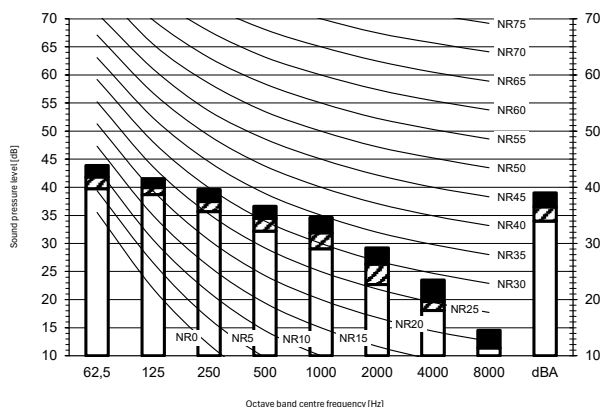

Heating mode

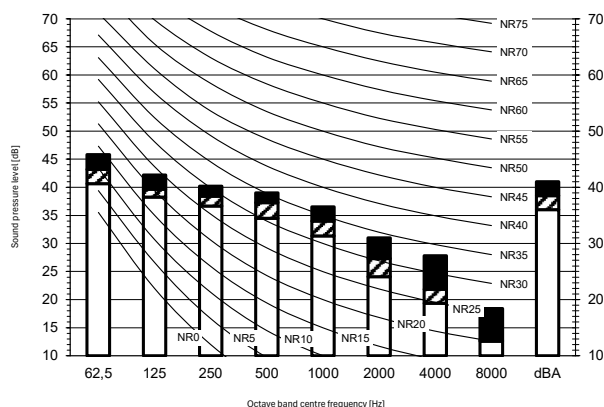

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

- A** Scale
- B** Fan speed: High
- C** Fan speed: Medium
- D** Fan speed: Low

Cooling		Total dB	
A	B	C	D
dBa	39,0	36,5	34,0

Heating		Total dB	
A	B	C	D
dBa	41,0	38,5	36,0

Location of microphone




Notes

- 1) Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 2) Background noise already taken into account.
- 3) Operating noise varies depending on operation and ambient conditions.
- 4) The operation noise measuring method is in accordance with JISC9612.
- 5) Measuring location: anechoic chamber


4D156882

FXSN50B

Cooling mode

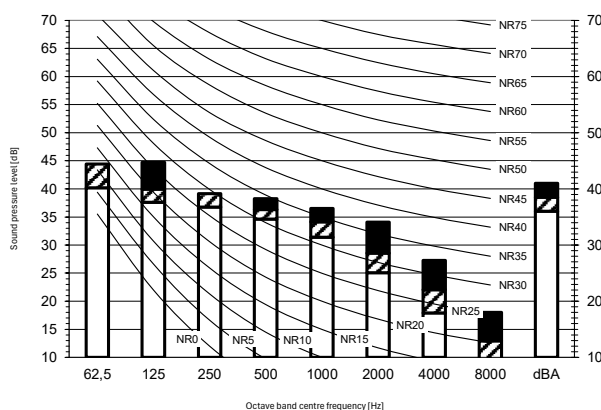

Heating mode

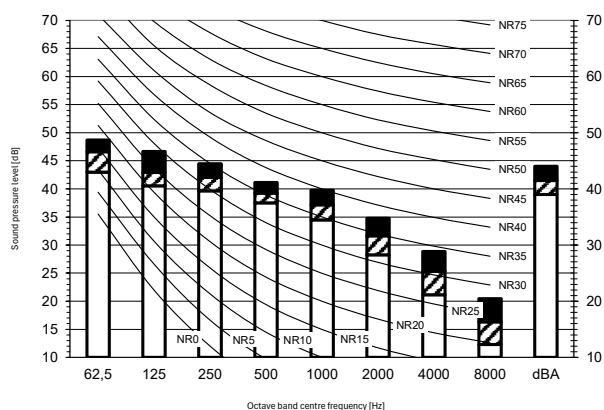

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

- A** Scale
- B** Fan speed: High
- C** Fan speed: Medium
- D** Fan speed: Low

Cooling		Total dB	
A	B	C	D
dBa	41,0	38,5	36,0

Heating		Total dB	
A	B	C	D
dBa	44,0	41,5	39,0

Location of microphone



Notes

- 1) Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 2) Background noise already taken into account.
- 3) Operating noise varies depending on operation and ambient conditions.
- 4) The operation noise measuring method is in accordance with JISC9612.
- 5) Measuring location: anechoic chamber

4D156883


10 Sound data

10 - 2 Sound Pressure Spectrum


10

FXSN63B

Cooling mode

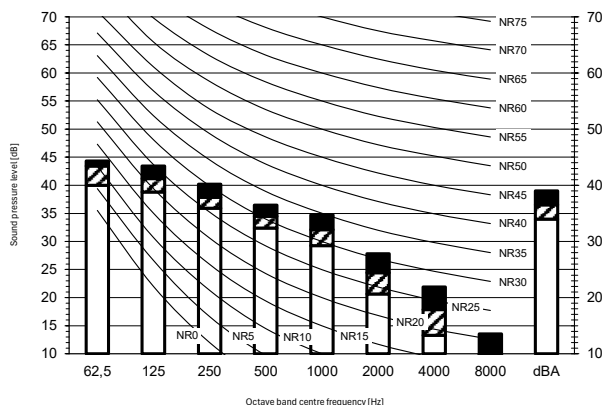

Heating mode

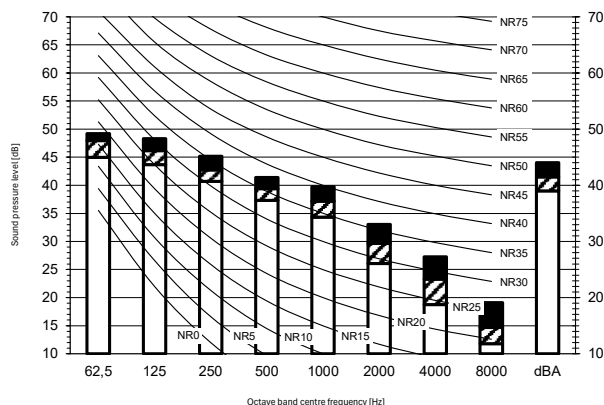

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B Fan speed: High
- C Fan speed: Medium
- D Fan speed: Low

Cooling	Total dB
A B C D	
dBa	39,0 36,5 34,0

Heating	Total dB
A B C D	
dBa	44,0 41,5 39,0

Location of microphone




Notes

- 1) Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 2) Background noise already taken into account.
- 3) Operating noise varies depending on operation and ambient conditions.
- 4) The operation noise measuring method is in accordance with JISC9612.
- 5) Measuring location: anechoic chamber


4D156884

FXSN80B

Cooling mode

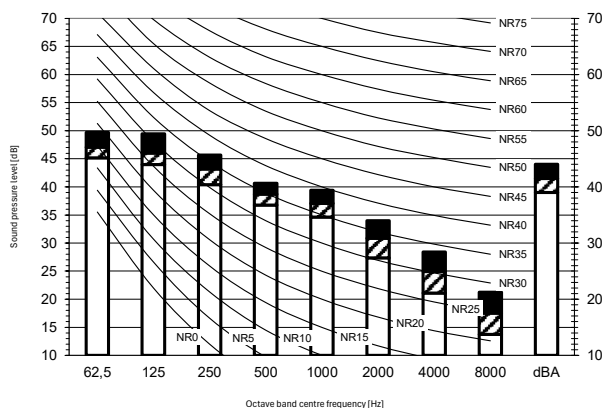

Heating mode

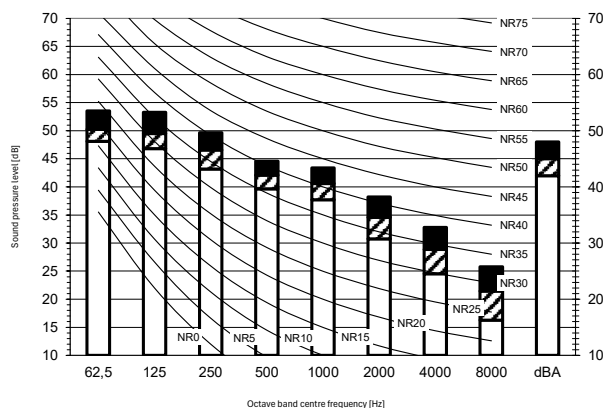

Legend


dBA = A-weighted sound pressure level (A scale according to IEC).

- A Scale
- B Fan speed: High
- C Fan speed: Medium
- D Fan speed: Low

Cooling	Total dB
A B C D	
dBa	44,0 41,5 39,0

Heating	Total dB
A B C D	
dBa	48,0 45,0 42,0

Location of microphone



Notes

- 1) Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 2) Background noise already taken into account.
- 3) Operating noise varies depending on operation and ambient conditions.
- 4) The operation noise measuring method is in accordance with JISC9612.
- 5) Measuring location: anechoic chamber


4D156885

11 Fan characteristics

11 - 1 Fan Characteristics


FXSN40B

(1) Fan characteristics

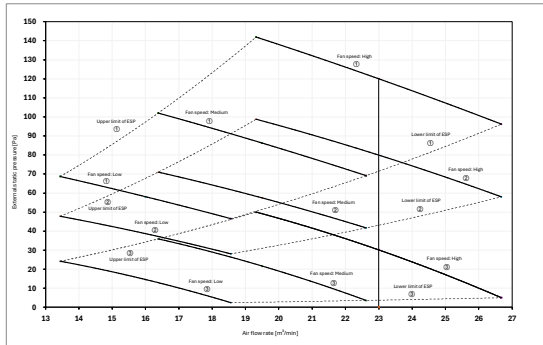


Mark	ESP [Pa]
①	Maximum 120
②	- 80
③	Standard 30

(2) Fan characteristics
Air flow auto adjustment

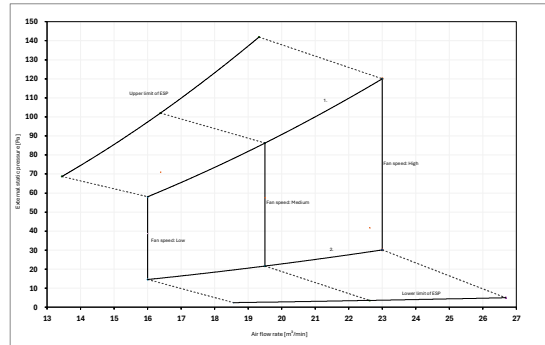

1. Upper limit of ESP by air flow auto adjustment
2. Lower limit of ESP by air flow auto adjustment

(3) Fan characteristics
Field setting with remote control

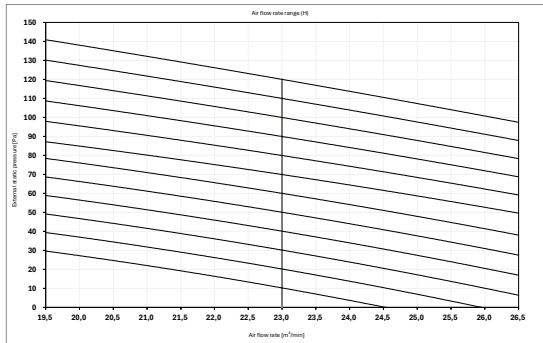


Notes
The fan characteristics shown are in "fan only" mode.
ESP: External Static Pressure

4D156628


FXSN50B

(1) Fan characteristics

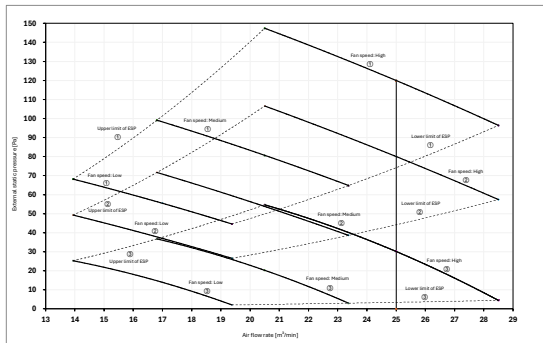


Mark	ESP [Pa]
①	Maximum 120
②	- 80
③	Standard 30

(2) Fan characteristics
Air flow auto adjustment

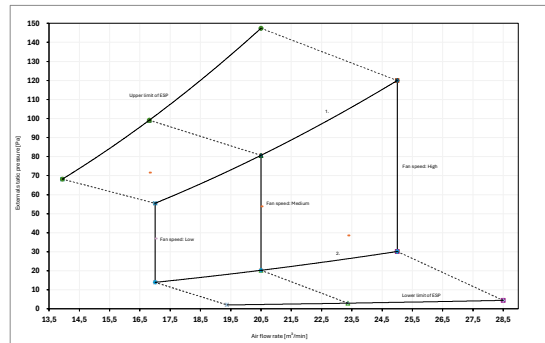

1. Upper limit of ESP by air flow auto adjustment
2. Lower limit of ESP by air flow auto adjustment

(3) Fan characteristics
Field setting with remote control

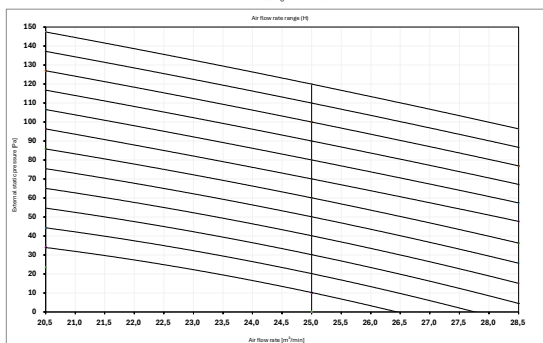

Notes
The fan characteristics shown are in "fan only" mode.
ESP: External Static Pressure

4D156629


11 Fan characteristics

11 - 1 Fan Characteristics

11


FXSN63B

(1) Fan characteristics

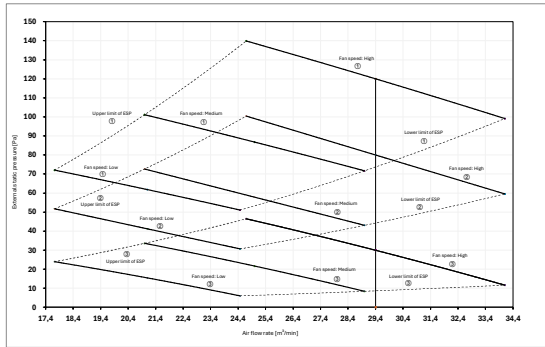


Mark	ESP [Pa]
①	Maximum 120
②	- 80
③	Standard 30

(2) Fan characteristics
Air flow auto adjustment

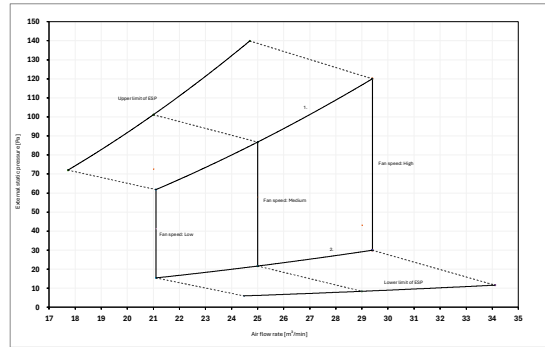

1. Upper limit of ESP by air flow auto adjustment
2. Lower limit of ESP by air flow auto adjustment

(3) Fan characteristics
Field setting with remote control

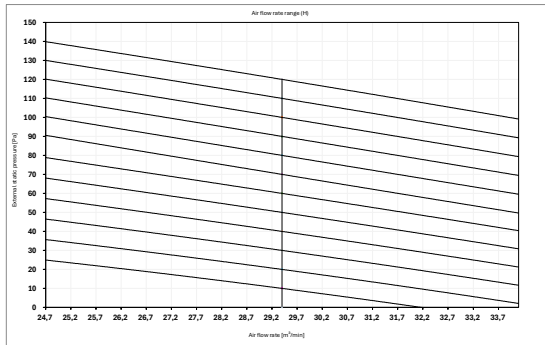


Notes
The fan characteristics shown are in "fan only" mode.
ESP: External Static Pressure

4D156630


FXSN80B

(1) Fan characteristics

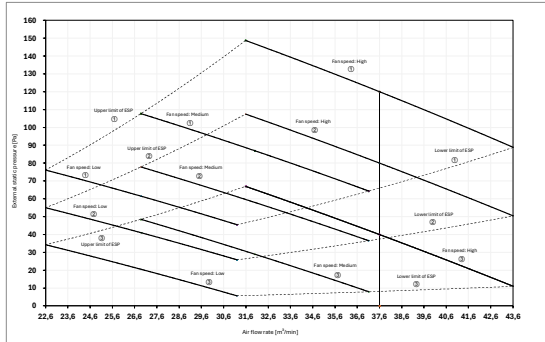


Mark	ESP [Pa]
①	Maximum 120
②	- 80
③	Standard 40

(2) Fan characteristics
Air flow auto adjustment

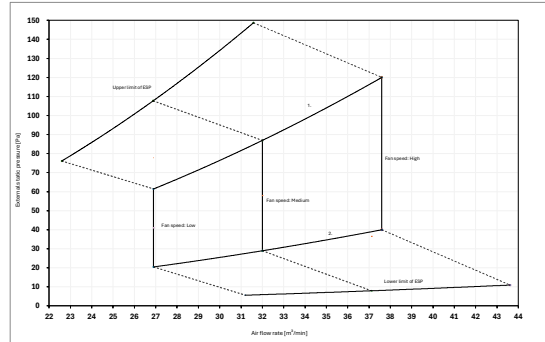

1. Upper limit of ESP by air flow auto adjustment
2. Lower limit of ESP by air flow auto adjustment

(3) Fan characteristics
Field setting with remote control

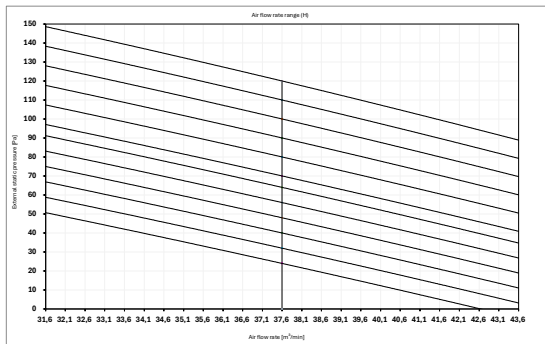

Notes
The fan characteristics shown are in "fan only" mode.
ESP: External Static Pressure

4D156631


12 Installation

12 - 1 Installation Method

FXSN-B


Installation methods

Rear suction




Ceiling return

Bottom suction




Ceiling return

Rear suction




Installation with duct

Number	Description	
①	Indoor unit	
②	Air outlet duct	Field supply
③	Air inlet duct	Field supply

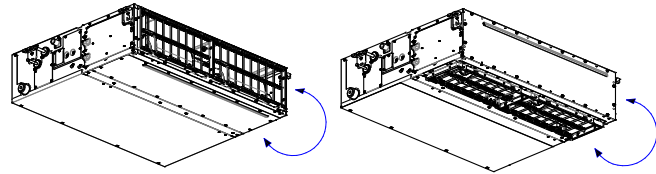


Easy modification from rear suction to bottom suction



Height of drain pump outlet pipe

3D125711



EEDEN25

04/2025



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.