

Streamer technology Air Purifiers Technical Data MC55VB





Table of contents

MC55VB

1	Features	4
	MC55VB	2
2	Specifications	
3	Dimensional drawings Dimensional Drawings	6
4	Wiring diagrams Wiring Diagrams - Single Phase	7





1 Features

1 - 1 MC55VB

- > Pure air thanks to active plasma ion discharge and flash streamer technology
- > High performacne HEPA filter to catch fine particles of dust
- > Powerful suction and whisper quiet
- > New stylish and compact design





Flash Streamer



Specifications

MC55VB

Technical Specifications					MC55VB		
Туре					Air Purifier		
Application					Floor standing type		
Casing	Colour				White		
Dimensions	Unit	Height mm		mm	500		
		Width mm		mm	270		
		Depth mm		mm	270		
	Packed	Height mm		mm	330		
	unit	Width mm		mm	598		
		Depth mm		mm	330		
Weight	Unit	kg		kg	6.8		
	Packed un	d unit kg			10		
Applicable room	Applicable room area m ²			41			
Air purifying	Power	Turbo		kW	0.037		
operation	input	M kW		kW	0.015		
		L		kW	0.010		
		Silent		kW	0.008		
Sound pressure	Air	Turbo dBA		dBA	53		
level	purifying	Medium		dBA	39		
	operation	Low		dBA	29		
		Silent		dBA	19		
Fan	Type				Multi Blade Fan (Sirocco fan with shroud assembly)		
	Air flow	Air	Turbo	m³/h	330		
	rate	purifying	Medium	m³/h	192		
		operation	Low	m³/h	120		
			Silent	m³/h	66		
Fan motor	Speed	Drive			Direct drive		
Dust collecting m	ethod				Electrostatic HEPA filter		
Deodorizing method			Flash streamer + Deodorizing catalyst				
Air filter	Туре				Polyethylene terephthalate net		
Sign	Item	01			Dust: 3 stages / Odour: 3 stages / Anti-pollen mode / Child proof lock lamp / PM 2. 5 sensor lamp: 6		
					stages / Airflow rate (LL/L/M/H) / Auto fan mode (LL-H) / Econo mode / ON/OFF lamp / Streamer lamp		
Safety devices	Item	01			Safety switch (Operation stops when the Streamer unit cover is open)		

Standard accessories: Wireless remote control; Quantity: 1; Standard accessories: Electrostatic HEPA filter; Quantity: 1; Standard accessories: Operation manual; Quantity: 1;

Electrical Specifications				MC55VB		
Power cord			m	18		
Power supply	Phase			1~		
	Frequency		Hz	50/60		
	Voltage		V	220-240/220-230		
	Plug	Туре		UK plug		
Running current	Air purifying	Turbo	Α	0.32		
	operation	Medium	Α	0.14		
		Low	Α	0.10		
		Silent	Α	0.08		

The applicable room area is appropriate for operating the unit of maximum fan speed (HH). Applicable room area indicates the space where a certain amount of dust particles can be remover in 30 minutes. (JEM 1467) |

Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) |


Electrostatic HEPA filter is attached in the unit. |

Other function: Active plasmation function. Auto-restart function.



3 Dimensional drawings


3 - 1 Dimensional Drawings

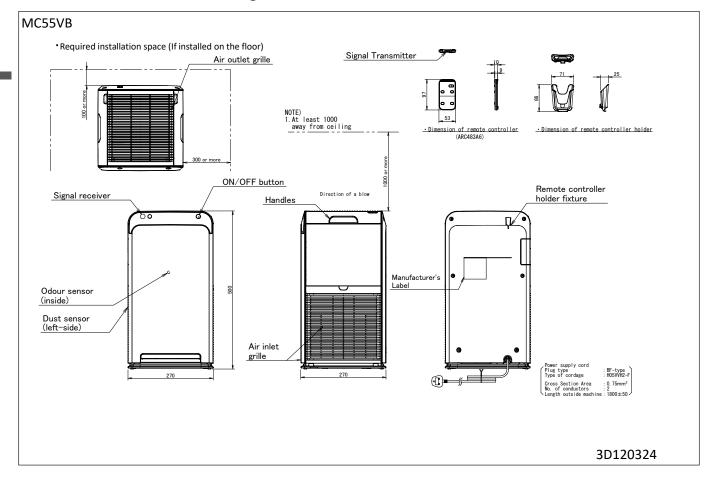



4 Wiring diagrams

4 - 1 Wiring Diagrams - Single Phase

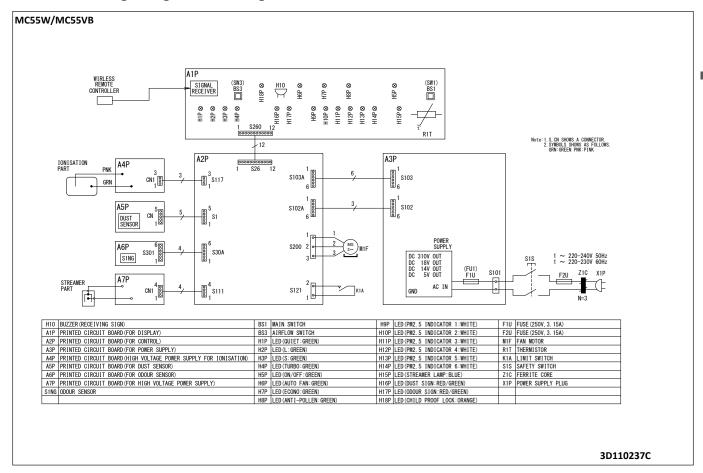

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oost	tende · Belgium · w	ww.daikin.eu	The present leaflet is drawn up by way of information only and does not constitute an
	EEDEN20	03/2020	offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.