


# 4 Dimensional drawings

## 4 - 1 Dimensional Drawings

### MCK55W


• Required installation space (If installed on the floor)

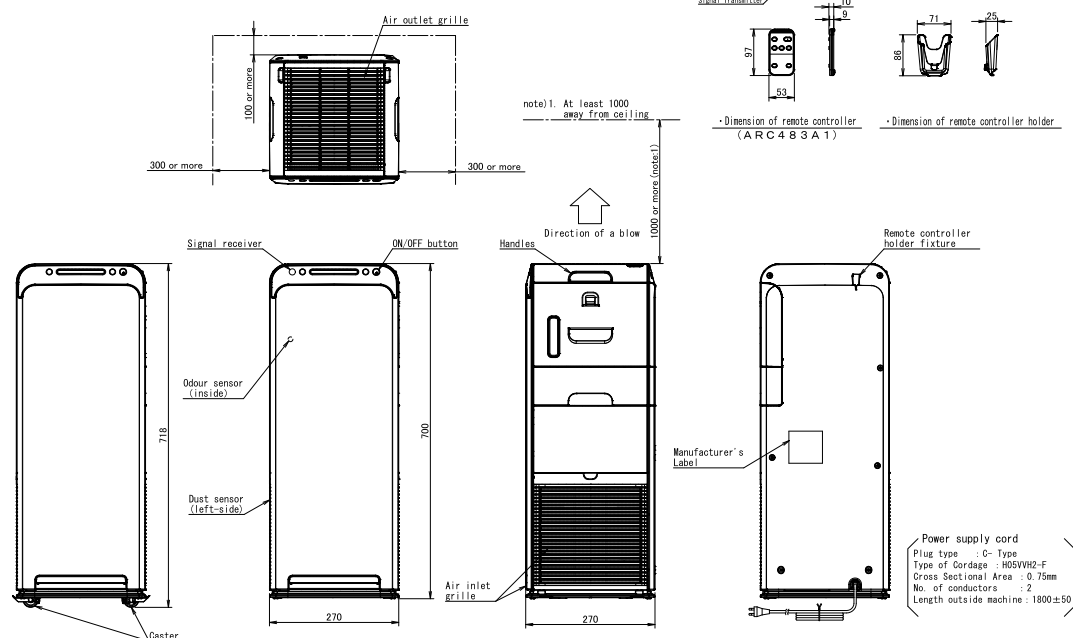

3D125932


### MC55W MC55VB MCK55W

• Outside size

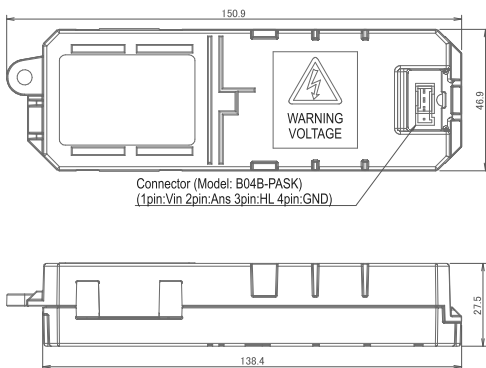

• Method of mounting

Don't blockage the vent of streamer unit.  
Ensure the exit wind speed 0.2m/sec of the vent.  
Ensure the spatial distance 8.5mm over at the vent of streamer unit.

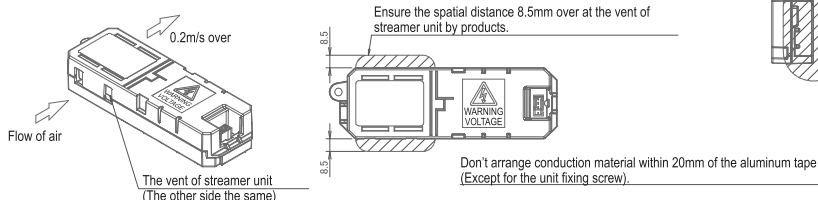

• Main specifications

Items	Outside size	Contents
Outside	Weight	150.9×46.9×27.5mm
Material of resin	Material	100g
	Flame retardance	ABS
	Tracking index	UL94-5VA
Applicable laws		Over CT1600V
Ambient conditions	Storage temperature	Electrical Appliance and Material Safety Act
	Operating ambient temperature	IEC60335-1(4th), IEC60335-2-65(4th)
	Operating ambient humidity	-25~70 (Non-Energization)
Basic specifications	Input voltage	-10~60 (Energization)
	Maximum output voltage	5~95%RH (No dew deposit)
	Rating output voltage	14V±5%
	Rating output current	6.5±0.5kV
	ON/OFF	5.0±0.5kV
	Hi ↔ Lo Switching	55.5μA±10%
	Current monitor	10μA±10%
	Detectable over current	Inputted voltage into Vin (ON/OFF)
	Detectable low voltage	Inputted 5V into HL (Loe tap)
Generation amount of Ozone		Yes
Method of mounting		Yes
		Under 3kV
		4.26ml/hr (Hi 14±2; 50±10%RH)
		Fixing by the right and left hook
		Fixing by the screw section

3D095530G