



SB.RKXYQ-T

VRV IV i-series

The Daikin i-Series VRV system is designed to allow VRV installations with no external plant.

This air conditioning solution is unique in the market and makes complying with planning easier in areas where condensers are subject to sound or "line of sight" restrictions.


Unique split unit for indoor installation

The condenser is split into two sections, a compressor module and a separate heat exchanger & fan unit.

The compressor module can be easily installed indoors with its small 600 x 554mm footprint and low 47 dBA sound level and the heat exchanger can be installed above the ceiling and ducted to the outside air to bring all of the Daikin air cooled VRV IV benefits including Variable Refrigerant temperature control to buildings where it may not have been possible before.

Features and benefits:

- > Unique VRV indoor solution
- > Seamless integration into surrounding architecture
- > Total flexibility for any shop location and building type due to the unlimited possibilities of our solutions
- > Premises can be opened sooner as building permits are easier and faster to obtain
- > The 'outdoor' air conditioning unit can now be fitted indoors, where previously this was not an option
- > Easy to comply with planning regulations, the best solution for urban locations such as banks, shops or almost any other application you can think of

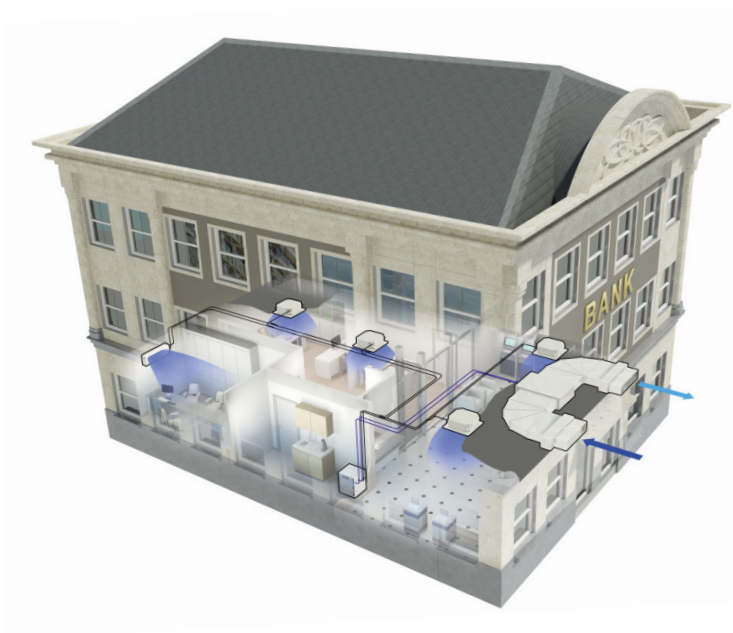


SB.RKXYQ-T

Outdoor system				SB.RKXYQ	5T
Capacity range				HP	5
Cooling capacity / Heating capacity	Nom.			kW	14 / 14
EER / COP					3.2 / 3.8
Maximum number of connectable indoor units					10
Indoor index connection	Min. / Nom. / Max.				62.5 / 125 / 162.5
Operation range - outdoor air temperature	cooling	Min.~Max.	°CDB		-5 ~ 46
	Heating	Min.~Max.	°CWB		-20 ~ 15.5
Refrigerant	Type / GWP		kg / TCO2		R-410A / 2,087.5
Piping connections between compressor module (CM) and heat exchanger module (HM)	Liquid	OD	inch (mm)		1/2 (12.7)
	Gas	OD	inch (mm)		3/4 (19.1)
	Maximum length		m		30
	Max height difference - CM below HM		m		10
	Max height difference - CM above HM		m		10
Piping connections between compressor module (CM) and indoor units (IU)	Liquid	OD	inch (mm)		3/8 (9.5)
	Gas	OD	inch (mm)		5/8 (15.9)
	Max total piping length (incl. piping to HM)		m		10-140*
	Max length to last IU		m		70 (90 equivalent)
	Max height difference - CM below IU		m		30
	Max height difference - CM above IU		m		30
	Max height difference - IU - IU		m		15
Heat exchanger module				RDXYQ	5T
Dimensions	Height x Width x Depth			mm	397 x 1456 x 1044
Weight				kg	97
Ambient installation temperatures	Min~Max		°CDB		5 ~ 35
	Suction size		mm		1200 x 300
Ducting	Discharge size		mm		1200 x 300
	Max ESP		Pa		150
	Nom. air flow		m³/sec		0.917
Sound pressure level				dBa	47
Drain pipe	OD			mm	32
Power supply	Phase / Frequency / Voltage				1~ / 50 Hz / 220-240V
Compressor module				RKXYQ	5T
Dimensions	Height x Width x Depth			mm	701 x 600 x 554
Weight				kg	77
Refrigerant charge				kg	2,0
Ambient installation conditions	Min~Max		°CDB		5 ~ 35
Sound pressure level				dBa	47
Power supply	Phase / Frequency / Voltage				3~ / 50 Hz / 380-415V

Installation example

30m of pipework can be used between the compressor module (CM) and Heat exchanger (HM)

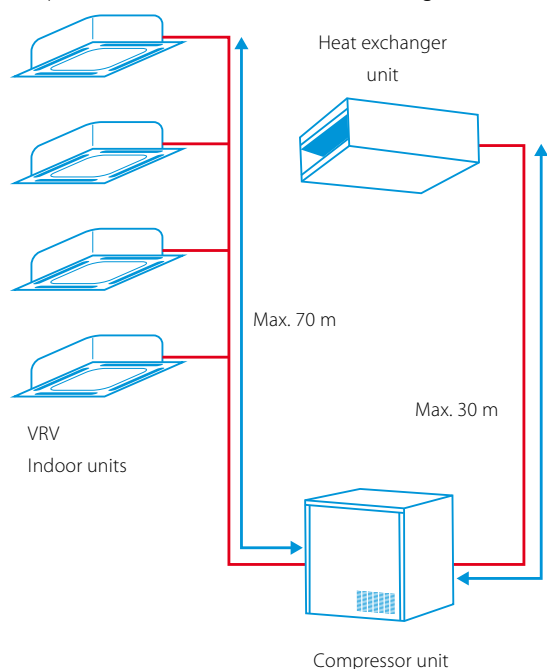

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.

Total Piping length possibilities

(a) = HM <> CM	(b) = CM <> IU	(c) = (a) + (b)
5	135	140
10	125	135
15	115	130
20	105	125
25	95	120
30	85	115

