DAIKIN

FTXF-F / MXF-B

sensira




Sensira Multi Split

Economy Multi-split system, for perfect comfort with maximum value.

The flat front panel blends in easily with any interior décor and is easy to clean. Air is distributed efficiently and evenly, thanks to auto-swing louvres, which direct the discharge air downwards or upwards. Turbo mode means that the room can heat up or cool down rapidly.

Built in Wi-Fi as standard

Replacement Technology

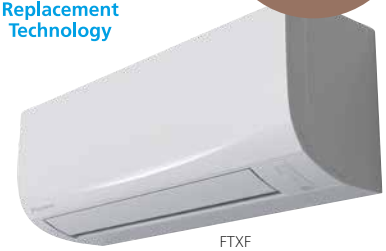

FTXF

Seasonal efficiency values up to A++

Seasonal efficiencies up to A++ in cooling and A+. Sensira Multi+ uses advanced heat exchanger and airflow technologies to produce best in class efficiencies

Quiet operation down to 20 dB(A)

The different fan settings mean the Daikin Sensira wall mounted unit can be used in offices, hallways, living and bed rooms. With a sound pressure of 20 d(BA), the unit is whisper quiet.

Daikin Onecta App

The Daikin Onecta App controls your indoor unit from any location via connection to the cloud. Main functions like temperature set point, operation mode, fan speed, etc can also be controlled via Amazon Alexa or Google Assistant.


Reliable performance

The extensively tested swing compressor uses inverter technology and small capacity steps to adjust a unit's power and energy demands, delivering energy savings and vibration-free operation.



3MXF52-68B

2MXF40-50B





BRC073
(optional)



ARC470A1



BRP069C47

FTXF-F / MXF-B

sensira

R-32 BLUEVOLUTION

Indoor Units			FTXF20F	FTXF25F	FTXF35F	FTXF42F
Capacity	UK Total Cooling	kW	1.95	2.44	3.22	4.07
	UK Sensible Cooling	kW	1.69	1.94	2.35	2.97
	Nominal Cooling	kW	2.00	2.50	3.30	4.20
	Nominal Heating	kW	2.40	2.80	3.80	4.30
Air Flow Rate (Cooling)	High / Medium / Low / Silent	m^3/min	0.163 / 0.133	0.167 / 0.133	0.192 / 0.133	0.210 / 0.150
			0.100 / 0.072	0.103 / 0.072	0.107 / 0.073	0.115 / 0.082
Dimensions	Height	mm	286	286	286	286
	Width	mm	770	770	770	770
	Depth	mm	225	225	225	225
Weight		kg	8	8	8.5	9
Sound Pressure (Cooling)	High / Medium / Low / Silent	dBA	39/33/25/20	40/33/26/20	43/34/27/20	45/36/30/22
Sound Pressure (Heating)	High / Medium / Low / Silent	dBA	39/34/28/21	40/34/28/21	40/35/29/21	44/34/28/22
Sound Power (Cooling)		dBA	53	54	54	59

Indoor Units		FTXF20F	FTXF25F	FTXF35F	FTXF42F
Outdoor Units	2MXF40B	•	•	•	
	2MXF50B	•	•	•	
	3MXF52B	•	•	•	•
	3MXF68B	•	•	•	•

Outdoor Units			2MXF40B	2MXF50B	3MXF52B	3MXF68B
Capacity	Nominal Cooling	kW	4.0	5.0	5.2	6.8
	Nominal Heating	kW	4.2	5.6	6.8	8.6
Dimensions	Height x Width x Depth	mm	550 x 765 x 285	550 x 765 x 285	734 x 958 x 340	734 x 958 x 340
Weight		kg	36	41	57	62
Electrical Details	Power Supply	Phase	1ph	1ph	1ph	1ph
		Hz	50	50	50	50
		V	220-240	220-240	220-240	220-240
	Maximum Input Current (MCA)	A	9.8	12.83	14.59	17.19
	Max Fuse Size	A	16	16	16	20
Refrigerant Circuit	Refrigerant Type		R32	R32	R32	R32
	Refrigerant Charge	kg	0.88	1.15	1.80	2.00
Sound Pressure (Cooling)	Nom	dBA	46	48	46	48
Sound Power (Cooling)		dBA	48	50	47	48
Piping Limits	Max. Length (to 1 unit)	m	20	20	25	25
	Max. Level Difference (IU- OU)	m	15	15	15	15
	Total piping length (Actual)	m	30	30	50	50
Piping Connections	Liquid	inches (mm)	2x 1/4 (6.4)	2x 1/4 (6.4)	3x 1/4 (6.4)	3x 1/4 (6.4)
	Gas	inches (mm)	2x 3/8 (9.5)	2x 3/8 (9.5)	3x 3/8 (9.5)	3x 3/8 (9.5)
Operating range (Cooling)	Min / Max	°CDB	-10 / 46	-10 / 46	-10 / 46	-10 / 46
Operating range (Heating)	Min / Max	°CWB	-15 / 18	-15 / 18	-15 / 18	-15 / 18
Number of Connected Indoor Units			2	2	3	3
Air Flow Rate (Cooling)	Nom	m^3/sec	0.600	0.617	0.700	0.708

Accessories:

Accessory Ref	Description
BRC073	Optional wired remote controller BRC1E53A style - Connection cable required.
KRP980A1	Interface adaptor for wired remote controller BRC073 - for class 20-50
BRCW901A03	3m connection cable for BRC073
BRCW901A08	8m connection cable for BRC073
K.CWB90-2	Wall bracket (90kg, 500mm support arm)
K.DT1	Condensate drip tray for use with K.CWB90-2
K.FF600S	Two flexi-feet (Standard) to mount the outdoor unit
K.CGM	Condensing unit guard size (1150 x 1150 x 650)

Notes & Features:

- Seasonal efficiency values up to A++ in cooling and A+ in heating thanks to its modern technology and built-in intelligence
- Up to 3 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode
- Fan coils are supplied with controller ARC480A93
- Built in Wi-Fi as standard
- Whisper-quiet in operation down to 20 dBA
- The unit's compact dimensions make it ideal for renovation projects, especially for above door installation
- Space-saving contemporary wall-mounted design
- Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin UK.

EUROVENT CERTIFIED PERFORMANCE www.eurovent-certification.com

CE

LRQA CERTIFIED UKAS MANAGEMENT SYSTEMS

FSC

Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU), Check ongoing validity of certificate online: www.eurovent-certification.com

Daikin Airconditioning UK Limited The Heights Brooklands Weybridge Surrey KT13 0NY Tel 01932 879000 daikin.co.uk

UKEPLEN26-1198/ 10.26 / Copyright 2026 Daikin